

CONQUER In-Line Fuse Holder



CONQUER Dual Type Fuse Puller



Specification Guide Codes:

A = Item Number

B = Rated Current

C = Insulation Resistance At 500 V DC

D = Contact Resistance

E = Dielectric Strength For 60 Seconds

F = Body Material

G = Supply Standard UL Wire-AWG/Length

• Contact : Brass, Tin / Nickel Plated

• With Other Wire Size Or Lengths Available On Special Order.

• To Install Fuses With "Loop" Type Wires, Simply Cut Loop Into Two Separate Wires Of Desired Length.

- Durable Single Piece Design Is Convenient For Fuse Removal And Replacement.
- A Must For All Car Owners.
- Made Of Hard Durable Plastic.

IN-LINE FUSE HOLDER FOR BLADE TYPE FUSES



CQ-211SN RoHS

B: 30A

C: 100MΩ Min

D: 5mΩ At 1A DC


E: AC1000V Min.

F: P.V.C.

G: 12#AWG / 10" Loop

Water Resistant Type


For AST Blade Type Fuses

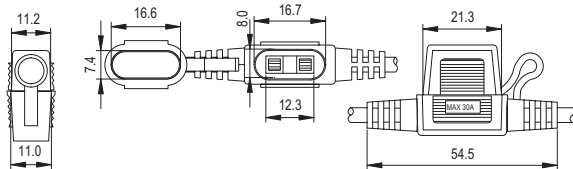

Dual Type Fuse Puller


CQ-213

- Pulls And Installs Both Glass Type Fuses And ATQ Blade Fuses.

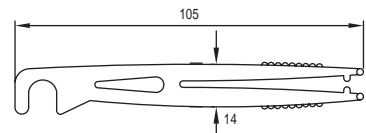

CQ-223

- Pulls And Installs Both Glass Type Fuses And ATQ Blade Fuses.



CQ-211MI RoHS

B: 80A

C: 100MΩ Min

D: 5mΩ At 1A DC


E: AC3000V Min.

F: P.V.C.

G: 8#AWG / 5" x 2


Water Resistant Type

For AMT (MAX) Blade Type Fuses

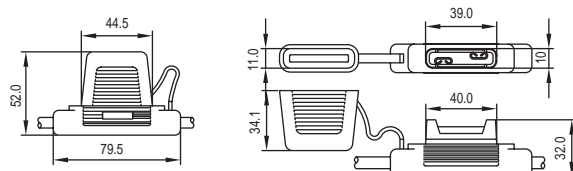

CQ-224

- Pulls And Installs Both Glass Type Fuses And MINI Blade Fuses.

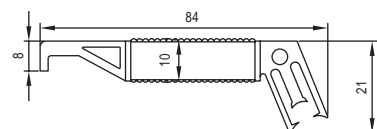

90

Conquer Electronics Co., Ltd.

Conquer Electronics Co., Ltd.

No. 26, Wucyuan 5th Road, Wugu Township, Taipei County 248, Taiwan. TEL: 886-2-8990-2189 (Rep.) FAX: 886-2-8990-2577

E-mail: concfuse@ms62.hinet.net Homepage: <http://www.conquer.com.tw>