

## CAM SWITCH AMMETER & VOLTMETER SELECTOR



### DESCRIPTION / APPLICATION


This series rotary switch mainly applies to 440V and below, AC 50Hz or 240V and below DC circuits. For switch on and off, conversing of circuits under unfrequently manual operation.

It is in conformity with IEC 60947-3, IEC 60947-5-1 standard.

### MAIN TECHNICAL DATA


<b>Rated Insulation Voltage (Ui V)</b>	690
<b>Rated Thermal Current (Ith A)</b>	20A
<b>Rated Working Voltage (Ue V)</b>	24 110 240 440
<b>Rated Working Current (Ie)</b>	
AC-21A AC-22A    A	20    20
AC-23A            A	15    15
AC-2              A	15    15
AC-3              A	11    11
AC-4              A	3.5    3.5
AC-15             A	5      4
AC-13             A	12 0.4    0.4
<b>Rated Power (P)</b>	
AC-23A           KW	3.7/2.5    7.5/3.7
AC-2              KW	4          7.5
AC-3              KW	3/2.2    5.5/3
AC-4              KW	0.55/0.75    1.5/1.5

## Outline and Dimension

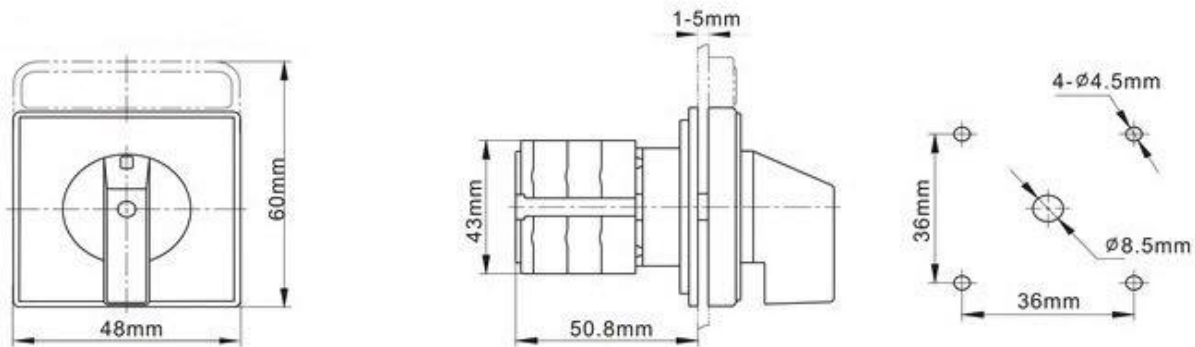


## Wiring Diagram

CS-AS-4-10A

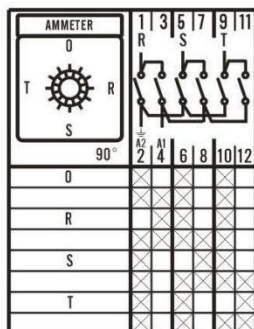


To validate the warrantee this product has to be installed by a qualified person.

CS-VS-4-10A



To validate the warrantee this product has to be installed by a qualified person.

CS-VS-7-10A



To validate the warrantee this product has to be installed by a qualified person.