


RIGOL

WWW.RIGOL-UK.CO.UK

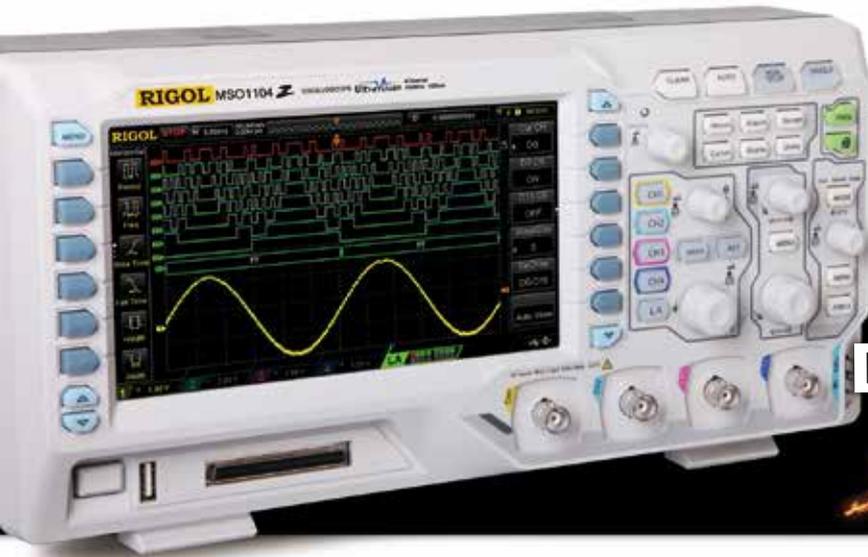

MSO/DS1000Z Series Digital Oscilloscope

UltraVision


- Analog channel bandwidth: 100 MHz, 70 MHz, 50 MHz
- 4 analog channels, 16 digital channels (for MSO1000Z and MSO upgradable for DS1000Z Plus)
- Real-time sample rate up to 1 GSa/s
- Memory depth up to 12 Mpts (standard)/24 Mpts (optional)
- Up to 30,000 wfms/s waveform capture rate
- Up to 60,000 frames hardware real-time waveform recording and playback functions (optional)
- Innovative "UltraVision" technology
- MSO field upgradable with MSO1000Z upgrade package (MSO upgrade option, only for DS1000Z Plus)
- Various trigger and bus decoding functions
- Low noise floor, vertical scale range: 1 mV/div to 10 V/div
- Built-in dual-channel 25 MHz function/arbitrary waveform generator (only for digital oscilloscope with source channels)
- Various interfaces: USB Host&Device, LAN (LXI), AUX
- Compact size, light weight, easy to use
- 7 inch WVGA (800x480) TFT LCD, intensity graded color display

MSO/DS1000Z series is a high-performance and economic digital oscilloscope designed for the designing, debugging and educational requirements of the mainstream digital oscilloscope market. Wherein, the mixed signal digital oscilloscope aimed at the embedded design and test fields is equipped with 16 digital channels and allows users to measure analog and digital signals at the same time.

RIGOL TECHNOLOGIES, INC.

MSO/DS1000Z Series Digital Oscilloscope

7 inch WVGA (800X480) TFT display, intensity graded color display

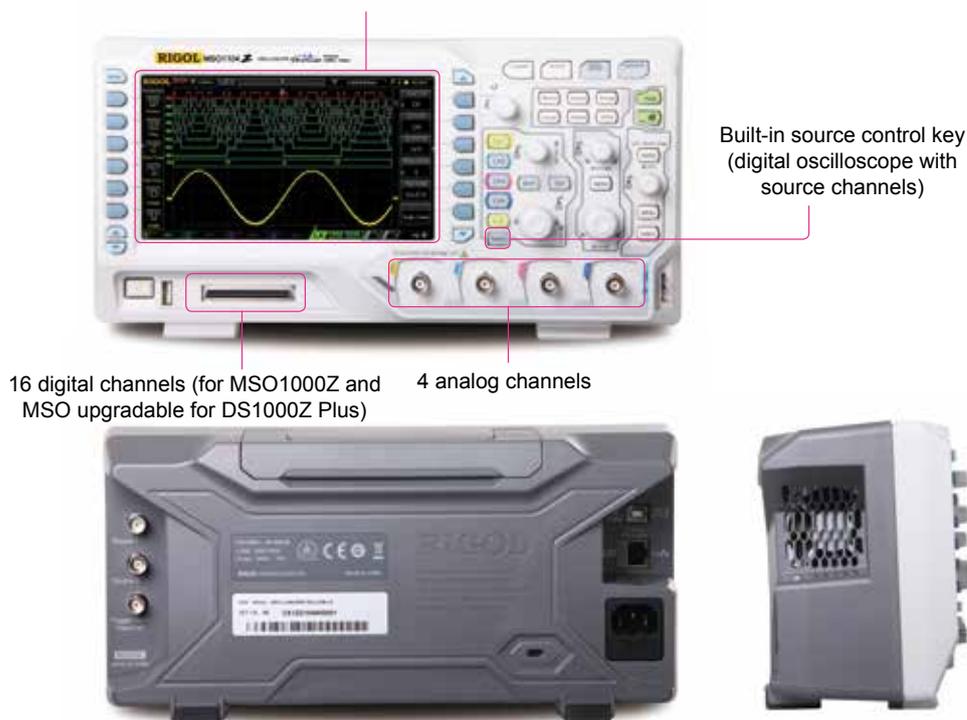

16 digital channels (for MSO1000Z and MSO upgradable for DS1000Z Plus) 4 analog channels

Product Dimensions: Width×Height×Depth=313.1 mm×160.8 mm×122.4 mm
Weight: 3.2 kg ± 0.2 kg(Without Package)

► Innovative UltraVision Technology(Analog Channel)




- Deeper Memory Depth (standard 12 Mpts, optional 24 Mpts)
- Higher Waveform Capture Rate (up to 30,000 wfms/s)
- Real-time Waveform Recording&Playback (up to 60,000 frames, optional)
- Intensity Graded Color Display

► Models and Key Specifications

| Model | DS1054Z | DS1074Z Plus | DS1074Z-S Plus | DS1104Z Plus | DS1104Z-S Plus |
|--|--|---|----------------|--------------|----------------|
| | | MSO1074Z | MSO1074Z-S | MSO1104Z | MSO1104Z-S |
| Analog BW | 50 MHz | 70 MHz | | 100 MHz | |
| Number of Analog Channels | 4 | | | | |
| Number of Digital Channels | None | 16 digital channels for MSO1000Z; MSO upgradable for DS1000Z Plus | | | |
| Max. Sample Rate | Analog channel: 1 GSa/s (single-channel), 500 MSa/s (dual-channel), 250 MSa/s (three/four-channel) Digital channel: 1 GSa/s (8-channel), 500 MSa/s (16-channel) | | | | |
| Max. Memory Depth | Analog channel: standard 12 Mpts (single-channel), 6 Mpts (dual-channel), 3 Mpts (3/4-channel); optional 24 Mpts (single-channel), 12 Mpts (dual-channel), 6 Mpts (3/4-channel) Digital channel(MSO): standard 12 Mpts (8-channel), 6 Mpts (16-channel); optional 24 Mpts (8-channel), 12 Mpts (16-channel) | | | | |
| Max. Waveform Capture Rate | 30,000 wfms/s | | | | |
| Hardware Real-time Waveform Recording and Playback Functions | Up to 60,000 frames (optional) | | | | |
| Std. Probes | RP2200 150 MHz Passive HighZ Probe: 4 sets; 1 set RPL1116 LA Probe for MSO1XX4Z/1XX4Z-S | | | | |
| Built-in 2Ch 25MHz Source | No | Yes | No | Yes | Yes |

► Features and Benefits

4 analog channels, 16 digital channels (for MSO1000Z and MSO upgradable for DS1000Z Plus)

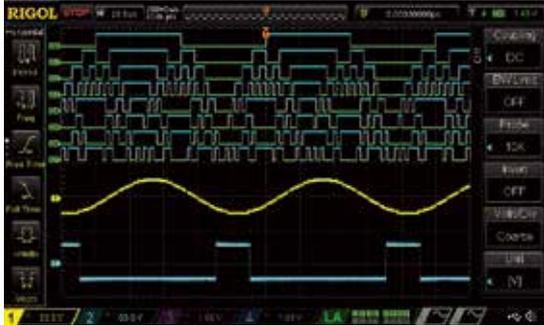

UltraVision: deeper memory (standard 12 Mpts, optional 24 Mpts)



UltraVision: up to 30,000 wfms/s waveform capture rate



UltraVision: intensity graded color display




UltraVision: waveform recording and playback functions (optional)




A variety of trigger functions



Built-in dual-channel 25 MHz source (MSO1XX4Z-S and DS1XX4Z-S Plus)

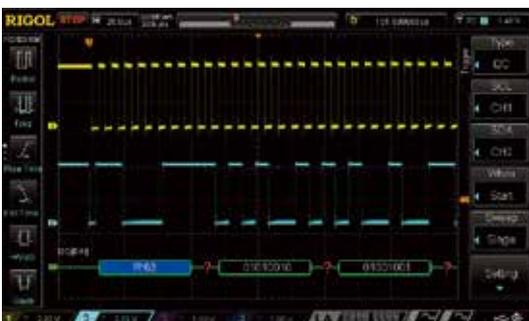

Optional serial bus trigger and decoding functions (RS232/UART, I2C, SPI)

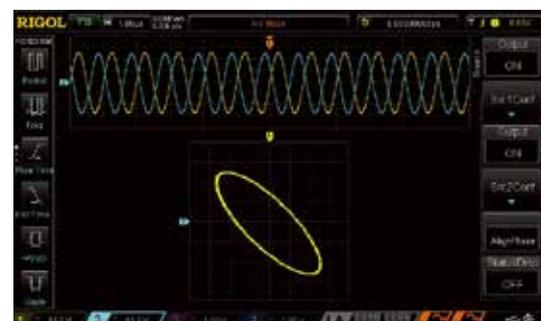

*Do not include the 50 MHz bandwidth model

► Mixed Signal Digital Oscilloscope



*Do not include the 50 MHz bandwidth model

The mixed signal digital oscilloscope also provides the following functions:

- 16 digital channels for MSO1000Z and MSO upgradable for DS1000Z Plus
- Sample rate of digital channel up to 1 GSa/s
- Memory depth of digital channel up to 24 Mpts
- Waveform capture rate of digital channel up to 30,000 wfms/s
- Hardware real-time waveform recording and playback functions, up to 60,000 frames can be recorded
- Trigger and decoding of the analog and digital channels at the same time
- Easy grouping and group operation of the digital channels
- Support a variety of logic levels
- Trigger across the analog and digital channels
- Time correlated display and analysis for both the analog and digital channel waveforms

Innovative UltraVision Technology (Digital Channel)

UltraVision

- Deeper memory depth (up to 24 Mpts)
- Higher waveform capture rate (up to 30,000 wfms/s)
- Real-time waveform recording and playback functions (up to 60,000 frames)
- Intensity graded color display

Mixed signal analysis with analog and digital channels




Easy to be grouped and labeled for digital channels



Deeper memory depth for the digital channels, serial bus trigger and decoding on digital channels



Supports a variety of logic levels

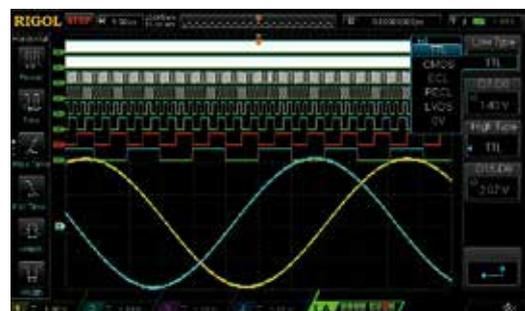

RIGOL Probes and Accessories Supported by MSO/DS1000Z Series

► RIGOL Passive Probes

| Model Number | Type | Description |
|--|----------------------|---|
|  RP2200 | High Z Probe | 1X: DC to 7 MHz 10X: DC to 150 MHz Compatibility: all RIGOL scopes. |
|  RP3300A | High Z Probe | 10X: DC to 350 MHz Compatibility: all RIGOL scopes. |
|  RP3500A | High Z Probe | DC to 500 MHz Compatibility: all RIGOL scopes. |
|  RP1300H | High Voltage Probe | DC to 300 MHz CAT I 2000 V (DC+AC), CAT II 1500 V (DC+AC) Compatibility: all RIGOL scopes. |
|  RP1010H | High Voltage Probe | DC to 40 MHz DC: 0 to 10 kV DC, AC: pulse ≤ 20 kVp-p, AC: sine wave ≤ 7 kVrms Compatibility: all RIGOL scopes. |
|  RP1018H | High Voltage Probe | DC to 150 MHz DC+AC Peak: 18 kV CAT II AC RMS: 12 kV CAT II Compatibility: all RIGOL scopes. |
|  RPL1116 | Logic Analysis Probe | Logic analysis probe (for mixed signal digital oscilloscope) |
|  RT50J | Adapter | 50 Ω impedance adapter (2 W, 1 GHz) |

► RIGOL Active & Current Probes

| Model Number | Type | Description |
|--|---------------------------------|--|
|  RP1001C | Current Probe | BW: DC to 300 kHz Max. input DC: ± 100 A, AC P-P: 200 A, AC RMS: 70 A Compatibility: all RIGOL scopes. |
|  RP1002C | Current Probe | BW: DC to 1 MHz Max. input DC: ± 70 A, AC P-P: 140 A, AC RMS: 50 A Compatibility: all RIGOL scopes. |
|  RP1003C | Current Probe | BW: DC to 50 MHz Max. input AC P-P: 50 A (Noncontinuous), AC RMS: 30 A Compatibility: all RIGOL scopes. Must order RP1000P power supply. |
|  RP1004C | Current Probe | BW: DC to 100 MHz Max. input AC P-P: 50 A (Noncontinuous), AC RMS: 30 A Compatibility: all RIGOL scopes. Must order RP1000P power supply. |
|  RP1005C | Current Probe | BW: DC to 10 MHz Max. input AC P-P: 300 A (Noncontinuous), 500 A (@pulse width ≤ 30 us), AC RMS: 150 A Compatibility: all RIGOL scopes. Must order RP1000P power supply. |
|  RP1000P | Power Supply | Power supply for RP1003C, RP1004C and RP1005C, support 4 channels. |
|  RP1025D | High Voltage Differential Probe | BW: 25 MHz Max. Voltage ≤ 1400 Vpp Compatibility: all RIGOL scopes. |
|  RP1050D | High Voltage Differential Probe | BW: 50 MHz Max. Voltage ≤ 7000 Vpp Compatibility: all RIGOL scopes. |
|  RP1100D | High Voltage Differential Probe | BW: 100 MHz Max. Voltage ≤ 7000 Vpp Compatibility: all RIGOL scopes. |

► Specifications

All the specifications are guaranteed except parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature.

Sample

| | |
|----------------------------|---|
| Sample Mode | Real-time sample |
| Real-time Sample Rate | Analog channel: 1 GSa/s (single-channel), 500 MSa/s (dual-channel), 250 MSa/s (three/four-channel) Digital channel: 1 GSa/s (8-channel), 500 MSa/s (16-channel) |
| Peak Detect | Analog channel: 4 ns Digital channel: 4 ns |
| Averaging | After all the channels finish N samples at the same time, N can be 2, 4, 8, 16, 32, 64, 128, 256, 512 or 1024. |
| High Resolution | 12 bit (max.) |
| Interpolation | Sin(x)/x (optional) |
| Minimum Detect Pulse Width | Digital channel: 10 ns |
| Memory Depth | Analog channel: standard 12 Mpts (single-channel), 6 Mpts (dual-channel), 3 Mpts (three/four-channel); optional 24 Mpts (single-channel), 12 Mpts (dual-channel), 6 Mpts (three/four-channel) Digital channel: standard 12 Mpts (8-channel), 6 Mpts (16-channel); optional 24 Mpts (8-channel), 12 Mpts (16-channel) |

Input

| | |
|-------------------------------|---|
| Number of Channels | MSO1XX4Z/1XX4Z-S: 4 analog channels, 3 analog channels+8 digital channels, 2 analog channels+16 digital channels DS1XX4Z Plus/1XX4Z-S Plus: 4 analog channels, MSO upgradable DS1054Z: 4 analog channels |
| Input Coupling | DC, AC or GND |
| Input Impedance | Analog channel: (1 MΩ±1%) (15 pF±3 pF) Digital channel: (100 kΩ±1%) 8 pF±3 pF |
| Probe Attenuation Coefficient | Analog channel: 0.01X to 1000X, in 1-2-5 step |
| Maximum Input Voltage (1 MΩ) | Analog channel: CAT I 300 Vrms, CAT II 100 Vrms, transient overvoltage 1000 Vpk With RP2200 10:1 probe: CAT II 300 Vrms Digital channel: CAT I 40 Vrms, transient overvoltage 800 Vpk |

Horizontal

| | |
|--------------------------------------|--|
| Timebase Scale | 5 ns/div to 50 s/div |
| Maximum Record Length | 24 Mpts (optional) |
| Timebase Accuracy ^[1] | ≤ ± 25 ppm |
| Clock Drift | ≤ ± 5 ppm/year |
| Maximum Delay Range | Negative delay: 1/2 (Memory Depth/Sample Rate) Positive delay: 1 s to 500 s |
| Timebase Mode | YT, XY, Roll |
| Number of X-Ys | 1 |
| Waveform Capture Rate ^[2] | 30,000 wfms/s (dots display) |
| Zero Offset | ±0.5div*minimum time base scale |

Vertical

| | |
|------------------|--|
| Bandwidth (-3dB) | MSO1104Z/1104Z-S and DS1104Z Plus/1104Z-S Plus: DC to 100 MHz MSO1074Z/1074Z-S and DS1074Z Plus/1074Z-S Plus: DC to 70 MHz DS1054Z: DC to 50 MHz |
|------------------|--|

| | |
|---|--|
| Single-shot Bandwidth | MSO1104Z/1104Z-S and DS1104Z Plus/1104Z-S Plus: DC to 100 MHz MSO1074Z/1074Z-S and DS1074Z Plus/1074Z-S Plus: DC to 70 MHz DS1054Z: DC to 50 MHz |
| Vertical Resolution | Analog channel: 8 bits Digital channel: 1 bit |
| Vertical Scale (Probe ratio is 1X) | 1 mV/div to 10 V/div |
| Offset Range (Probe ratio is 1X) | 1 mV/div to 499 mV/div: ± 2 V 500 mV/div to 10 V/div: ± 100 V |
| Bandwidth Limit ^[1] | 20 MHz |
| Low Frequency Response (AC coupling, -3dB) | ≤ 5 Hz (on BNC) |
| Calculated Rise Time ^[1] | MSO1104Z/1104Z-S and DS1104Z Plus/1104Z-S Plus: 3.5 ns MSO1074Z/1074Z-S and DS1074Z Plus/1074Z-S Plus: 5 ns DS1054Z: 7 ns |
| DC Gain Accuracy | <10 mV: $\pm 4\%$ full scale ≥ 10 mV: $\pm 3\%$ full scale |
| DC Offset Accuracy | ± 0.1 div ± 2 mV $\pm 1\%$ offset |
| Channel to Channel Isolation | DC to maximum bandwidth: >40 dB |

Vertical (Digital Channel)(Applicable to MSO1000Z and DS1000Z Plus with MSO Upgrade Option)

| | |
|-----------------------|--|
| Threshold | Adjustable threshold of 8 channels per group |
| Threshold Selection | TTL (1.4 V) |
| | 5.0 V CMOS (+2.5 V), 3.3 V CMOS (+1.65 V) |
| | 2.5 V CMOS (+1.25 V), 1.8 V CMOS (+0.9 V) |
| | ECL (-1.3 V) |
| | PECL (+3.7 V) |
| | LVDS (+1.2 V) |
| | 0 V |
| | User |
| Threshold Range | ± 15.0 V, in 10 mV step |
| Threshold Accuracy | $\pm (100$ mV + 3% of threshold setting) |
| Dynamic Range | ± 10.0 V + threshold |
| Minimum Voltage Swing | 500 mVpp |
| Vertical Resolution | 1 bit |

Trigger

| | |
|---|--|
| Trigger Level Range | ± 5 div from the center of the screen |
| Trigger Mode | Auto, Normal, Single |
| Holdoff Range | 16 ns to 10 s |
| High Frequency Rejection ^[1] | 75 kHz |
| Low Frequency Rejection ^[1] | 75 kHz |
| Trigger Sensitivity ^[1] | 1.0 div (below 5 mV or noise rejection is enabled) 0.3 div (above 5 mV and noise rejection is disabled) |
| Edge Trigger | |
| Edge Type | Rising, Falling, Rising/Falling |
| Pulse Trigger | |
| Pulse Condition | Positive Pulse Width (greater than, lower than, within specified interval) Negative Pulse Width (greater than, lower than, within specified interval) |
| Pulse Width | 8 ns to 10 s |
| Runt Trigger (Optional) | |
| Pulse Width Condition | None, >, <, <> |
| Polarity | Positive, Negative |
| Pulse Width Range | 8 ns to 10 s |
| Window Trigger (Optional) | |
| Windows Type | Rising, Falling, Rising/Falling |

| | |
|--------------------------------------|--|
| Trigger Position | Enter, Exit, Time |
| Windows Time | 8 ns to 10 s |
| Nth Edge Trigger (Optional) | |
| Edge Type | Rising, Falling |
| Idle Time | 16 ns to 10 s |
| Edge Number | 1 to 65535 |
| Slope Trigger | |
| Slope Condition | Positive Slope (greater than, lower than, within specified interval) Negative Slope (greater than, lower than, within specified interval) |
| Time Setting | 8 ns to 10 s |
| Video Trigger | |
| Signal Standard | NTSC, PAL/SECAM, 480P, 576P |
| Pattern Trigger | |
| Pattern Setting | H, L, X, Rising, Falling |
| Delay Trigger (Optional) | |
| Edge Type | Rising, Falling |
| Delay Type | >, <, <>, >< |
| Delay Time | 8 ns to 10 s |
| TimeOut Trigger (Optional) | |
| Edge Type | Rising, Falling, Rising/Falling |
| TimeOut Value | 16 ns to 10 s |
| Duration Trigger | |
| Pattern | H, L, X |
| Trigger Condition | >, <, <> |
| Duration Time | 8 ns to 10 s |
| Setup/Hold Trigger (Optional) | |
| Edge Type | Rising, Falling |
| Data Pattern | H, L, X |
| Setup Time | 8 ns to 1 s |
| Hold Time | 8 ns to 1 s |
| RS232/UART Trigger (Optional) | |
| Polarity | Normal, Invert |
| Trigger Condition | Start, Error, Check Error, Data |
| Baud Rate | 2400 bps, 4800 bps, 9600 bps, 19200 bps, 38400 bps, 57600 bps, 115200 bps, 230400 bps, 460800 bps, 921600 bps, 1 Mbps and User |
| Data Bits | 5 bits, 6 bits, 7 bits, 8 bits |
| I2C Trigger (Optional) | |
| Trigger Condition | Start, Restart, Stop, Missing Ack, Address, Data, A&D |
| Address Bits | 7 bits, 8 bits, 10 bits |
| Address Range | 0 to 127, 0 to 255, 0 to 1023 |
| Byte Length | 1 to 5 |
| SPI Trigger (Optional) | |
| Trigger Condition | Timeout, CS |
| Timeout Value | 16 ns to 10 s |
| Data Bits | 4 bit to 32 bit |
| Data Line Setting | H, L, X |

Measure

| | | |
|------------------------|--|---|
| Cursor | Manual mode | Voltage deviation between cursors (ΔV) Time deviation between cursors (ΔT) Reciprocal of ΔT (Hz) ($1/\Delta T$) |
| | Track mode | Voltage and time values of the waveform point |
| | Auto mode | Allow to display cursors during auto measurement |
| Auto Measurement | Analog channel: Period, Frequency, Rise Time, Fall Time, Positive Pulse Width, Negative Pulse Width, Positive Duty Cycle, Negative Duty Cycle, t_{Vmax} , t_{Vmin} , Positive Rate, Negative Rate, Delay 1→2 f , Delay 1→2 T , Phase 1→2 f , Phase 1→2 T , Maximum, Minimum, Peak-Peak Value, Top Value, Bottom Value, Amplitude, Upper Value, Middle Value, Lower Value, Average, Vrms, Overshoot, Pre-shoot, Area, Period Area, Period Vrms, Variance Digital channel: Period, Frequency, Positive Pulse Width, Negative Pulse Width, Positive Duty Cycle, Negative Duty Cycle, Delay 1→2 f , Delay 1→2 T , Phase 1→2 f , Phase 1→2 T | |
| Number of Measurements | Display 5 measurements at the same time | |
| Measurement Range | Screen or cursor | |
| Measurement Statistic | Average, Max, Min, Standard Deviation, Number of Measurements | |
| Counter | Hardware 6 bits counter (channels are selectable) | |

Math Operation

| | |
|------------------------------|--|
| Waveform Operation | A+B, A-B, A×B, A/B, FFT, A&&B, A B, A^B, !A, Intg, Diff, Sqrt, Lg, Ln, Exp, Abs, Filter |
| FFT Window | Rectangle, Hanning, Blackman, Hamming, Flat Top, Triangle |
| FFT Mode | Trace, Memory |
| FFT Display | Half, Full |
| FFT Vertical Scale | dB/dBm, Vrms |
| Filter | Low Pass Filter, High Pass Filter, Band Pass Filter, Band Stop Filter |
| Number of Buses for Decoding | 2 |
| Decoding Type | Parallel (standard), RS232/UART (optional), I2C (optional), SPI (optional) |

Display

| | |
|--------------------|---|
| Display Type | 7.0 inch TFT LCD display |
| Display Resolution | 800 horizontal × RGB × 480 vertical pixel |
| Display Color | 16 million color (24 bit true color) |
| Persistence Time | Min, 100 ms, 200 ms, 500 ms, 1 s, 5 s, 10 s, Infinite |
| Display Type | Dots, Vectors |

I/O

| | |
|----------------|--|
| Standard Ports | USB Host, USB Device, LAN, Aux Output (TrigOut/PassFail) |
|----------------|--|

Signal Source (Applicable to Digital Oscilloscopes with Source Channels)

| | |
|---------------------|---|
| Number of Channels | 2 |
| Sample Rate | 200 MSa/s |
| Vertical Resolution | 14 bits |
| Max. Frequency | 25 MHz |
| Standard Waveform | Sine, Square, Pulse, Ramp, Noise, DC |
| Arbitrary Waveform | Since, Exp.Rise, EXP.Fall, ECG, Gauss, Lorentz, Haversine |

| | | |
|----------------------|---------------------------|---|
| Sine | Frequency Range | 0.1 Hz to 25 MHz |
| | Flatness | ±0.5 dB (relative to 1 kHz) |
| | Harmonic Distortion | -40 dBc |
| | Stray (Non-harmonic) | -40 dBc |
| | Total Harmonic Distortion | 1% |
| | S/N Ratio | 40 dB |
| Square /Pulse | Frequency Range | Square: 0.1 Hz to 15 MHz Pulse: 0.1 Hz to 1 MHz |
| | Rise/Fall time | <15 ns |
| | Overshoot | <5% |
| | Duty Cycle | Square: always be 50% Pulse: 10% to 90% adjustable |
| | Duty Cycle Resolution | 1% or 10 ns (the larger of the two) |
| | Min. Pulse Width | 20 ns |
| | Pulse Width Resolution | 10 ns or 5 bits (the larger of the two) |
| | Jitter | 500 ps |
| Ramp | Frequency Range | 0.1 Hz to 100 kHz |
| | Linearity | 1% |
| | Symmetry | 0 to 100% |
| Noise ^[1] | Bandwidth | 25 MHz |
| Built-in Waveforms | Frequency Range | 0.1 Hz to 1 MHz |
| Arbitrary Waveforms | Frequency Range | 0.1 Hz to 10 MHz |
| | Waveform Length | 2 to 16k pts |
| Frequency | Accuracy | 100 ppm (lower than 10 kHz) 50 ppm (greater than 10 kHz) |
| | Resolution | 0.1 Hz or 4 bit, the larger of the two |
| Amplitude | Output Range | 20 mVpp to 5 Vpp, High-resistance 10 mVpp to 2.5 Vpp, 50 Ω |
| | Resolution | 100 μV or 3 bit, select the greater one |
| | Accuracy | 2% (1 kHz) |
| DC Offset | Range | ±2.5 V, HighZ ±1.25 V, 50 Ω |
| | Resolution | 100 μV or 3 bit, the larger of the two |
| | Accuracy | 2% (1 kHz) |
| Modulation | AM, FM | |

General Specifications

| | |
|-------------------------------|---|
| Probe Compensation Output | |
| Output Voltage ^[1] | About 3 V, peak-peak |
| Frequency ^[1] | 1 kHz |
| Power | |
| Power Voltage | 100 V to 240 V, 45 Hz to 440 Hz |
| Power | Maximum 50 W |
| Fuse | 2 A, T degree, 250 V |
| Environment | |
| Temperature Range | Operating: 0°C to +50°C |
| | Non-operating: -40°C to +70°C |
| Cooling Method | Fan cooling |
| Humidity Range | 0°C to +30°C : ≤95% relative humidity |
| | +35°C to +40°C : ≤75% relative humidity |
| | +40°C to +50°C : ≤45% relative humidity |

| | | |
|---|---|-----------------|
| Altitude | Operating: under 3,000 meters | |
| | Non-operating: under 15,000 meters | |
| Mechanical | | |
| Dimensions ^[3] | Width × Height × Depth = 313.1 mm × 160.8 mm × 122.4 mm | |
| Weight ^[4] | Without package | 3.2 kg ± 0.2 kg |
| | With package | 3.8 kg ± 0.5 kg |
| Calibration Interval | | |
| The recommended calibration interval is one year. | | |
| Regulation Standards | | |
| Electromagnetic Compatibility | 2004/108/EC Execution standard EN 61326-1:2006 EN 61326-2-1:2006 | |
| Safety | UL 61010-1:2004; CAN/CSA-C22.2 NO. 61010-1-2004; EN 61010-1:2001; IEC 61010-1:2001 | |

Note^[1]: Typical.

Note^[2]: Maximum value. 50 ns, single-channel mode, dots display, auto memory depth.

Note^[3]: Supporting legs and handle folded, knob height included.

Note^[4]: Standard configuration.


► Ordering Information

| | Description | Order Number |
|---------------------------------|--|--------------------------|
| Models | DS1104Z Plus (100 MHz, 4 analog channels, MSO ready) | DS1104Z Plus |
| | DS1104Z-S Plus (100 MHz, 4 analog channels, 2-channel 25 MHz signal source, MSO ready) | DS1104Z-S Plus |
| | DS1074Z Plus (70 MHz, 4 analog channels, MSO ready) | DS1074Z Plus |
| | DS1074Z-S Plus (70 MHz, 4 analog channels, 2-channel 25 MHz signal source, MSO ready) | DS1074Z-S Plus |
| | MSO1104Z (100 MHz, 4 analog channels, 16 digital channels) | MSO1104Z |
| | MSO1104Z-S (100 MHz, 4 analog channels, 16 digital channels, 2-channel 25 MHz signal source) | MSO1104Z-S |
| | MSO1074Z (70 MHz, 4 analog channels, 16 digital channels) | MSO1074Z |
| | MSO1074Z-S (70 MHz, 4 analog channels, 16 digital channels, 2-channel 25 MHz signal source) | MSO1074Z-S |
| | DS1054Z (50 MHz, 4 analog channels) | DS1054Z |
| Standard Accessories | Power Cord conforming to the standard of the country | - |
| | USB Cable | CB-USBA-USBB-FF-150 |
| | 4 Passive Probes (150 MHz) | RP2200 |
| | 1 Logic Analyzer Probe (only for MSO1000Z) | RPL1116 |
| | Quick Guide (Hard Copy) | - |
| MSO Upgrade Option | MSO upgrade package for DS1000Z Plus only, including logic analyzer probe (RPL1116) and model label | MSO1000Z Upgrade Package |
| Optional Accessory | Rack Mount Kit | RM-DS1000Z |
| Memory Depth Option | Analog channel: 24 Mpts (single channel)/12 Mpts (dual-channel)/6 Mpts (three/four-channel) Digital channel: 24 Mpts (8-channel)/12 Mpts (16-channel) | MEM-DS1000Z |
| Waveform Record Option | This option provides the waveform recording and playback function. | REC-DS1000Z |
| Advanced Trigger Option | RS232/UART trigger, I2C trigger, SPI trigger, Runt trigger, Window trigger, Nth edge trigger, delay trigger, timeout trigger, Setup/Hold trigger | AT-DS1000Z |
| Serial Protocol Analysis Option | RS232/UART, I2C and SPI trigger and decoding functions | SA-DS1000Z |

[Click on the product codes above to be taken directly to the Rigol Website.](#)


► Standard Software

Ultra Sigma

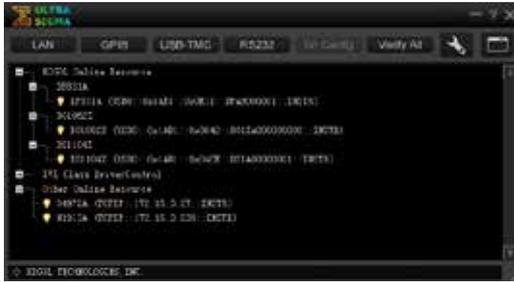

- **RIGOL** general PC software platform
- Multi-instrument and multi-interface resource management
- With SCPI remote command tool

Ultra Scope

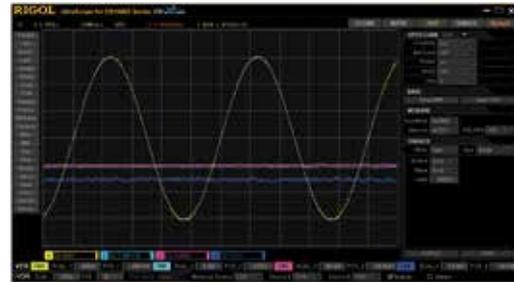

- Real-time monitoring of waveform and status; supports multi-instrument and multi-window display
- With virtual panel feature
- Supports multi-interface remote control

Warranty

Three –year warranty, excluding probes and accessories.

