



- Universal AC input / Full range (up to 305VAC)
- · Built-in active PFC function
- High efficiency up to 93%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- · Class 2 power unit
- Type HL LED Driver for use in Class $\, {
 m I} \,$, Division 2 hazardous location luminaires
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 7 years warranty (Note.10)





















HLG-100H-20 A Blank : IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.


D (option, safety pending): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


MODEL		HLG-100H-20	HLG-100H-24	HLG-100H-30	HLG-100H-36	HLG-100H-42	HLG-100H-48	HLG-100H-54				
	DC VOLTAGE	20V	24V	30V	36V	42V	48V	54V				
	CONSTANT CURRENT REGION Note.4	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	4.8A	4A	3.2A	2.65A	2.28A	2A	1.77A				
	RATED POWER	96W	96W	96W	95.4W	95.76W	96W	95.58W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p				
	VOLTAGE ADJ. RANGE Note.6	17 ~ 22V	17 ~ 22V									
		Can be adjusted by internal potentiometer A type only										
OUTPUT	CURRENT ADJ. RANGE	3 ~ 4.8A	2.5 ~ 4A	2 ~ 3.2A	1.65 ~ 2.65A	1.4 ~ 2.28A	1.25 ~ 2A	1.1 ~ 1.77A				
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	SETUP, RISE TIME Note.8	1200ms,50ms/115	5VAC 500ms,50	ms/230VAC at full I	oad; B type 1200m	ns,200ms/115VAC	500ms,200ms/23	30VAC at 95% load				
	HOLD UP TIME (Typ.)	16ms at full load	230VAC /115VAC		, ,,	,	,					
		90 ~ 305VAC	127 ~ 431VDC									
	FREQUENCY RANGE	90 ~ 305VAC 127 ~ 431VDC 47 ~ 63Hz										
	POWER FACTOR (Typ.)		PF>0 95/230VAC	PF>0 93/277VAC	at full load (Please	refer to "Power Fac	ctor Characteristic"	curve)				
	TOTAL HARMONIC DISTORTION	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve) THD< 20% when output loading≧60% at 115VAC/230VAC input and output loading≧75% at 277VAC input										
INPUT	EFFICIENCY (Typ.)	93%	93%	93%	93%	93%	93%	93%				
	AC CURRENT (Typ.)	1.2A / 115VAC	0.55A / 230VAC	3070	3070	3070						
	INRUSH CURRENT (Typ.)	1.2A / 115VAC 0.55A / 230VAC 0.5A / 277VAC COLD START 60A(twidth=415µs measured at 50% lpeak) at 230VAC										
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	4 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC										
	LEAKAGE CURRENT	<0.75mA / 277VA	C									
		95 ~ 106%										
	OVER CURRENT	Protection type : Constant current limiting, recovers automatically after fault condition is removed										
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed										
PROTECTION		23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V				
	OVER VOLTAGE	Protection type : S	Shut down o/p volta	ige with auto-recov	ery or re-power on	to recovery						
	OVER TEMPERATURE	Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery Shut down o/p voltage, recovers automatically after temperature goes down										
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")										
	WORKING HUMIDITY	20 ~ 95% RH non-condensing										
ENVIRONMENT	STORAGE TEMP., HUMIDITY	•										
LITTINONIILITI	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)										
	VIBRATION	. ,										
	SAFETY STANDARDS Note.7	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750(type"HL"), CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved										
	WITHSTAND VOLTAGE	design refer to UL60950-1, TUV EN60950-1 I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC										
SAFETY & EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH										
	EMC EMISSION	1/F-0/F, 1/F-FG, 0/F-FG. 100M 011118 / 300VDC / 23 C/ 70% KH Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧60% load); EN61000-3-3										
	EMC IMMUNITY											
	MTBF	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A 192.2Khrs min. MIL-HDBK-217F (25°C)										
OTHERS	DIMENSION	220*68*38.8mm (L*W*H)										
OTHERS		1.12Kg; 12pcs/14										
	PACKING			AC input	ad and OF°O -4	biont ton						
NOTE	2. Ripple & noise are measure	lly mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ed at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation.										

- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. Derating may be needed under low input voltages. Please check the static characteristics for more details.
- 6. A type only.
 7. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.
- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
- The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the
 complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains



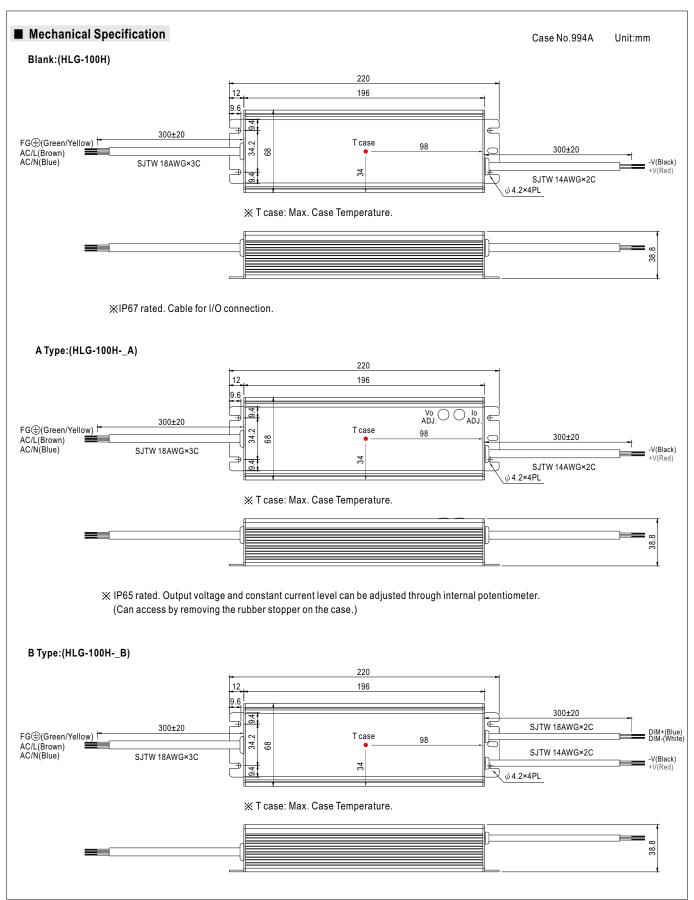




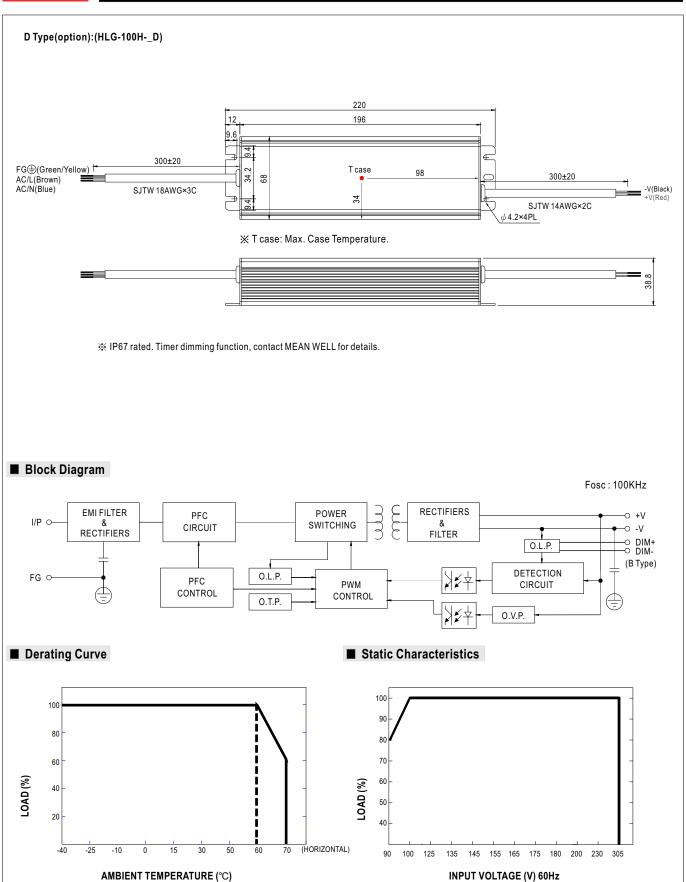




■ Power Factor Characteristic

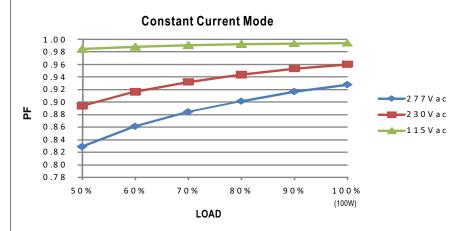

■ EFFICIENCY vs LOAD (48V Model)

HLG-100H series possess superior working efficiency that up to 93% can be reached in field applications.

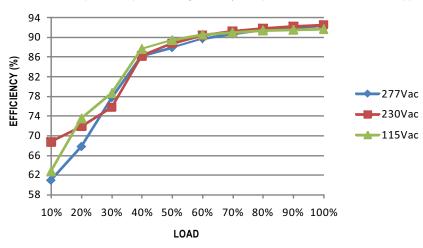


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

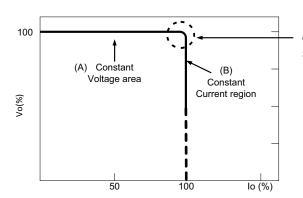


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION(for B-type only)

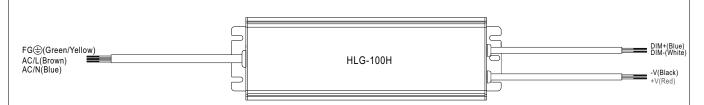

- ** Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10ΚΩ	20ΚΩ	30ΚΩ	40ΚΩ	50ΚΩ	60ΚΩ	70ΚΩ	80ΚΩ	90ΚΩ	100ΚΩ	OPEN
value	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

* 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

* 10V PWM signal for output current adjustment (Typical): Frequency range:100HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- $\fint \fint \fin$

Dimming connection diagram for turning the lighting fixture $\mbox{ON/OFF}$:

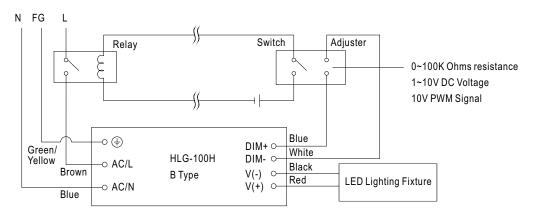

Using a switch and relay can turn ON/OFF the lighting fixture.


- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



■ WATERPROOF CONNECTION


 $\bigcirc \ \ Waterproof connector$

 $Waterproof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-100H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$




Size	Pin Configuration (Female)					
M12	00	000				
IVITZ	4-PIN	5-PIN				
	5A/PIN	5A/PIN				
Order No.	M12-04	M12-05				
Suitable Current	10A max.	10A max.				

Size	Pin Configuration (Female)					
M15	$\bigcirc \circ$					
IVITO	2-PIN					
	12A/PIN					
Order No.	M15-02					
Suitable Current	12A max.					



O Cable Joiner

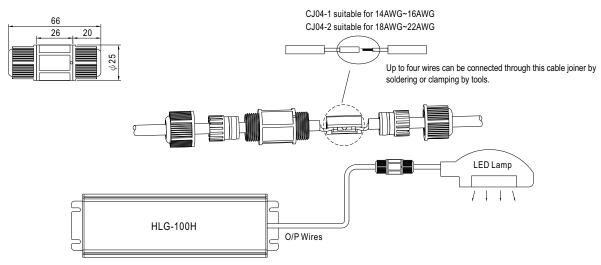

※CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No.: CJ04-1, CJ04-2.

