


120W, AC-DC converter

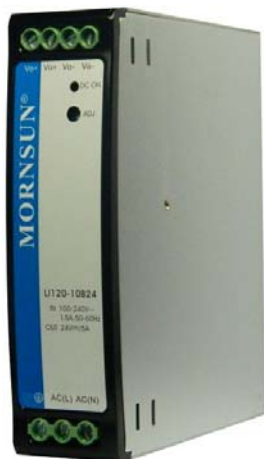

FEATURES

- Universal input range:85~264VAC/120~370VDC
- AC and DC all in one (input from the same terminal)
- Low standby power consumption, high efficiency, 3000VAC safe isolation
- low ripple and noise
- Protection of input under-voltage, output short circuit, output over-current, output over-voltage over-temperature Protection, and Remote control
- Perfect EMC performance, and EFT, surge meet level 4
- Meet IEC61000, UL60950and IEC60950 standards

LI120— 120W converter offered by Mornsun. It features Cost-effective, standard rail mounting, energy efficient. It offers stability and high noise immunity for industrial control equipment, machinery and other harsh environments of industrial equipment. The converter is small, light weight, compact structure, standard rail (35mm) Installation and save a lot of space for customers.

Selection Guide

Certification	Model	Output Power	Nominal Output Voltage and Current(Vo/Io)	Efficiency (230VAC, %/Typ.)	Max. Capacitive Load(μF)
UL/CE (Pending)	LI120-10B24	120W	24V/5A	92	4700

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input frequency			47	--	63	Hz
Input current	115VAC		--	--	1.5	A
	230VAC		--	--	0.75	
Inrush current	115VAC		--	35	--	A
	230VAC		--	70	--	
Power Factor	115VAC		--	0.98	--	--
	230VAC		--	0.96	--	
Input under-voltage protection	Start-up Voltage	AC input	76	--	83	VAC
	Shutdown Voltage	AC input	67	--	75	

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			--	--	±1	%
Linear Regulation	Full load		--	--	±0.5	
Load Regulation			--	--	±1	
Output Ripple & Noise*	20MHz bandwidth (peak-peak value)		--	--	100	mV
Temperature Drift Coefficient			--	±0.03	--	%/°C
Stand-by Power Consumption			--	--	0.75	W
Short Circuit Protection			Continuous, self-recovery			
Over-current Protection			110-150% Io, start protecting after 3 seconds, and auto recovery			
Over-voltage Protection			Overvoltage Restart			
Over-temperature Protection			Over-temperature shutdown , and auto recovery			
Min. Load			0	--	--	%
Start-up Time			--	--	1500	ms

Hold-up Time	115VAC	--	25	--	
	230VAC	--	25	--	

Note: * Rely test method is adopted test the ripple and noise, please see *AC-DC Converter Application Notes* for specific operation methods.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output	3000	--	--	VAC
	Input- 	1500	--	--	
	Output- 	500	--	--	
Operating Temperature	Test time: 1min	-25	--	+70	°C
Storage Temperature		-25	--	+85	
Storage Humidity		--	--	95	
Switching Frequency		--	100	--	kHz
Power Derating	+55°C to +70°C	2.5	--	--	%/°C
Safety Standard	IEC60950/EN60950/UL60950				
Safety-regulated Certification	EN60950/UL60950 Pending				
Safety Class	CLASS I				
Hot Plug	Unavailable				
MTBF	MIL-HDBK-217F@25°C > 300,000 h				



Physical Specifications

Casing Material	heat-resistant plastic (UL94-V0) and metal
Package Dimensions	35.00*125.00*112.70 mm (W*H*D)
Weight	560±20 g
Cooling method	Natural cooling

EMC Specifications



EMI	Conducted Disturbance	CISPR22/EN55022, CLASS B			
	Radiated Emission	CISPR22/EN55022, CLASS B			
EMS	Electrostatic Discharge	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	Perf. Criteria B	
	Radiation Immunity	IEC/EN61000-4-3	10V/m	perf. Criteria A	
	EFT	IEC/EN61000-4-4	±4KV	perf. Criteria B	
	Surge Immunity	IEC/EN61000-4-5	±2KV/±4KV	perf. Criteria B	
	Conducted Disturbance immunity	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A	
	Immunity for Power frequency magnetic field	IEC/EN61000-4-8	10A/m	perf. Criteria A	
	Immunities of voltage dip, drop and short interruption	IEC/EN61000-4-11	0%-70%	perf. Criteria B	

Product Characteristic Curve

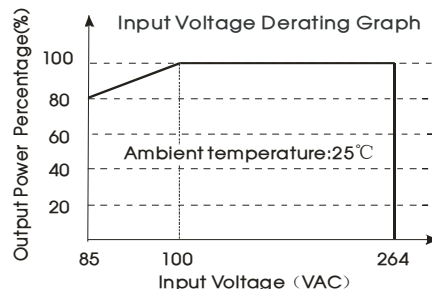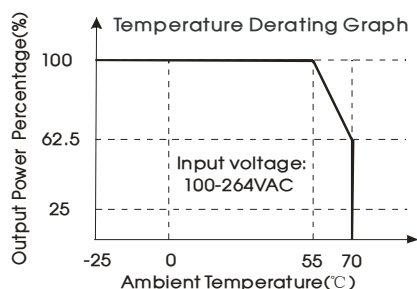

Note: Input voltage should be derated based on temperature derating when it is 85-100VAC.

Note: When input DC, VDC=1.414*VAC-20.

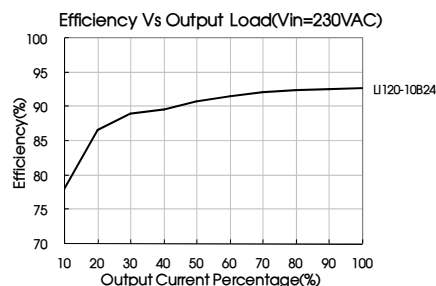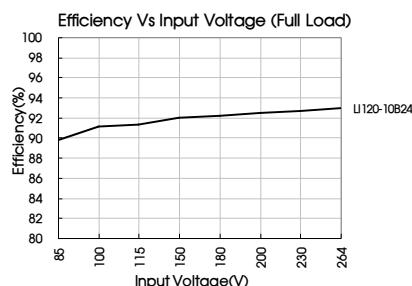

Design Reference

1. Typical application circuit

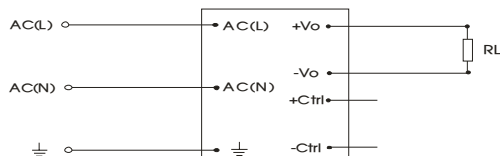


Fig. 1: Typical application circuit


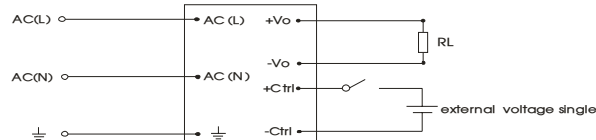


Fig. 2: Remote control Applications circuit

*Note: external voltage single range 4.5 ~ 12.5VDC realize the power off, the single disappears and recovery

2. For more information Please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

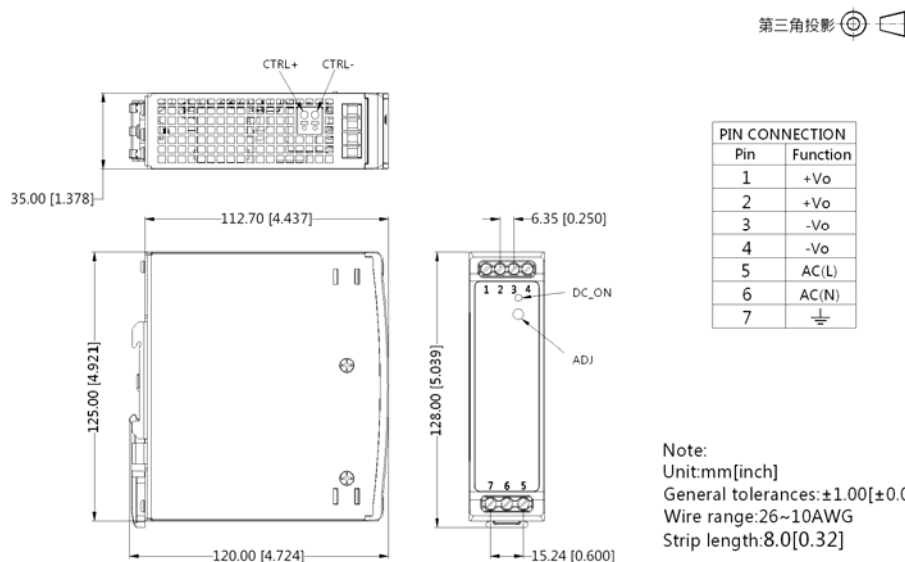

Note:

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58220028;
2. Unless otherwise specified, data in this datasheet should be tested under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% when inputting nominal voltage and outputting rated load;
3. All index testing methods in this datasheet are based on our Company's corporate standards;
4. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
5. We can provide product customization service;
6. The product specification may be changed at any time without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn