



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

1N5817  
THRU  
1N5819

**TECHNICAL SPECIFICATIONS OF SCHOTTKY BARRIER RECTIFIER**

VOLTAGE RANGE - 20 to 40 Volts

CURRENT - 1.0 Ampere

**FEATURES**

- \* Low switching noise
- \* Low forward voltage drop
- \* High current capability
- \* High switching capability
- \* High reliability
- \* High surge capability

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: MIL-STD-202E, Method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.33 gram

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



DO-41

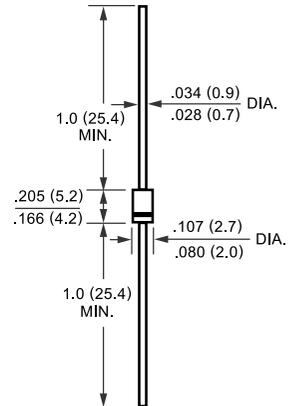

Dimensions in inches and (millimeters)

|  | SYMBOL                            | 1N5817       | 1N5818 | 1N5819 | UNITS |
|--|-----------------------------------|--------------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage   | V <sub>RRM</sub>                  | 20           | 30     | 40     | Volts |
| Maximum RMS Voltage  | V <sub>RMS</sub>                  | 14           | 21     | 28     | Volts |
| Maximum DC Blocking Voltage  | V <sub>DC</sub>                   | 20           | 30     | 40     | Volts |
| Maximum Average Forward Rectified Current<br>.375*(9.5mm) lead length at T <sub>L</sub> = 90°C       | I <sub>o</sub>                    | 1.0          |        |        | Amps  |
| Peak Forward Surge Current 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>                  | 25           |        |        | Amps  |
| Maximum Instantaneous Forward Voltage at 1.0A DC   | V <sub>F</sub>                    | .45          | .55    | .60    | Volts |
| Maximum Forward Voltage at 3.1A DC   | V <sub>F</sub>                    | .75          | .875   | .90    | Volts |
| Maximum DC Reverse Current at<br>Rated DC Blocking Voltage   | I <sub>R</sub>                    | 1.0          |        |        | mAmps |
|  |                                   | 10           |        |        |       |
| Typical Thermal Resistance (Note1)   | R <sub>θJA</sub>                  | 80           |        |        | °C/W  |
| Typical Junction Capacitance (Note 2)  | C <sub>J</sub>                    | 110          |        |        | pF    |
| Storage and Operating Temperature Range  | T <sub>J</sub> , T <sub>STG</sub> | -65 to + 125 |        |        | °C    |

NOTES : 1. Thermal Resistance (Junction to Ambient): Vertical PC Board Mounting, 0.375\*(9.5mm) Lead Length.  
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

# RATING AND CHARACTERISTIC CURVES (1N5817 THRU 1N5819)

FIG. 1 -- TYPICAL FORWARD CURRENT DERATING CURVE

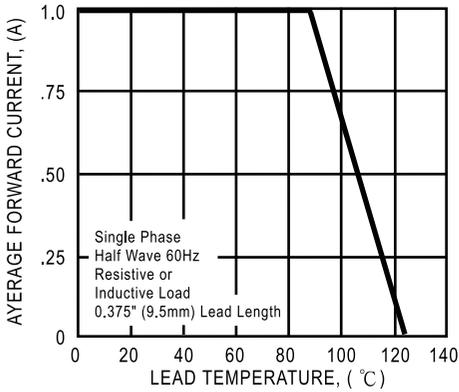


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

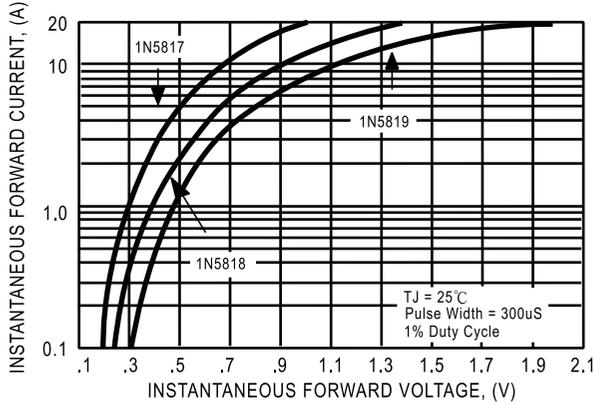


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

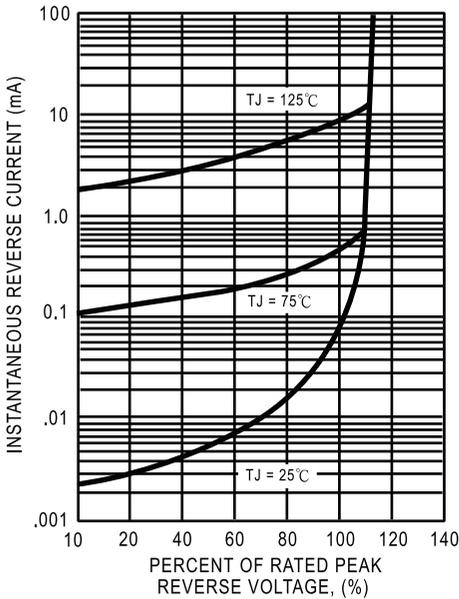


FIG. 4 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

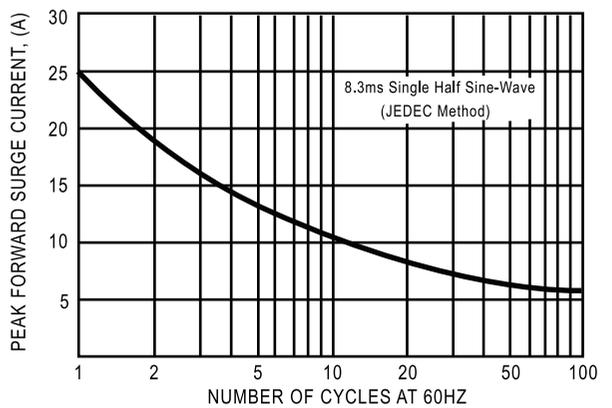


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

