

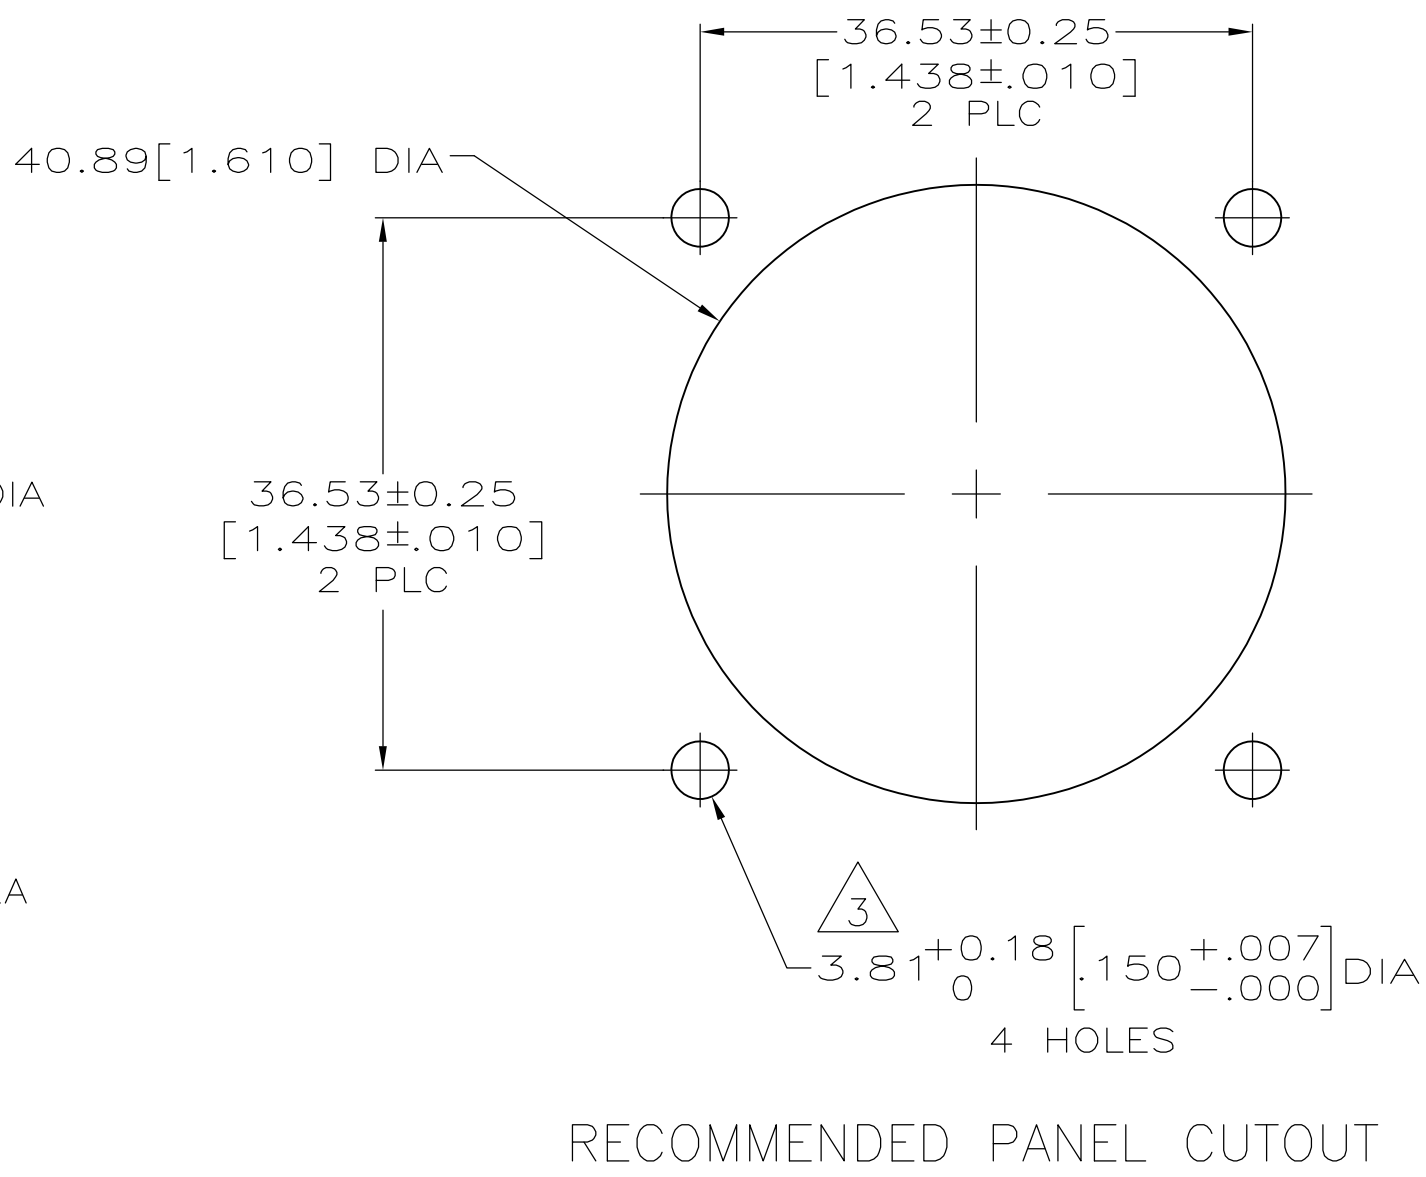
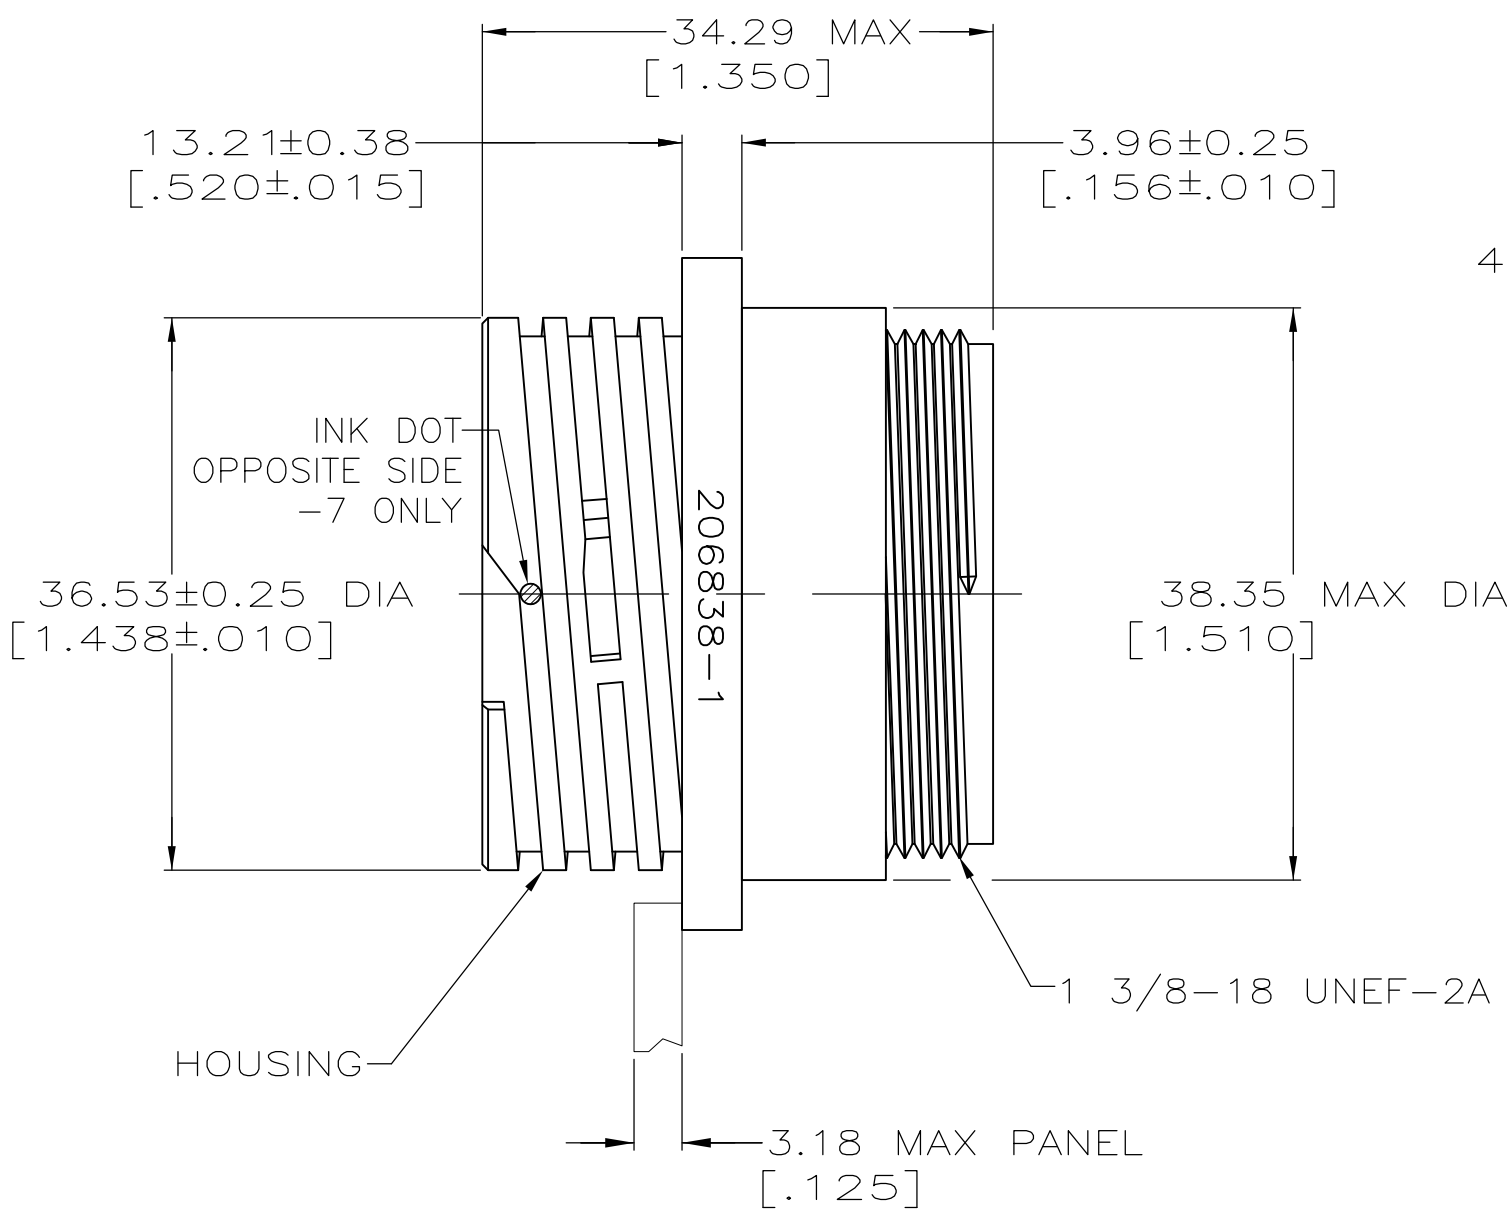
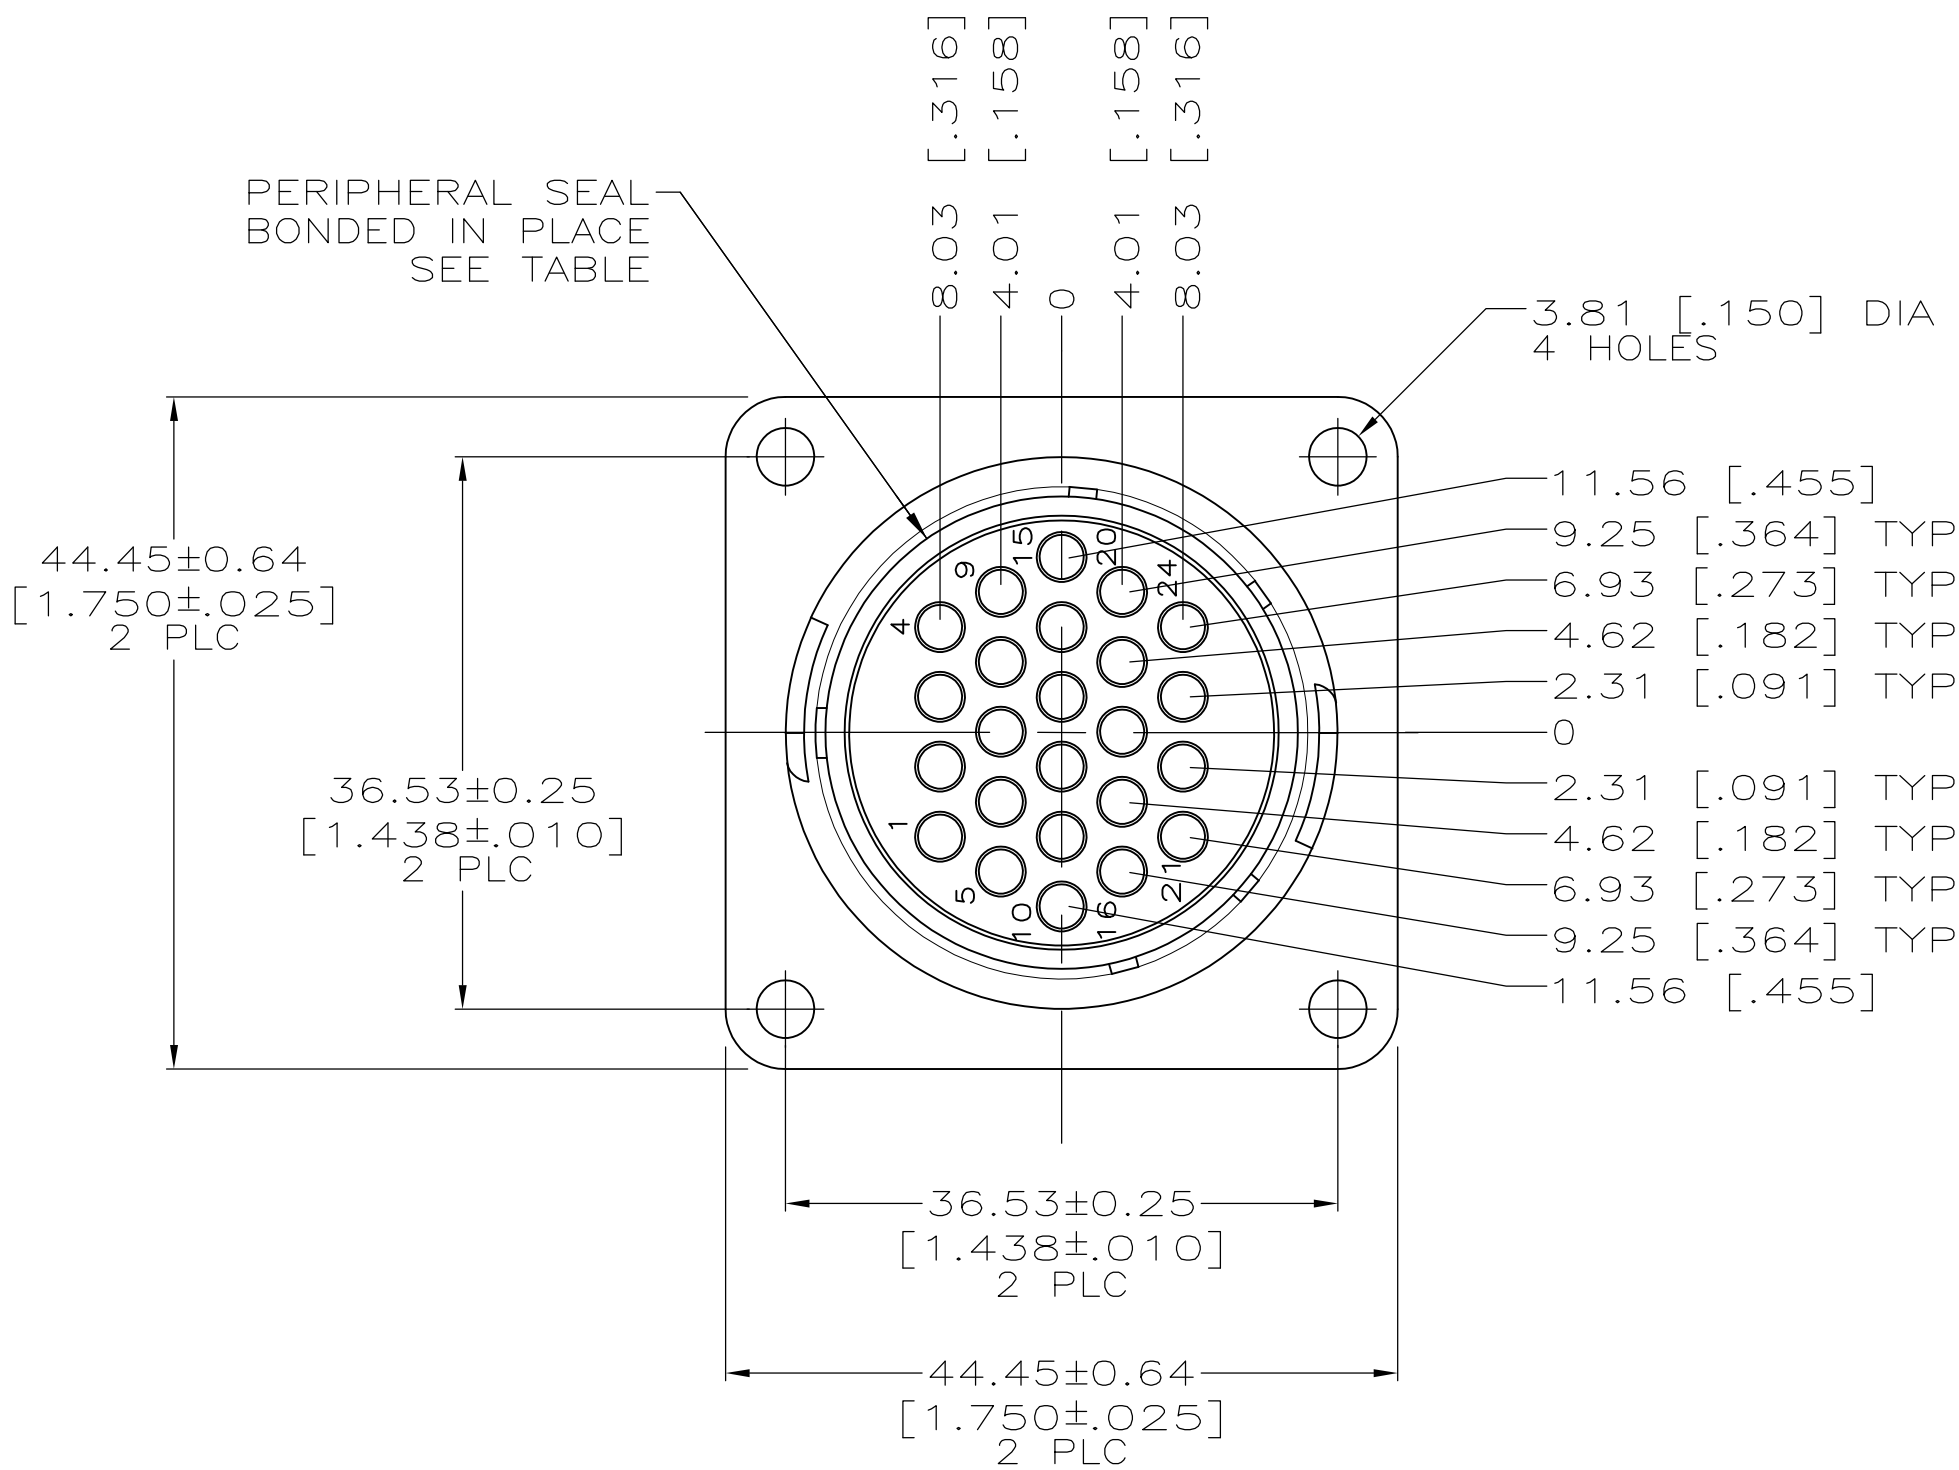


LOC		DIST		REVISIONS					
P	L	L	R	F	T	D	E	W	A
FT	0	L	REVISED	PER	ECO-12-015521	28SEP12	KH	MZ	

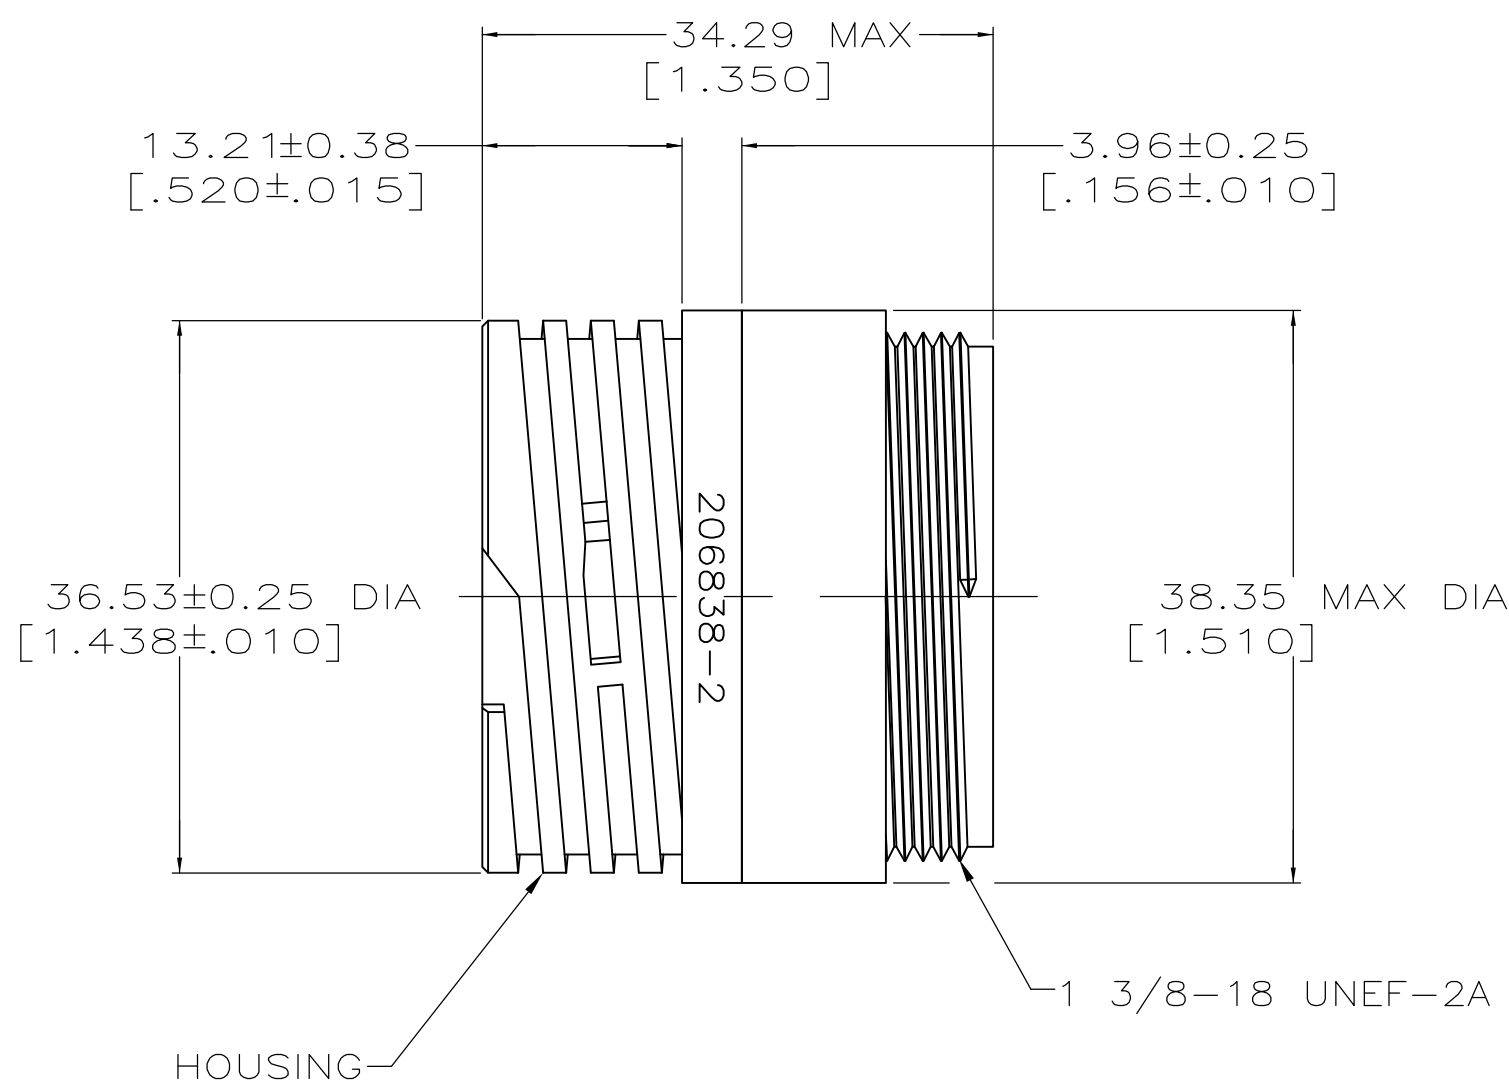


DETAIL A

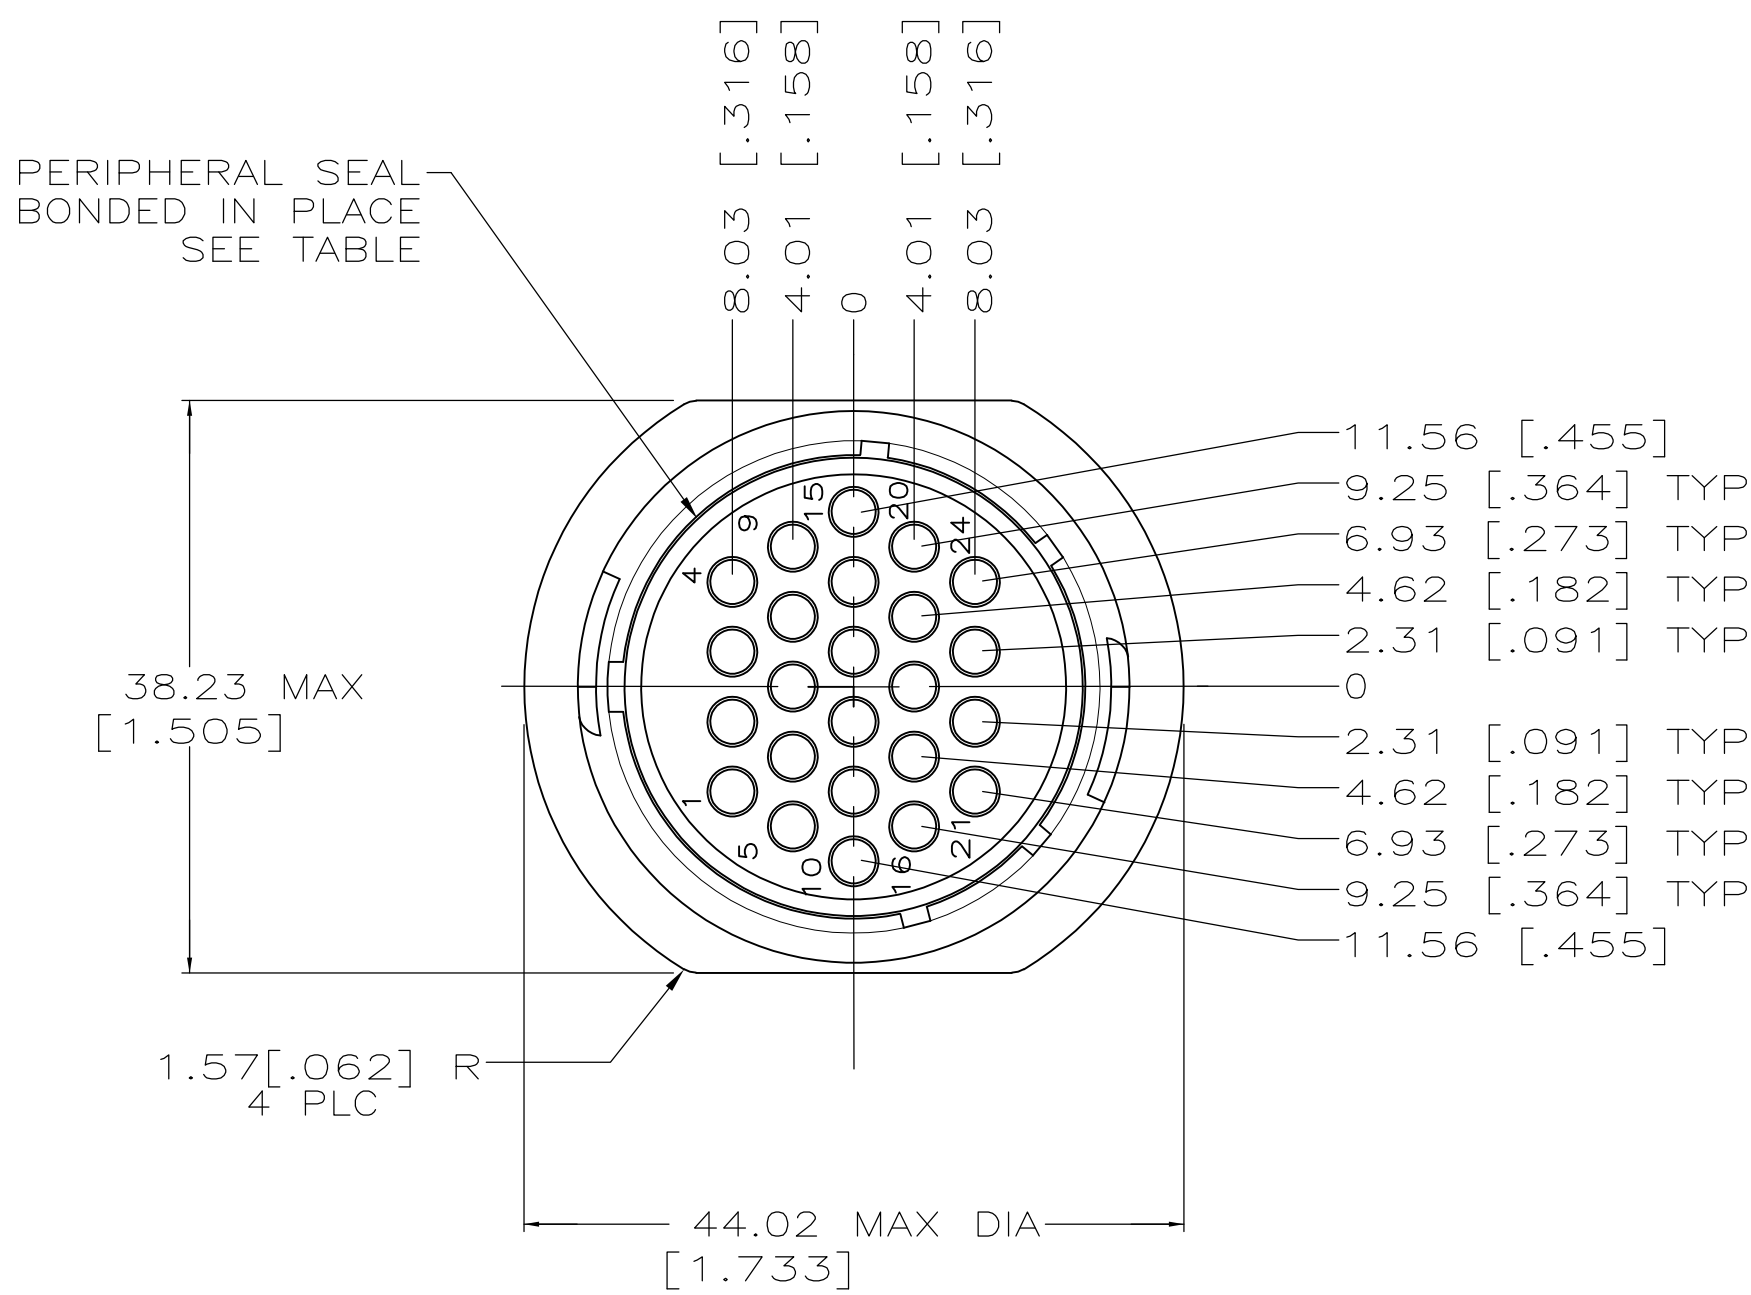

DETAIL B

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 WILL ACCEPT (24) MULTIMATE PIN CONTACTS.
- 3 NO 4 FASTENER RECOMMENDED FOR MOUNTING.
- 4 MAXIMUM INSULATION NOT TO EXCEED .150 DIA.
- 5 WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

5	STANDARD	YES	A	206838-8
	STANDARD	YES	A	206838-7
	SMALL PACK	NO	A	206838-5
	STANDARD	YES	B	206838-4
	STANDARD	YES	A	206838-3
	STANDARD	NO	B	206838-2
	STANDARD	NO	A	206838-1
	PACKAGING	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.GELTZ 10/29/92	 TE Connectivity	
		CHK R.STONE 08/11/93		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME	
		PRODUCT SPEC	RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 23, CPC	
	0 PLC ± -	108-10024	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
	1 PLC ± -	APPLICATION SPEC		
MATERIAL HOUSING: NYLON, BLACK	0.13 [.005]	WEIGHT	SCALE 2:1 SHEET 1 OF 1 REV L	
	1 PLC ± -	CUSTOMER DRAWING		
	4 PLC ± -			
	ANGLES ± -			
	FINISH -			