


Specifications

PartName:

20W/UV/High Power/LED


Package Dimensions(mm)

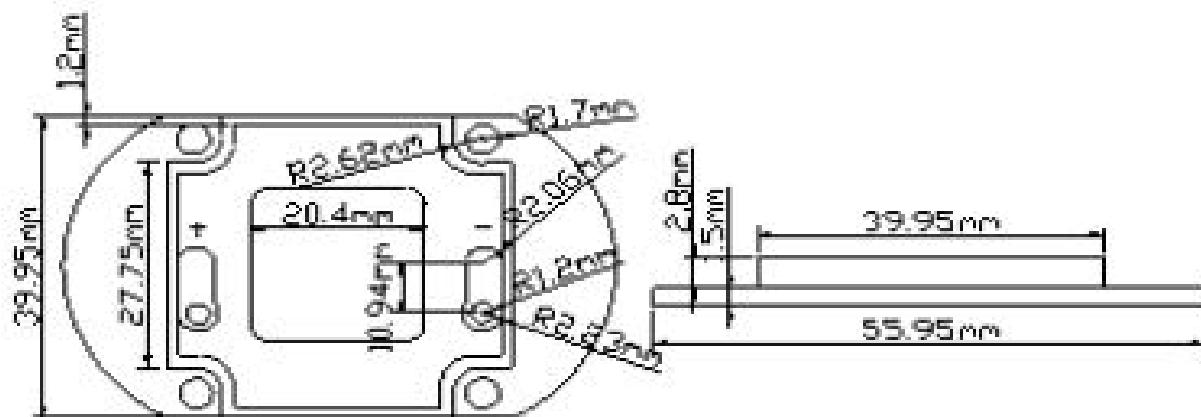

Notes

1. All dimensions are in millimeters (mm).
2. Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

Spatial Distribution

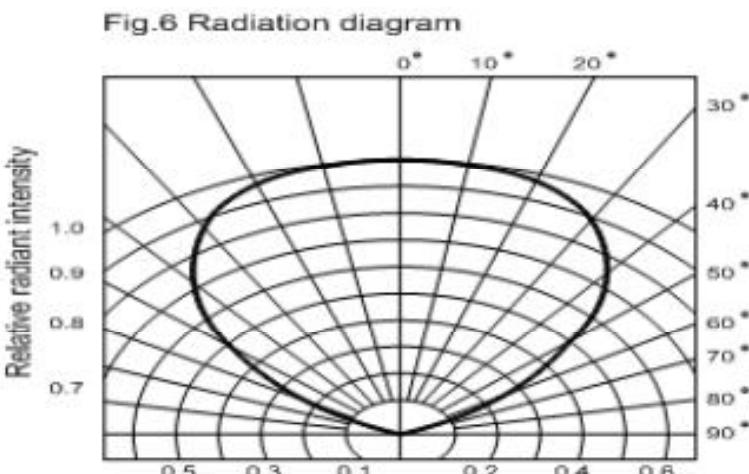

Electrical / Optical Characteristics at TA=25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-------------------|------|------|------|------|----------------|
| Luminous Intensity | Ø | 100 | | 200 | lm | IF=700mA |
| Viewing Angle | 2θ _{1/2} | | 130 | | deg | IF=700mA |
| Dominant Wavelength | Tc | | | | K | IF=700mA |
| Spectral Line Half-Width | Δλ | 400 | | 410 | nm | IF=700mA |
| Forward Voltage | VF | 30 | | 35 | V | IF=700mA |
| Reverse Current | IR | | | 20 | uA | VR=5V |

Absolute Maximum Ratings at TA=25°C

| Parameter | Maximum Rating |
|--|---------------------|
| Power Dissipation | 20W |
| Peak Forward Current (1/10 Duty Cycle, 0. Lms Pulse Wisth) | 700mA |
| Continuous Forward Current | 700mA |
| Reverse Voltage | 5V |
| Operating Temperature Range | -20°C to +60°C |
| Storage Temperature Range | -20°C to +60°C |
| Lead Soldering Temperature [1.6mm(.63")From Body] | 260°C for 5 Seconds |