


RoHS Compliant

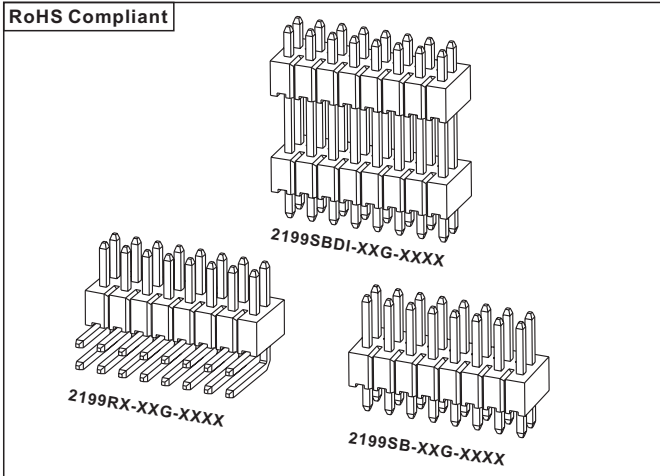

Specifications




1. Current Rating: 1.0A AC/DC.
2. Voltage Rating: 50V AC/DC.
3. Contact Resistance: 20m ohm. max.
4. Insulation Resistance: 1000M ohm. Min.
5. Withstanding Voltage: 500V AC for one minute.
6. Operating Temperature Range: -25°C to +105°C.

Material and Finish



1. Insulator: High Temp Plastic (Nylon 6T UL94V-0).
2. Insulator Height: 1.5/2.0/2.54mm, (Detail Spec, Consult to sales dept).
3. Contact: Copper Alloy.
4. Plating: Gold Plated.

Feature

1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.


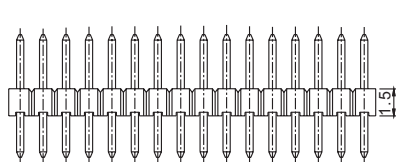
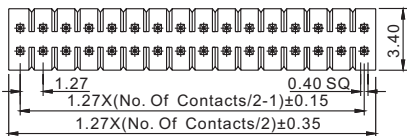


P/N: 2199SB-XXG-301523
A B C


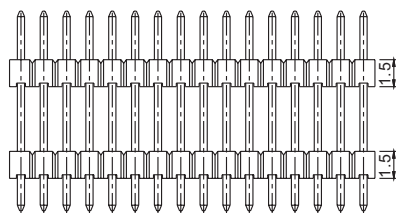


P/N: 2199SBDI-XXG-1110
D

A/B/C/D Dimension To Be Advised By Value Customers

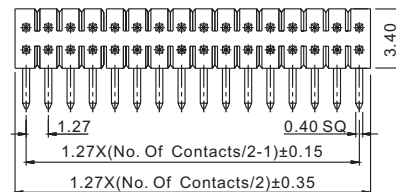

P/N: 2199R0-XXG-301523
A B C

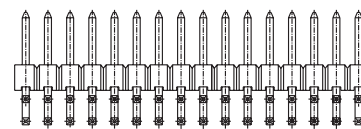

P/N: 2199R5-XXG-301523
A B C

Ordering Information

2199SB-XXG-XXXX

① ② ③ ④

① SB: Straight Double Rows	③ G: Gold Plated T: Tin Plated	④ Special Length A/B/C Dimension
② No. Of Contacts (4 To 80 Ways)		

2199RX-XXG-XXXX

① ② ③ ④

① R0: R0 Type, R5: R5 Type	③ G: Gold Plated T: Tin Plated	④ Special Length A/B/C Dimension
② No. Of Contacts (4 To 80 Ways)		

2199SBDI-XXG-XXXX

① ② ③ ④ ⑤

① SB: Straight Double Rows	③ No. Of Contacts (4 To 80 Ways)	⑤ Special Length D Dimension
② D I: Double Insulator	④ G: Gold Plated T: Tin Plated	

Recommended PCB Layout

