

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 4.43Lb.in
- 4.Wire range : 28~12AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20 A

2.Torque value : M3 , 0.5N·m

3.Wire range : 2.5mm²





NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=06~24P
- 3.Stripping length : 7~8mm
- 4.Operating temperature:-40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				
To	Over	To	Over	To	Over	
6	10	10	24	30	60	100
6	10	10	24	30	60	100
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±1.30
						±2'

6.RoHS Compliance

2EDG - URK - 5.08 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

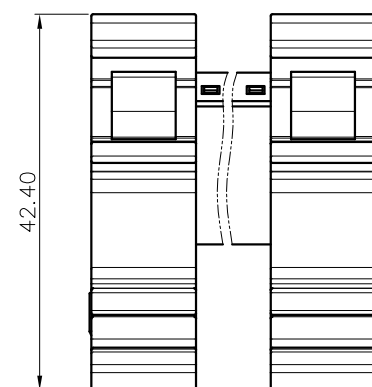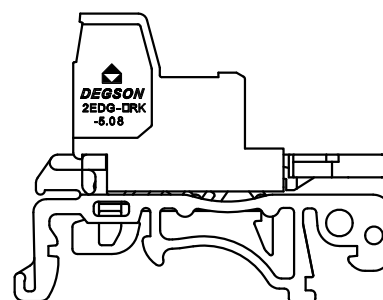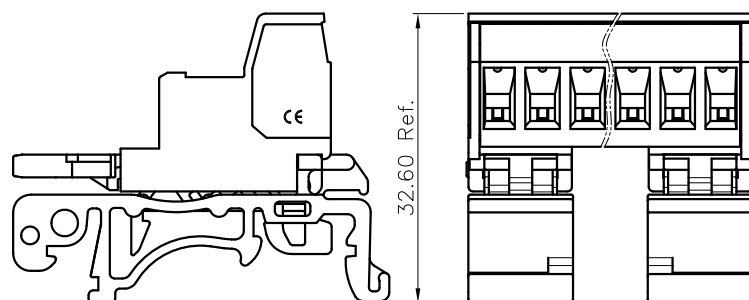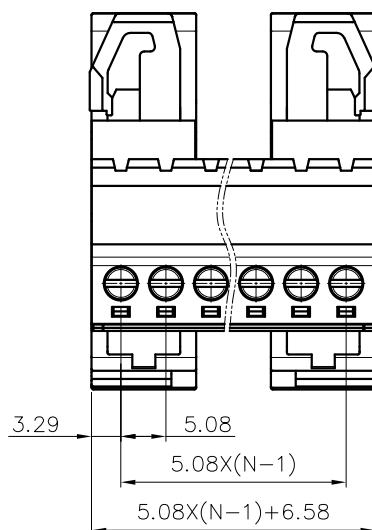

6-10P(Slots at both ends)



11-22P(Even number poles:3 slots,one in middle and the others at both ends)



11-22P(Odd number poles:3 slots,one offset to the left to center in the middle 2.54mm and the others at both ends)

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 2EDG-URK-5.08-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	REV			
THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET	
		DO NOT SCALE DRAWING		1/1	
		SCALE		1:1	