



REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------




02P



03P

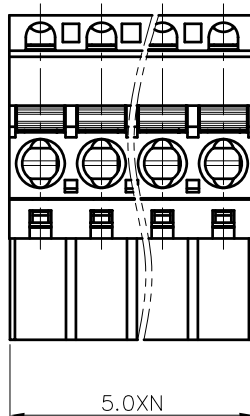


5.0xN



26.60

8.30

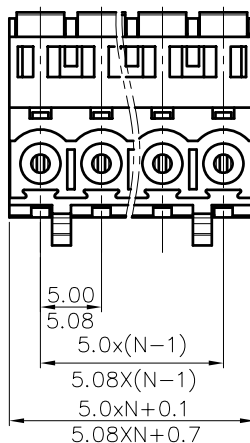

5.00


5.08

5.0x(N-1)

5.08x(N-1)

5.0xN+0.1

5.08xN+0.7

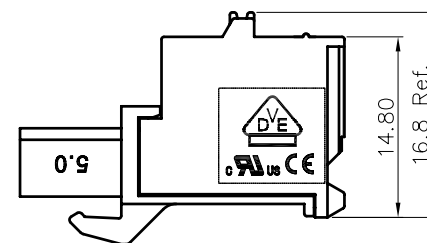

14.80

16.8 Ref.

2EDGKDB - 5.0/5.08 - XXP - 1Y - 00A (H)

(RoHS)

00A-(Standard)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 10A
- 2.Withstanding Voltage : AC1600V/1Min.
- 3.Wire Range : 26~12AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2.Wire Range : 0.2~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.00/5.08mm, Poles : N=02~24P/02~18P
- 3.Stripping length : 9~10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
TO	Over	Over	TO	Over	Over	Over	Over	Over	Over	
6	10	10	30	30	60	60	100	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.50	±2.0	

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME:			
	CHKD:	/				2EDGKDB-5.0/5.08-XXP-1Y-00A(H)			
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
		THIRD ANGLE PROJECTION		DRAWING NO.:		/		SHEET	1/1
				MM (INCH)		DO NOT SCALE DRAWING		SCALE	1:1