



D1RFRD006

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		图面更新	CSX	04/17/06
2		增加VDE、CE认证	Ye j	02/25/08
3		增加防松卡点位置尺寸标注	WLM	02/06/09
4	12-0216	关于电铸金镀层为镀金	WLG	01/05/13


Drill hole
(Max Ø0.8*1.2mm)*2

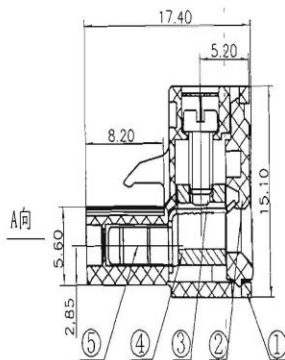

SECTION B-B

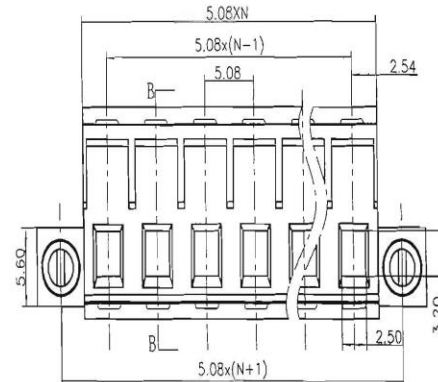


VIEW A

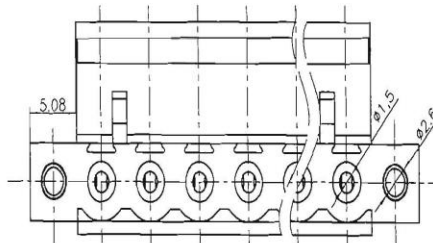

Notes:

- Pitch: 5.08mm, Poles: 2-22P
- Rated voltage/current: UL 300V/15A
VDE 320V/20A
- Operation temperatures: -45°C ~ +105°C
- Withstanding Voltage: AC2500V/1Min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 28~12AWG, 2.5mm²
- Max. Torque Value: M2.5, 4.08kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm		
over 6 to 6	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150
±0.10	±0.15	±0.25	±0.3	±0.5
±0.10	±0.15	±0.25	±0.3	±0.5



5	2EDG-Clamp	1005800010(H)	XX	Plastic	Sn plated
4	DC128 Brass cage	X000000020(H)	XX	Brass	Ni plated
3	2EDG~Screws-M2.5	S000001370(H)	XX+2	Steel	Cr ³⁺ Zn
2	2EDG~5.08-Cover	1005C0YXXA(H)	1	PA66	UL94V-0

1	2EDGKM-5.08-Housing	1011A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DFTO DZJ CHKO DATE 10/15/05 DATE 10/10/12 DATE 01/12/12		DEGSO® 宁波海正电子有限公司 DEGSO ELECTRONICS CO., LTD. NAME: 2EDGKM-5.08-XXP-1Y-00A(H) DRAWING NO. 2EDGKM-5.08-EC4 /PART NO. SIZE A4 REV 14 01/05/13			
TOLERANCES EXCEPT AS NOTED FINISH:		SCALE: 1:1 DO NOT SCALE DRAWING SHEET 1 OF 1			