



1 G

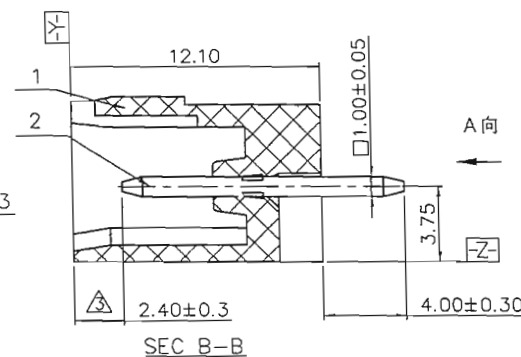

1. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
2. PITCH: 5.08MM ,POLES: 2-22P
3. RATED VOLTAGE/CURRENT: UL 300V/15A
VDE 320V/20A
4. OPERATION TEMPERATURES: -40°C~+105°C
5. RATED IMPULSE VOLTAGE: 4.0KV 
6. INSULATION RESISTANCE: 5000MΩ/DC1000V
7. UNDIMENSIONED TOLERANCES:

Pitch range in mm				Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

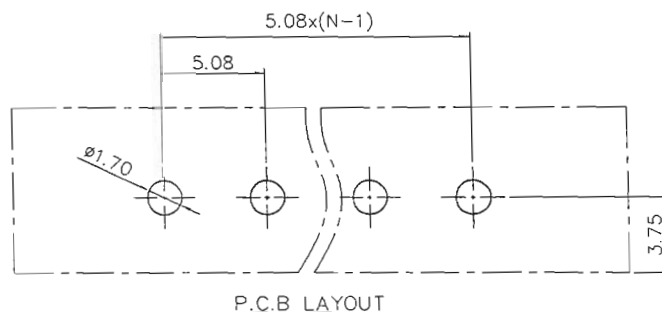

3	2EDG-Screw cap	S000001040(H)	2	BRASS	
2	2EDGV-Pin header	1007B00330(H)	XX	COPPER	Sn Plated
1	2EDGVM-5.08-Housing	1012A0YXXC(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS			NAME OF PART:		NAME OF PART:		NAME OF PART:		NAME OF PART:	
	TOLERANCES EXCEPT AS NOTED		FINISH:		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
	.X ± .XX ± .XXX ±		.X* ± .XX* ± .XXX* ±		PART NO.:		NAME: 2EDGVM-5.08+XXP-1Y-00A(H)			
	ANGLES ± 1°		APPD: <i>Daron</i>		TITLE: ASSEMBLY DRAWING			REV		T6
			CHKD: <i>Xm 12/15/16</i>		DRAWING NO.: 2EDGVM-5.08-E03					
	THIRD ANGLE PROJECTION		DRFT: WF 11/21/05"		DO NOT SCALE DRAWING		SCALE	N/A	SHEET	1/1

3