

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** [0019091046](#)  
**Status:** **Active**  
**Overview:** [standard\\_093](#)  
**Description:** 2.36mm Diameter Standard .093" Pin and Socket Receptacle Housing with Positive Latch, UL 94V-0, 4 Circuits

**Documents:**  
[3D Model](#)  
[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

|     |           |
|-----|-----------|
| CSA | LR19980   |
| TUV | R72081037 |
| UL  | E29179    |

**General**

|                |                                                 |
|----------------|-------------------------------------------------|
| Product Family | Crimp Housings                                  |
| Series         | <a href="#">3191</a>                            |
| Application    | Power, Wire-to-Board, Wire-to-Wire              |
| Comments       | Polarized to Mating Part, without Mounting Ears |
| Overview       | <a href="#">standard_093</a>                    |
| Product Name   | Standard .093"                                  |

**Physical**

|                               |                 |
|-------------------------------|-----------------|
| Breakaway                     | No              |
| Circuits (maximum)            | 4               |
| Circuits Detail               | 2x2             |
| Color - Resin                 | Natural         |
| Flammability                  | 94V-2           |
| Gender                        | Dual            |
| Glow-Wire Compliant           | No              |
| Keying to Mating Part         | None            |
| Lock to Mating Part           | Yes             |
| Material - Resin              | Nylon           |
| Number of Rows                | 1               |
| Packaging Type                | Bag             |
| Panel Mount                   | No              |
| Pitch - Mating Interface      | 6.70mm          |
| Polarized to Mating Part      | Yes             |
| Stackable                     | No              |
| Temperature Range - Operating | -40°C to +105°C |

**Electrical**


|                               |    |
|-------------------------------|----|
| Current - Maximum per Contact | 9A |
|-------------------------------|----|

**Material Info**

|                 |              |
|-----------------|--------------|
| Old Part Number | 3191-4R1-201 |
|-----------------|--------------|

**Reference - Drawing Numbers**

|               |            |
|---------------|------------|
| Sales Drawing | SD-3191-4* |
|---------------|------------|

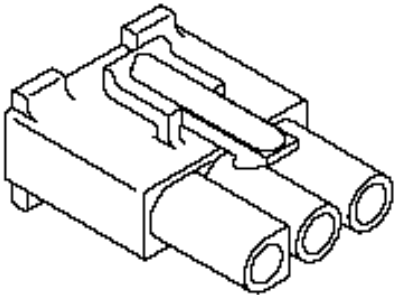

Series

image - Reference only

**EU RoHS**

**ELV and RoHS  
Compliant**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

**Low-Halogen**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of  
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any  
non-product compliance questions.

**Search Parts in this Series**

[3191](#)Series

**Mates With**

[3191](#) Pin and Socket Plug, [5219](#) Vertical  
PCB Header

**Use With**

[1189](#) Crimp Terminals, [1190](#) Crimp  
Terminals, [1380](#) Male Crimp Terminals,  
[1381](#) Female Crimp Terminals, [1433](#) Crimp  
Terminals, [1434](#) Male Crimp Terminals,  
[2605](#) , [2606](#) , [1973](#) , [2151](#) , [2273](#) , [2870](#) ,  
[2871](#) , [4272](#)