

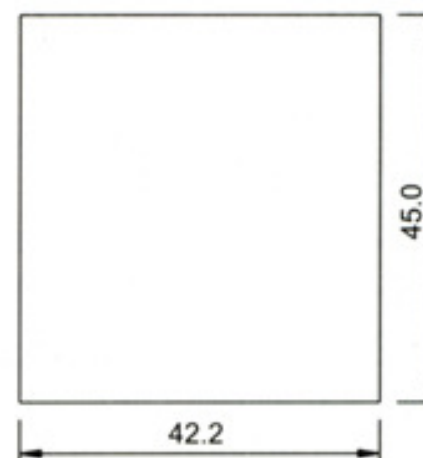
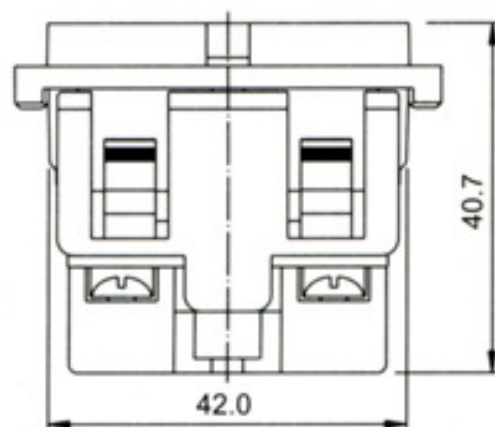


SPECIFICATION:

- 1.RATING : 16A 250V~
- 2.INSULATION RESISTANCE : DC 500V 5M Ω OR MORE
- 3.WITHSTAND VOLTAGE : 2000V RMS 50Hz 1 Min.

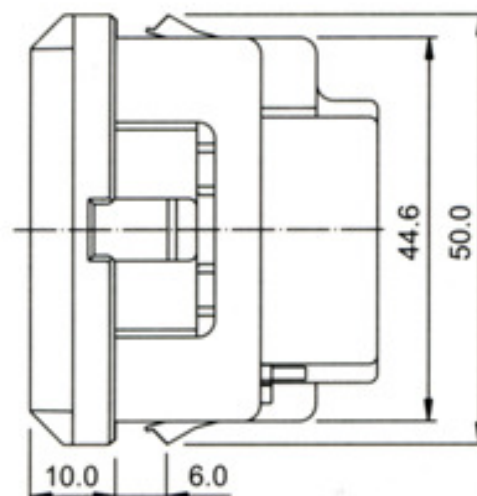

3531

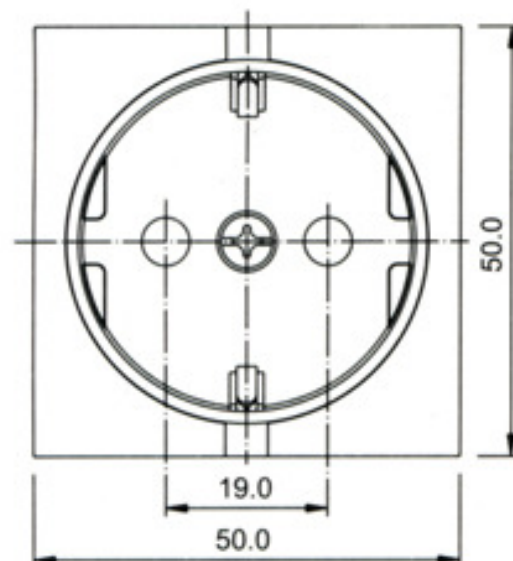

MOUNTING HOLE
(FOR REFERENCE)
PANEL THICK:4.0~5.0

