


DIMENSIONS

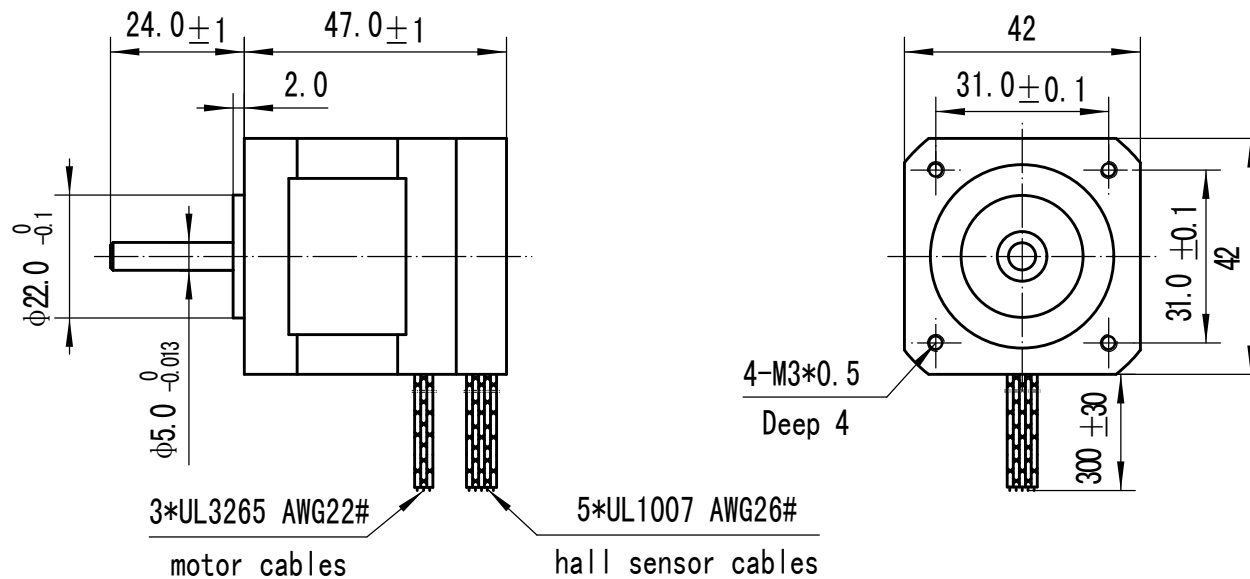


ROTATION: CW SEE FROM SHAFT END


MANUFACTURE MODEL	42BLF01
PHASE	3
PH-PH RESISTANCE	2.0±10% OHMS
NOMINAL VOLTAGE	24 VDC
NO LOAD SPEED	5000±10% RPM
RATED TORQUE	0.063 N.m
RATED SPEED	4000±10% RPM
RATED OUTPUT POWER	26 W
BACK EMF CONSTANT	3.7 V/kRPM
TORQUE CONSTANT	0.035 N.m/A

ELECTRICAL CONNECTION TABLE			
+5V	RED	红	26 AWG UL1007
HALL U	YELLOW	黄	
HALL V	GREEN	绿	
HALL W	BLUE	蓝	
GND	BLACK	黑	22 AWG UL3265
PHASE U	YELLOW	黄	
PHASE V	GREEN	绿	
PHASE W	BLUE	蓝	

Connection diagram:

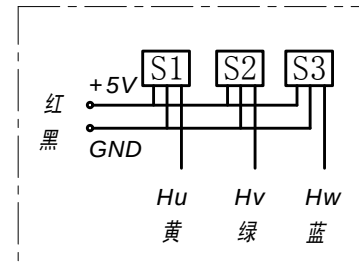

Hall sensor cable
Note: hall sensor power supply voltage +5 to +20 VDC



Wiring cable

旧底图号

底图总号

日期 签名

格式 (1)

					42BLF01	WANTAI MOTOR		
更改 标记		更改单号	签 名	日 期		等级标记	重 量	比 例
设 计 审 核 工 艺		Luther	2014.6.9		A		1 : 1	
					技术规格书	1	共 张	
标准化						www.wantmotor.com		
批 准								

制图:

描图:

幅面: 3#