

RC NETWORKS

RC combination including a self-healing capacitor winding with polypopylene dielectric and a series connected fixed resistor, enclosed as per enclosure table.

TECHNICAL DATA

Manufacturing Standard.

Manufactured to BS 613

1 RATED VOLTAGE:

As per Table

2. CAPACITANCE TOLERANCE:



+20%

3. RESISTANCE TOLERANCE:

+10%

4. INSULATION RESISTANCE:

>30,000 M. Ohms.

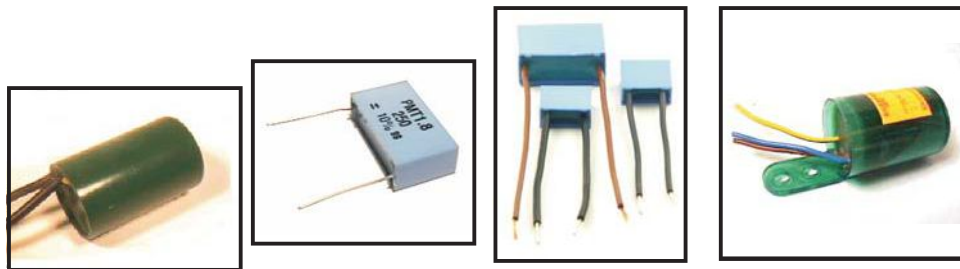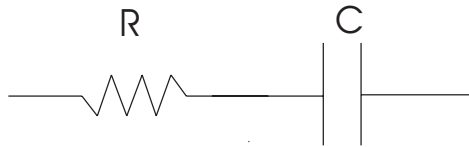

ENCLOSURE TABLE

I1	E.1 P.C. Mount	E.1. Flexible Leads	B.2.

Rated Voltage.	Capacitance uf.	Resistance Ohms.	Case Type	Code	Remarks
250 V.A.C.	.1	47	I1	44/175	
250 V.A.C.	.1	100	I1	44/314	
250 V.A.C.	.1	100	E1 P.C. Mount	44/424	
Dual 400 V.A.C.	.1	47	B2	44/244	
500 V.A.C.	.047	100	E1 Flexible Leads	44/229	