






CS Type
(Thru Hole)




CC Type
(Not Thru Hole)

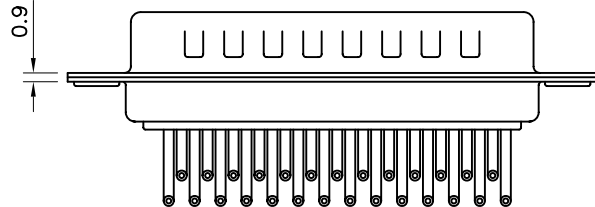

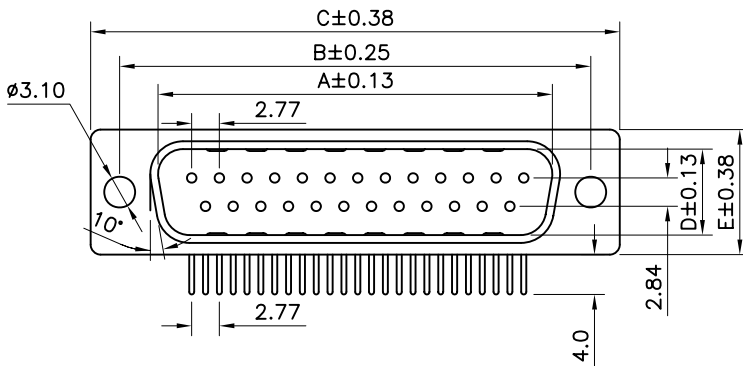

Pos	A	B	C	D	E
9	16.92	24.99	30.81	8.38	12.50
15	25.25	33.32	39.14	8.38	12.50
25	38.96	47.04	53.04	8.38	12.50
37	55.42	63.50	69.32	8.38	12.50

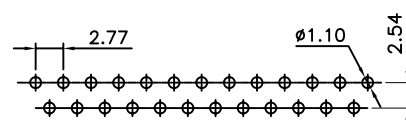

P.C.B. Layout

Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:5,000M ohm. min.

Withstanding Voltage:1,000V AC For One Minute

Operating Temperature Range:-40°C ~ +85°C

Material and Finish

Insulator:PBT (UL94V-0)

Contact:Copper Alloy With Gold Plated

Shell:Metal Iron with Nickel plated

How To Order

5505F2-XXP-XX

- Blank:Standard Type
- CS:Rear Rivet
- CC:Front Rivet
- Machine pin Male
- No. Of Positions
- F2:9.4mm Footprint

F

E

D

C

B

A

REV

21-Jul-2008

22-Aug-2006

DATE

ECN-CN080715

(P0258)

FILE

Huadi

Cel king

BY

Cel King

Jeremy Liu

Mike Wu

GENERAL TOLERANCE:

.X=±0.20


.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:





繼德工業股份有限公司

Neltron Industrial Co., Ltd.

DESCRIPTION:

D-SUB Male Right Angle

9.4mm Footprint Machine pin Type

PART NO:

5505F2-XXP-XX

SIZE

A4

RoHS Compliant