

Part No.	5R3VC-A15U625	Spec No.		Page	1 of 4
----------	---------------	----------	--	------	--------

Features

- ◆ Low power consumption
- ◆ High efficiency
- ◆ Low current requirement
- ◆ Choice of various viewing angles
- ◆ Versatile mounting on P.C. Board or panel
- ◆ Reliable and robust
- ◆ Pb free
- ◆ The product itself will remain within RoHS compliant version


Descriptions

- ◆ The series is specially designed for applications requiring higher brightness.
- ◆ The led lamps are available with different colors, intensities.

Applications

- ◆ TV set
- ◆ Monitor
- ◆ Telephone
- ◆ Computer
- ◆ Circuit board.

Package Dimension:

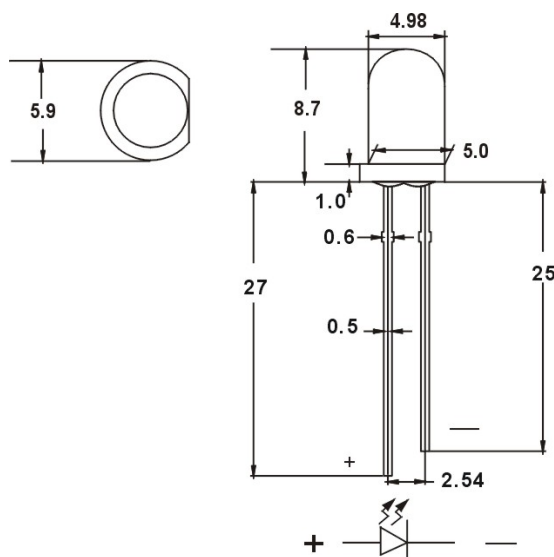

NOTE:TOLERANCE $\pm 0.5\text{mm}$

Part NO.	Material	Lens Color	Source Color
5R3VC-A15U625	AlGaInP	Water Clear	Hyper Red

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerances unless Dimension $\pm 0.25\text{mm}$.
3. An epoxy meniscus may extend about 1.5mm (0.059") down to the lead.

Part No.	5R3VC-A15U625	Spec No.		Page	1 of 3
----------	---------------	----------	--	------	--------

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	MAX.	Unit
Power Dissipation	P _D	80	mW
Peak Forward Current (1/10 Duty Cycle,0.1ms Pulse Width)	I _{FP}	100	mA
Continuous Forward Current	I _F	50	mA
Reverse Voltage	V _R	5	V
Operating Temperature Range	Topr	-40°C to +80°C	
Storage Temperature Range	Tstg	-40°C to +85°C	
Lead Soldering Temperature [4mm(.157") From Body]	Tsol	260°C for 5 Seconds	

Electrical Optical Characteristics: at Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _V		10000		mcd	I _F =20mA
View Angle of Half Power	2θ _{1/2}		15		deg	I _F =20mA
Peak Emission Wavelength	λ _P		630		nm	I _F =20mA
Dominant Wavelength	λ _d	620		630	nm	I _F =20mA
Spectral Line Half-Width	△λ		15		nm	I _F =20mA
Forward Voltage	V _F		2.0	2.5	V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V

Notes:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength, which defines the color of the device.

Part No.	5R3VC-A15U625	Spec No.		Page	2 of 3
----------	---------------	----------	--	------	--------

Typical Electrical/Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

