

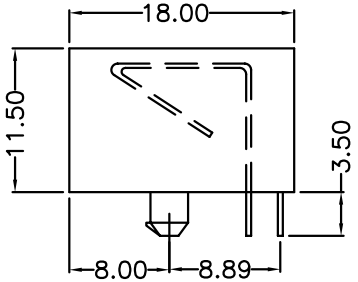



position	conductor	A	B	C
4P	4C	11.20	7.62	7.80
6P	2C/4C/6C	13.20	10.16	10.00
8P	8C	15.20	11.43	12.00
10P	10C	15.20	11.43	12.00



Specifications:
Current Rating:1.5A AC/DC
Voltage Rating:125V AC/DC
Contact Resistance:30m ohm. Max.
Insulation Resistance:20M ohm. Min.
Withstanding Voltage:500V AC For One Mminute
Operating Temperature Range:−40°C ~ +105°C
Material and Finish
Insulator:PBT (UL94V−0)
Insulator Color:Black
Contact:Phosphor Bronze
Plating:Gold Plated on Contact Area, B
Tin Plated on Solder Tail.
Shielding:Copper Alloy With Nickel Plated
How to Order
7950−XPXC−F1
RoHS
No.Of Contacts
No.Of Positions

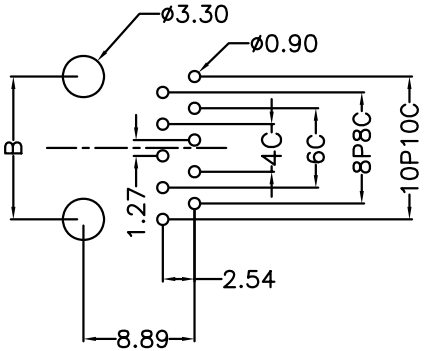

PCB Layout (Top View)

RoHS Compliant

REV	DATE	FILE	BY
E			
D			
C			
B	05−May−2008	ECN−CN080511	Huali
A	01−Nov−2006	(P0041)	Mary

DRAWN: Jerry Chen
CHECKED: Jeremy Liu
APPROVAL: Mike Wu

GENERAL TOLERANCE:
.X=±0.25
.XX=±0.20

UNIT: mm
SCALE:
SHEET: 1 / 1
PROJECTION:

繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION: Modular Jack 11.5X18mm
PART NO: 7950−XPXC−F1
SIZE: A4