


2W, Fixed input voltage, isolated & unregulated
dual /single output

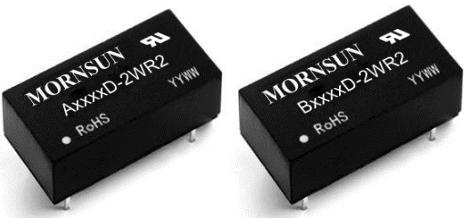

FEATURES

- Continuous short-circuit protection
- Operating temperature range: -40°C to +85°C
- High efficiency up to 84%
- High power density
- Miniature DIP package
- Isolation voltage: 1500VDC
- No external component required
- International standard pin-out

A_D-2WR2 & B_D-2WR2 series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for

1. Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%$ Vin);
2. Where isolation between input and output is necessary (isolation voltage ≤ 1500 VDC);
3. Where the output voltage regulation is not strictly required;
4. Typical application: digit circuit condition; normal low-frequency artificial circuit condition; relay drive circuit and data switching circuit condition, etc.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Efficiency (% Min./Typ.) @ Full Load	Max. Capacitive Load*(μF)
			Nominal (Range)	Output Voltage (VDC)		
--	B0303D-2WR2	3.3 (2.97-3.63)	3.3	400/40	66/70	220
	B0305D-2WR2		5	400/40	74/78	
UL/CE	A0505D-2WR2	5 (4.5-5.5)	±5	±200/±20	76/80	100
	A0509D-2WR2		±9	±111/±11	80/84	
	A0512D-2WR2		±12	±83/±8	80/84	
	A0515D-2WR2		±15	±67/±7	80/84	
	A0524D-2WR2		±24	±42/±4	80/84	
	B0503D-2WR2		3.3	400/40	70/74	
UL/CE	B0505D-2WR2	5 (4.5-5.5)	5	400/40	76/80	220
	B0509D-2WR2		9	222/22	80/84	
	B0512D-2WR2		12	167/17	80/84	
	B0515D-2WR2		15	133/13	80/84	
	B0524D-2WR2		24	83/8	80/84	
--	B0915D-2WR2	9 (8.1-9.9)	15	133/13	79/83	220
UL/CE	A1205D-2WR2	12 (10.8-13.2)	±5	±200/±20	76/80	100
	A1209D-2WR2		±9	±111/±11	80/84	
	A1212D-2WR2		±12	±83/±8	79/83	
	A1215D-2WR2		±15	±67/±7	80/84	
	A1224D-2WR2		±24	±42/±4	80/84	
	B1205D-2WR2		5	400/40	76/80	220
	B1209D-2WR2		9	222/22	79/83	
	B1212D-2WR2		12	167/17	78/82	
	B1215D-2WR2		15	133/13	80/84	
	B1224D-2WR2		24	83/8	80/84	
--	A1515D-2WR2	15 (13.5-16.5)	±15	±67/±7	80/84	100

UL/CE	A2405D-2WR2	24 (21.6-26.4)	±5	±200/±20	75/79	100
	A2409D-2WR2		±9	±111/±11	80/84	
	A2412D-2WR2		±12	±83/±8	79/83	
	A2415D-2WR2		±15	±67/±7	80/84	
	A2424D-2WR2		±24	±42/±4	80/84	
	B2405D-2WR2		5	400/40	75/79	
	B2409D-2WR2		9	222/22	81/85	220
	B2412D-2WR2		12	167/17	79/83	
	B2415D-2WR2		15	133/13	80/84	
	B2424D-2WR2		24	83/8	80/84	

Note: *The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	3.3V input	--	777/40	--/70	mA
	5V input	--	500/35	--/60	
	9V input	--	278/25	--/60	
	12V input	--	208/20	--/50	
	15V input	--	159/15	--/35	
	24V input	--	105/10	--/30	
Reflected Ripple Current		--	15	--	mA
Surge Voltage (1sec. max.)	3.3V input	-0.7	--	5	VDC
	5V input	-0.7	--	9	
	9V input	-0.7	--	12	
	12V input	-0.7	--	18	
	15V input	-0.7	--	21	
	24V input	-0.7	--	30	
Input Filter			Filter capacitor		
Hot Plug			Unavailable		

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		See tolerance envelope graph (Fig. 1)			
Line Regulation	Input voltage change: ±1%	3.3V output	--	±1.5	--
		Others output	--	±1.2	
Load Regulation	10%-100% load	3.3VDC output	--	15	%
		5VDC output	--	12	
		9VDC output	--	9	
		12VDC output	--	8	
		15VDC output	--	7	
		24VDC output	--	6	
Ripple & Noise*	20MHz bandwidth	--	75	200	mVp-p
Temperature Drift Coefficient	100% load	--	--	±0.03	%/°C
Short Circuit Protection**	A24xxD-2WR2/B24xxD-2WR2 A0512D-2WR2/A0515D-2WR2 A0524D-2WR2/B0524D-2WR2	--	--	1	s
	Others		Continuous, self-recovery		

Note: *Ripple and noise tested with "parallel cable" method, please see *DC-DC Converter Application Notes* for specific operation methods.

**Supply voltage must be discontinued at the end of short circuit duration for A24xxD-2WR2/B24xxD-2WR2 series, and A0512D-2WR2/A0515D-2WR2/A0524D-2WR2/B0524D-2WR2 models.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA		1500	--	--	VDC
Insulation Resistance	Input-output, insulation voltage 500VDC		1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	24V Input	--	50	--	pF
		Other input	--	20	--	
Operating Temperature	Derating if the temperature $\geq 85^{\circ}\text{C}$ (see Fig. 2)		-40	--	85	
Storage Temperature			-55	--	125	
Casing Temperature Rise	$T_a=25^{\circ}\text{C}$		--	25	--	
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds		--	--	300	
Storage Humidity	Non-condensing		--	--	95	%RH
Switching Frequency	100% load, nominal input voltage		--	100	--	KHz
MTBF	MIL-HDFK-217F@25°C		3500	--	--	K hours

Physical Specifications

Casing Material	Black flame-retardant heat-proof epoxy resin (UL94-V0)		
Dimensions	20.32*10.16*8.20mm		
Weight	2.8g(Typ.)		
Cooling Method	Free convection		

EMC Specifications

EMI	CE	CISPR22/EN55022	CLASS B (see Fig. 4 for recommended circuit)
	RE	CISPR22/EN55022	CLASS B (see Fig. 4 for recommended circuit)
EMS	ESD	A_D-2WR2	IEC/EN61000-4-2 Contact $\pm 6\text{kV}$ perf. Criteria B
		B_D-2WR2	IEC/EN61000-4-2 Contact $\pm 8\text{kV}$ perf. Criteria B

Product Characteristic Curve

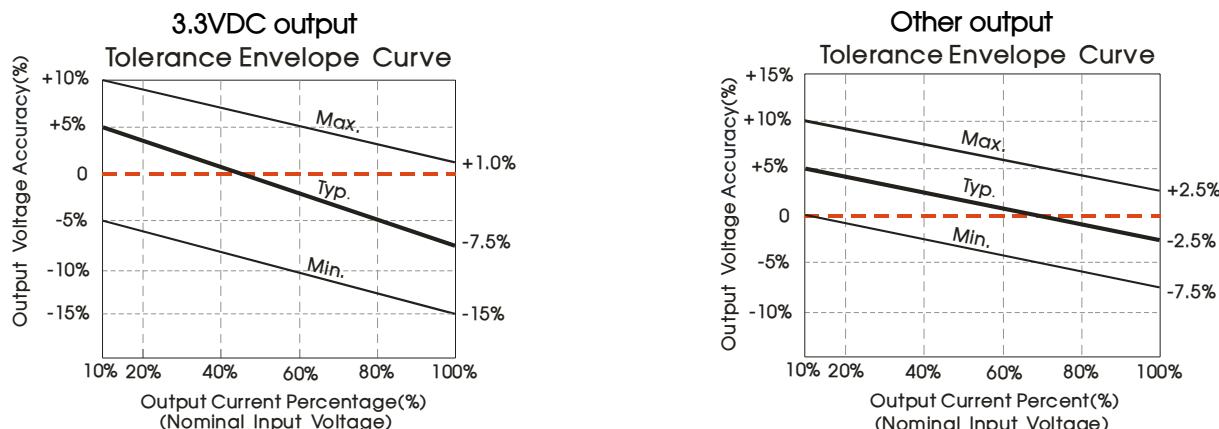


Fig. 1
Temperature Derating Curve


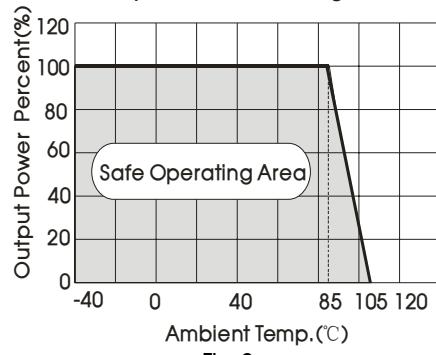


Fig. 2

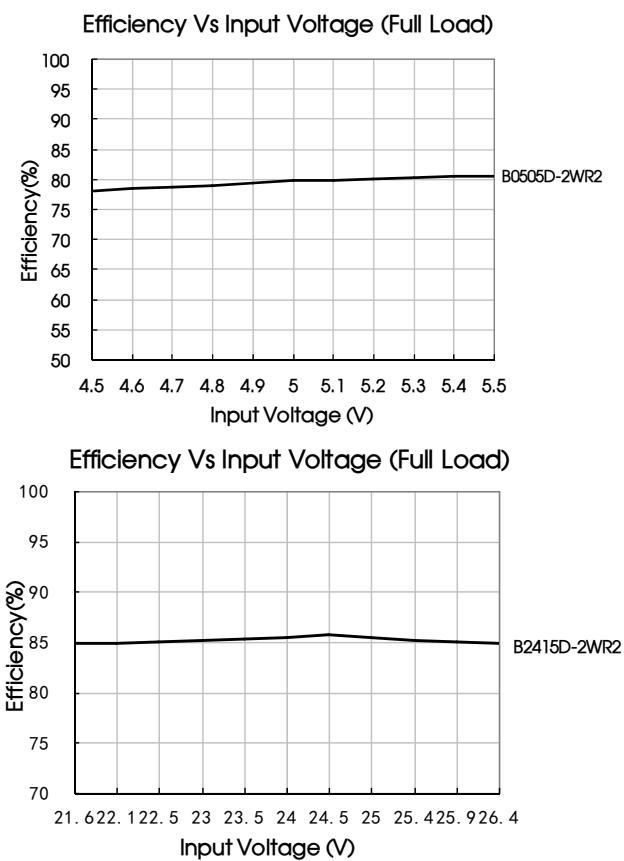

Design Reference

1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.3. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1.

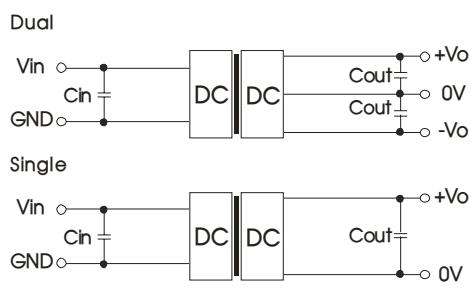


Fig.3

Recommended capacitive load value table (Table 1)

Vin (VDC)	Cin (μ F)	Single Vout(VDC)	Cout (μ F)	Dual Vout(VDC)	Cout* (μ F)
3.3	4.7	3.3	10	± 5	4.7
5	4.7	5	10	± 9	2.2
9	2.2	9	4.7	± 12	1
12	2.2	12	2.2	± 15	0.47
15/24	1	15/24	1	± 24	0.47

Note: *It is not recommended to connect any external capacitor when output power is less than 0.5W.

2. EMC typical recommended circuit (CLASS B)

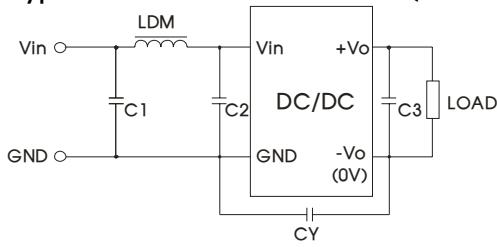


Fig.4

Input voltage (VDC)	3.3/5/9/12/15	24
	C1/C2	4.7 μ F /50V
EMI	C3	Refer to the Cout in Fig.3
	CY	--
	LDM	1nF/2KV
		6.8 μ H


Note: 1. 24V input series is subject to CY (CY : 1nF/2KV).
2. It is not needed to add the component in the peripheral circuit when parameter with the symbol of "-".

3. Output load requirements

To ensure the module work efficiently and reliably, during the operation, the min. output load should be no less than 10% of the full load. If the actual output power is low, please connect a resistor to the output terminal in parallel, with a recommended resistance which is 10% of the rated power, and derating is required during operation.

4. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

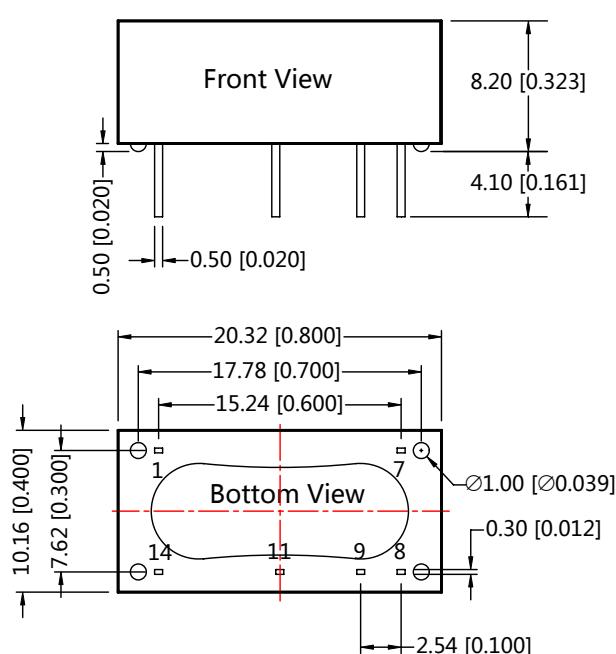


Note:

Unit :mm[inch]

Pin section tolerances : ± 0.10 [± 0.004]

General tolerances: ± 0.25 [± 0.010]

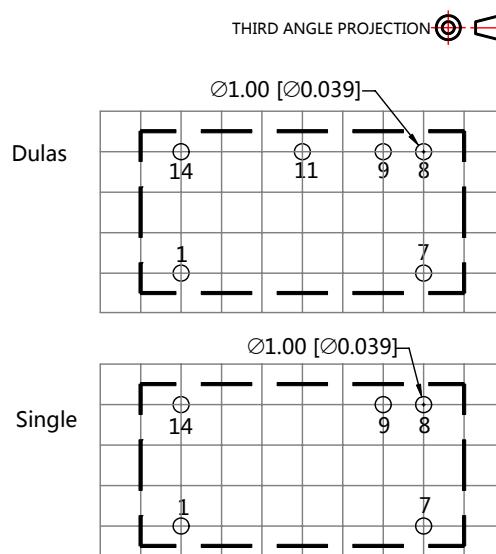

Note : Grid 2.54*2.54mm

Pin-Out		
Pin	Single	Dulas
1	GND	GND
7	NC	NC
8	0V	0V
9	+Vo	+Vo
11	No Pin	-Vo
14	Vin	Vin

NC:No connection

Notes:

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Packing bag number: 58200009;
 2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
 3. The maximum capacitive load offered were tested at nominal input voltage and full load;
 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% with nominal input voltage and rated output load;
 5. All index testing methods in this datasheet are based on our Company's corporate standards;
 6. The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;
 7. We can provide product customization service;
 8. Specifications are subject to change without prior notice.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China

Tel: 86-20-38601850-8801

Fax: 86-20-38601272

E-mail: info@mornsun.cn

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.