

1W isolated DC-DC converter
Fixed input voltage, unregulated single or dual output



UL **US** **CE** Patent Protection **RoHS**

FEATURES

- High power density
- High efficiency of up to 80%
- Operating ambient temperature range: -40°C ~ +105°C
- Ultra compact SIP package
- Industry standard pin-out
- I/O isolation test voltage 1.5k VDC
- UL60950/EN60950 Approved

A_S-1WR2 & B_LS-1WR2 series is designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits, where:

1. The voltage of the input power supply is relatively stable with a variation of $\pm 10\%V_{in}$ or less;
2. An input to output isolation voltage of up to 1500VDC is necessary;
3. The requirement for a tight line and load regulation is not as strict.

Selection Guide

| Certification | Part No. | Input Voltage (VDC) | Output | | Full Load Efficiency (%) Min./Typ. | Capacitive Load*(μ F) Max. | | | |
|---------------|--------------|---------------------|----------------|--------------------------|---------------------------------------|------------------------------------|------------------|-------|-----|
| | | Nominal (Range) | Voltage (VDC) | Current(mA) Max./Min. | | | | | |
| -- | A0315S-1WR2 | 3.3 (2.97-3.63) | ± 15 | $\pm 34/\pm 4$ | 72/76 | 100 | | | |
| | B0303LS-1WR2 | | 3.3 | 303/31 | 68/72 | 220 | | | |
| | B0305LS-1WR2 | | 5 | 200/20 | 74/78 | | | | |
| UL/CE | A0503S-1WR2 | 5 (4.5-5.5) | ± 3.3 | $\pm 152/\pm 15$ | 67/71 | 100 | | | |
| | A0505S-1WR2 | | ± 5 | $\pm 100/\pm 10$ | 76/80 | | | | |
| | A0509S-1WR2 | | ± 9 | $\pm 56/\pm 6$ | 76/80 | | | | |
| | A0512S-1WR2 | | ± 12 | $\pm 42/\pm 5$ | 76/80 | | | | |
| | A0515S-1WR2 | | ± 15 | $\pm 34/\pm 4$ | 76/80 | | | | |
| -- | A0524S-1WR2 | 5 (4.5-5.5) | ± 24 | $\pm 21/\pm 3$ | 76/80 | 220 | | | |
| | B0503LS-1WR2 | | 3.3 | 303/31 | 70/74 | | | | |
| | B0505LS-1WR2 | | 5 | 200/20 | 76/80 | | | | |
| | B0509LS-1WR2 | | 9 | 111/11 | 76/80 | | | | |
| | B0512LS-1WR2 | | 12 | 84/9 | 76/80 | | | | |
| | B0515LS-1WR2 | | 15 | 67/7 | 76/80 | | | | |
| UL/CE | B0524LS-1WR2 | 5 (4.5-5.5) | 24 | 42/5 | 76/80 | 220 | | | |
| | A0909S-1WR2 | | ± 9 | $\pm 56/\pm 6$ | 76/80 | | | | |
| | A0915S-1WR2 | | ± 15 | $\pm 34/\pm 4$ | 76/80 | | | | |
| | -- | | A1203S-1WR2 | 9 (8.1-9.9) | ± 3.3 | | $\pm 152/\pm 15$ | 72/76 | 100 |
| | | | A1205S-1WR2 | | ± 5 | | $\pm 100/\pm 10$ | 76/80 | |
| | | | A1209S-1WR2 | | ± 9 | | $\pm 56/\pm 6$ | 76/80 | |
| | | | A1212S-1WR2 | | ± 12 | | $\pm 42/\pm 5$ | 76/80 | |
| A1215S-1WR2 | | ± 15 | $\pm 34/\pm 4$ | | 76/80 | | | | |
| UL/CE | A1224S-1WR2 | 12 (10.8-13.2) | ± 24 | $\pm 21/\pm 3$ | 76/80 | 220 | | | |
| | B1203LS-1WR2 | | 3.3 | 303/31 | 72/76 | | | | |
| | B1205LS-1WR2 | | 5 | 200/20 | 76/80 | | | | |
| UL/CE | B1209LS-1WR2 | 12 (10.8-13.2) | 9 | 111/11 | 76/80 | 220 | | | |
| | B1212LS-1WR2 | | 12 | 84/9 | 76/80 | | | | |
| | B1215LS-1WR2 | | 15 | 67/7 | 76/80 | | | | |
| UL/CE | B1224LS-1WR2 | 12 (10.8-13.2) | 24 | 42/5 | 76/80 | 220 | | | |

| | | | | | | |
|-------|--------------|-------------------|--------|----------|-------|-----|
| -- | A1505S-1WR2 | 15 (13.5-16.5) | ±5 | ±100/±10 | 76/80 | 100 |
| | A1512S-1WR2 | | ±12 | ±42/±5 | 76/80 | |
| UL | A1515S-1WR2 | | ±15 | ±34/±4 | 76/80 | |
| CE | B1505LS-1WR2 | | 5 | 200/20 | 76/80 | 220 |
| -- | B1512LS-1WR2 | | 12 | 84/9 | 76/80 | |
| CE | B1515LS-1WR2 | | 15 | 67/7 | 76/80 | |
| UL/CE | A2405S-1WR2 | 24 (21.6-26.4) | ±5 | ±100/±10 | 76/80 | 100 |
| | A2409S-1WR2 | | ±9 | ±56/±6 | 76/80 | |
| | A2412S-1WR2 | | ±12 | ±42/±5 | 76/80 | |
| | A2415S-1WR2 | | ±15 | ±34/±4 | 76/80 | |
| | A2424S-1WR2 | | ±24 | ±21/±3 | 76/80 | |
| -- | B2403LS-1WR2 | | 3.3 | 303/31 | 70/74 | 220 |
| UL/CE | B2405LS-1WR2 | 5 | 200/20 | 76/80 | | |
| | B2409LS-1WR2 | 9 | 111/11 | 76/80 | | |
| | B2412LS-1WR2 | 12 | 84/9 | 76/80 | | |
| | B2415LS-1WR2 | 15 | 67/7 | 76/80 | | |
| | B2424LS-1WR2 | 24 | 42/5 | 76/80 | | |

Note: * The specified maximum capacitive load for positive and negative output is identical

Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------------|----------------------|--------------------|--------|-------|------|
| Input Current (full load / no-load) | 3.3V input | -- | 426/30 | --/70 | mA |
| | 5V input | -- | 281/25 | --/60 | |
| | 9V input | -- | 142/20 | --/60 | |
| | 12V input | -- | 106/15 | --/50 | |
| | 15V input | -- | 84/10 | --/35 | |
| | 24V input | -- | 54/7 | --/30 | |
| Surge Voltage (1sec. max.) | 3.3V input | -0.7 | -- | 5 | VDC |
| | 5V input | -0.7 | -- | 9 | |
| | 9V input | -0.7 | -- | 12 | |
| | 12V input | -0.7 | -- | 18 | |
| | 15V input | -0.7 | -- | 21 | |
| | 24V input | -0.7 | -- | 30 | |
| Reflected Ripple Current* | | -- | 15 | -- | mA |
| Input Filter | | Capacitance filter | | | |
| Hot Plug | | Unavailable | | | |

Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit | |
|-------------------|---------------------------|--------------------------------------|------|------|-------|----|
| Voltage Accuracy | | See output regulation curve (Fig. 1) | | | | |
| Linear Regulation | Input voltage change: ±1% | 3.3VDC output | -- | -- | ±1.5 | -- |
| | | Other output | -- | -- | ±1.2 | |
| Load Regulation | 10%-100% load | 3.3VDC output | -- | 18 | -- | % |
| | | 5VDC output | -- | 12 | -- | |
| | | 9VDC output | -- | 9 | -- | |
| | | 12VDC output | -- | 8 | -- | |
| Load Regulation | 10%-100% load | 15VDC output | -- | 7 | -- | % |
| | | 24VDC output | -- | 6 | -- | |
| Ripple & Noise* | 20MHz bandwidth | -- | 60 | 150 | mVp-p | |

| | | | | | |
|----------------------------|--|---------------------------|----|-------|------|
| Temperature Coefficient | 100% load | -- | -- | ±0.03 | %/°C |
| Short-circuit Protection** | B03xxLS-1WR2/A24xxS-1WR2 /B24xxLS-1WR2 A0524S-1WR2/B0524LS-1WR2/A0315S-1WR2 | -- | -- | 1 | s |
| | others | Continuous, self-recovery | | | |

Notes: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.
 ** At the end of the short circuit duration, the supply voltage must be disconnected from following models: B03xxLS-1WR2 series, A24xxS-1WR2 /B24xxLS-1WR2 series, and A0524S-1WR2/ B0524LS-1WR2/A0315S-1WR2.

General Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|---|------|------|------|---------|
| Isolation | Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max. | 1500 | -- | -- | VDC |
| Insulation Resistance | Input-output resistance at 500VDC | 1000 | -- | -- | MΩ |
| Isolation Capacitance | Input-output capacitance at 100kHz/0.1V | -- | 20 | -- | pF |
| Operating Temperature | Derating if the temperature ≥85° C, (see Fig. 2) | -40 | -- | 105 | °C |
| Storage Temperature | | -55 | -- | 125 | |
| Case Temperature Rise | Ta=25°C | -- | 25 | -- | |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10 seconds | -- | -- | 300 | |
| Storage Humidity | Non-condensing | -- | -- | 95 | %RH |
| Switching Frequency | 100% load, nominal input voltage | -- | 100 | -- | kHz |
| MTBF | MIL-HDBK-217F @ 25°C | 3500 | -- | -- | k hours |

Mechanical Specifications

| | |
|-----------------|---|
| Case Material | Black epoxy resin; flame-retardant heat- resistant (UL94 V-0) |
| Dimensions | 19.50 x 6.00 x 9.30 mm |
| Weight | 2.4g (Typ.) |
| Cooling methods | Free air convection |

Electromagnetic Compatibility (EMC)

| | | | | | |
|-----------|-----|--|-----------------|--------------|------------------|
| Emissions | CE | CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) | | | |
| | RE | CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) | | | |
| Immunity | ESD | A_S-1WR2 | IEC/EN61000-4-2 | Contact ±6KV | perf. Criteria B |
| | | B_LS-1WR2 | IEC/EN61000-4-2 | Contact ±8KV | perf. Criteria B |

Typical Performance Curves

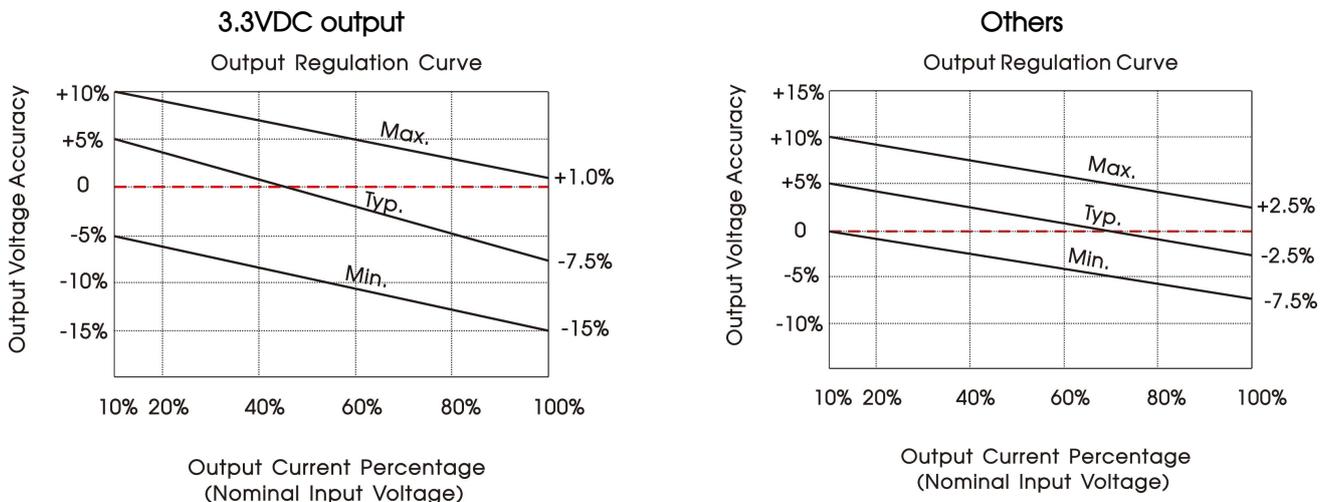


Fig. 1





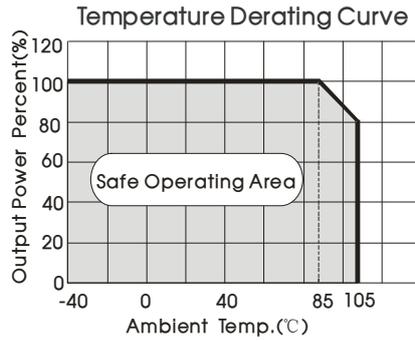


Fig. 2

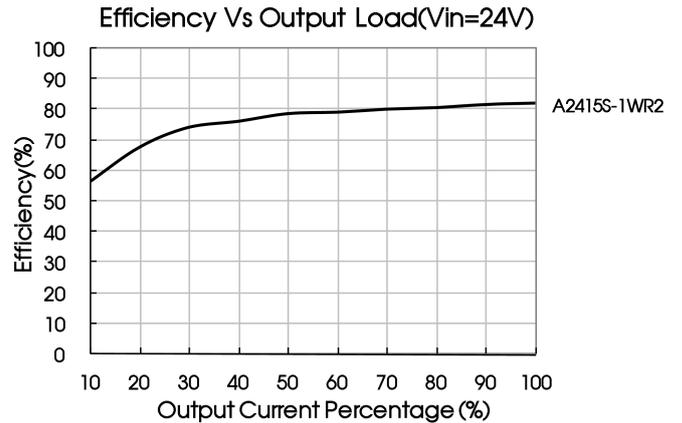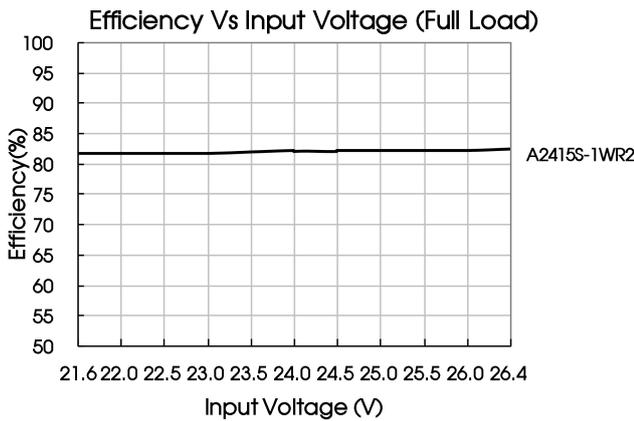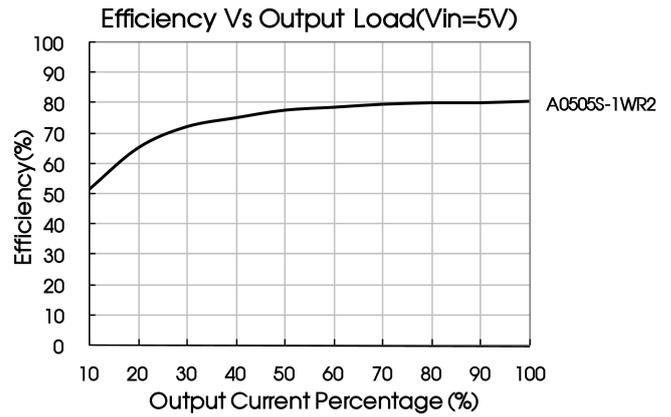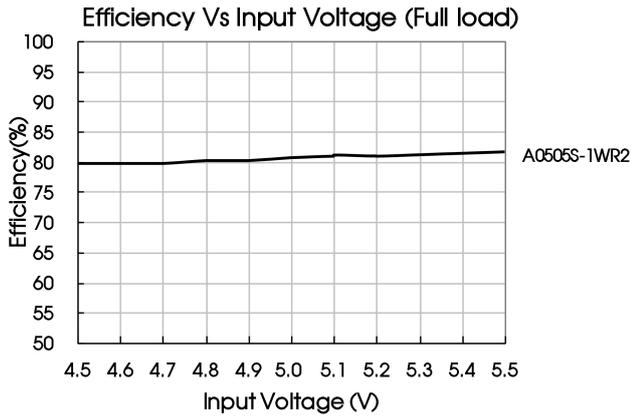

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

Dual



Single



Fig.3

Table 1: Recommended input and output capacitor values

| Vin (VDC) | Cin (μF) | Single Vout (VDC) | Cout (μF) | Dual Vout (VDC) | Cout (μF) |
|-----------|----------|-------------------|-----------|-----------------|-----------|
| 3.3/5 | 4.7 | 3.3/5 | 10 | ±3.3/±5 | 4.7 |
| 9/12 | 2.2 | 9/12 | 2.2 | ±9/±12 | 1 |
| 15 | 2.2 | 15/24 | 1 | ±15/±24 | 0.47 |
| 24 | 1 | -- | -- | -- | -- |

2. EMC (CLASS B) compliance circuit

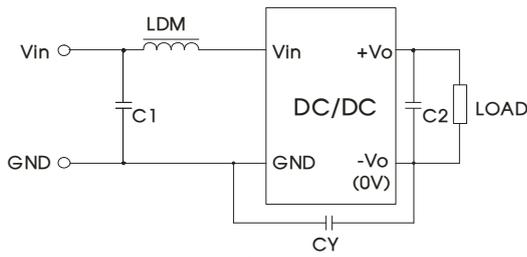


Fig. 4

| Input voltage (VDC) | | 3.3/5/9/12 | 15/24 |
|---------------------|-----|------------------------|---------|
| EMI | C1 | 4.7µF /50V | |
| | C2 | Refer to Cout in Fig.3 | |
| | CY | -- | 1nF/2kV |
| | LDM | 6.8µH | |


Note: For 15V/24V input models use a Y-capacitor CY of 1nF/2kV.

3. Minimum Output Load Requirement

For a reliable and efficient operation of the converter, the minimum load should never be less than 10% of the rated output load. If the total required output power is below 10%, a parallel bleeding resistor is required on the output, ensuring that the sum of the power consumption is always maintained at 10% minimum.

4. For additional information, please refer to DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

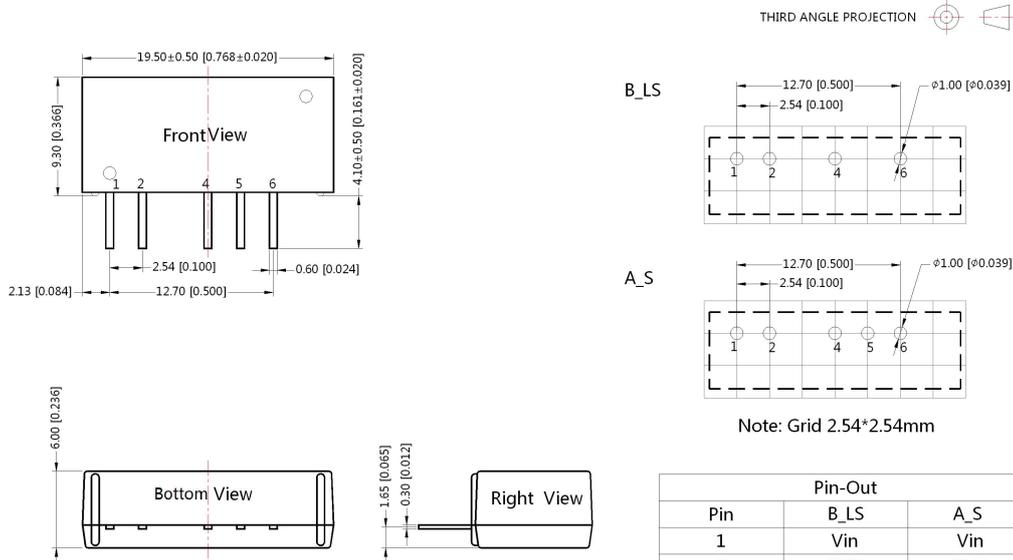

Note:
Unit: mm[inch]
Pin section tolerances: ±0.10[±0.004]
General tolerances: ±0.25[±0.010]

| Pin | Pin-Out | |
|-----|---------|-----|
| | B_LS | A_S |
| 1 | Vin | Vin |
| 2 | GND | GND |
| 4 | 0V | -Vo |
| 5 | No Pin | 0V |
| 6 | +Vo | +Vo |

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200029;
2. In order to guarantee product performance and datasheet compliance, the product must be operated within specifications and load range requirement;
3. The specified maximum capacitive load is tested under full load condition and over the input voltage range;
4. All parameters in this datasheet were measured under following conditions: Ta=25°C, relative humidity<75%RH, nominal input voltage and rated output load (unless otherwise specified);
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com