


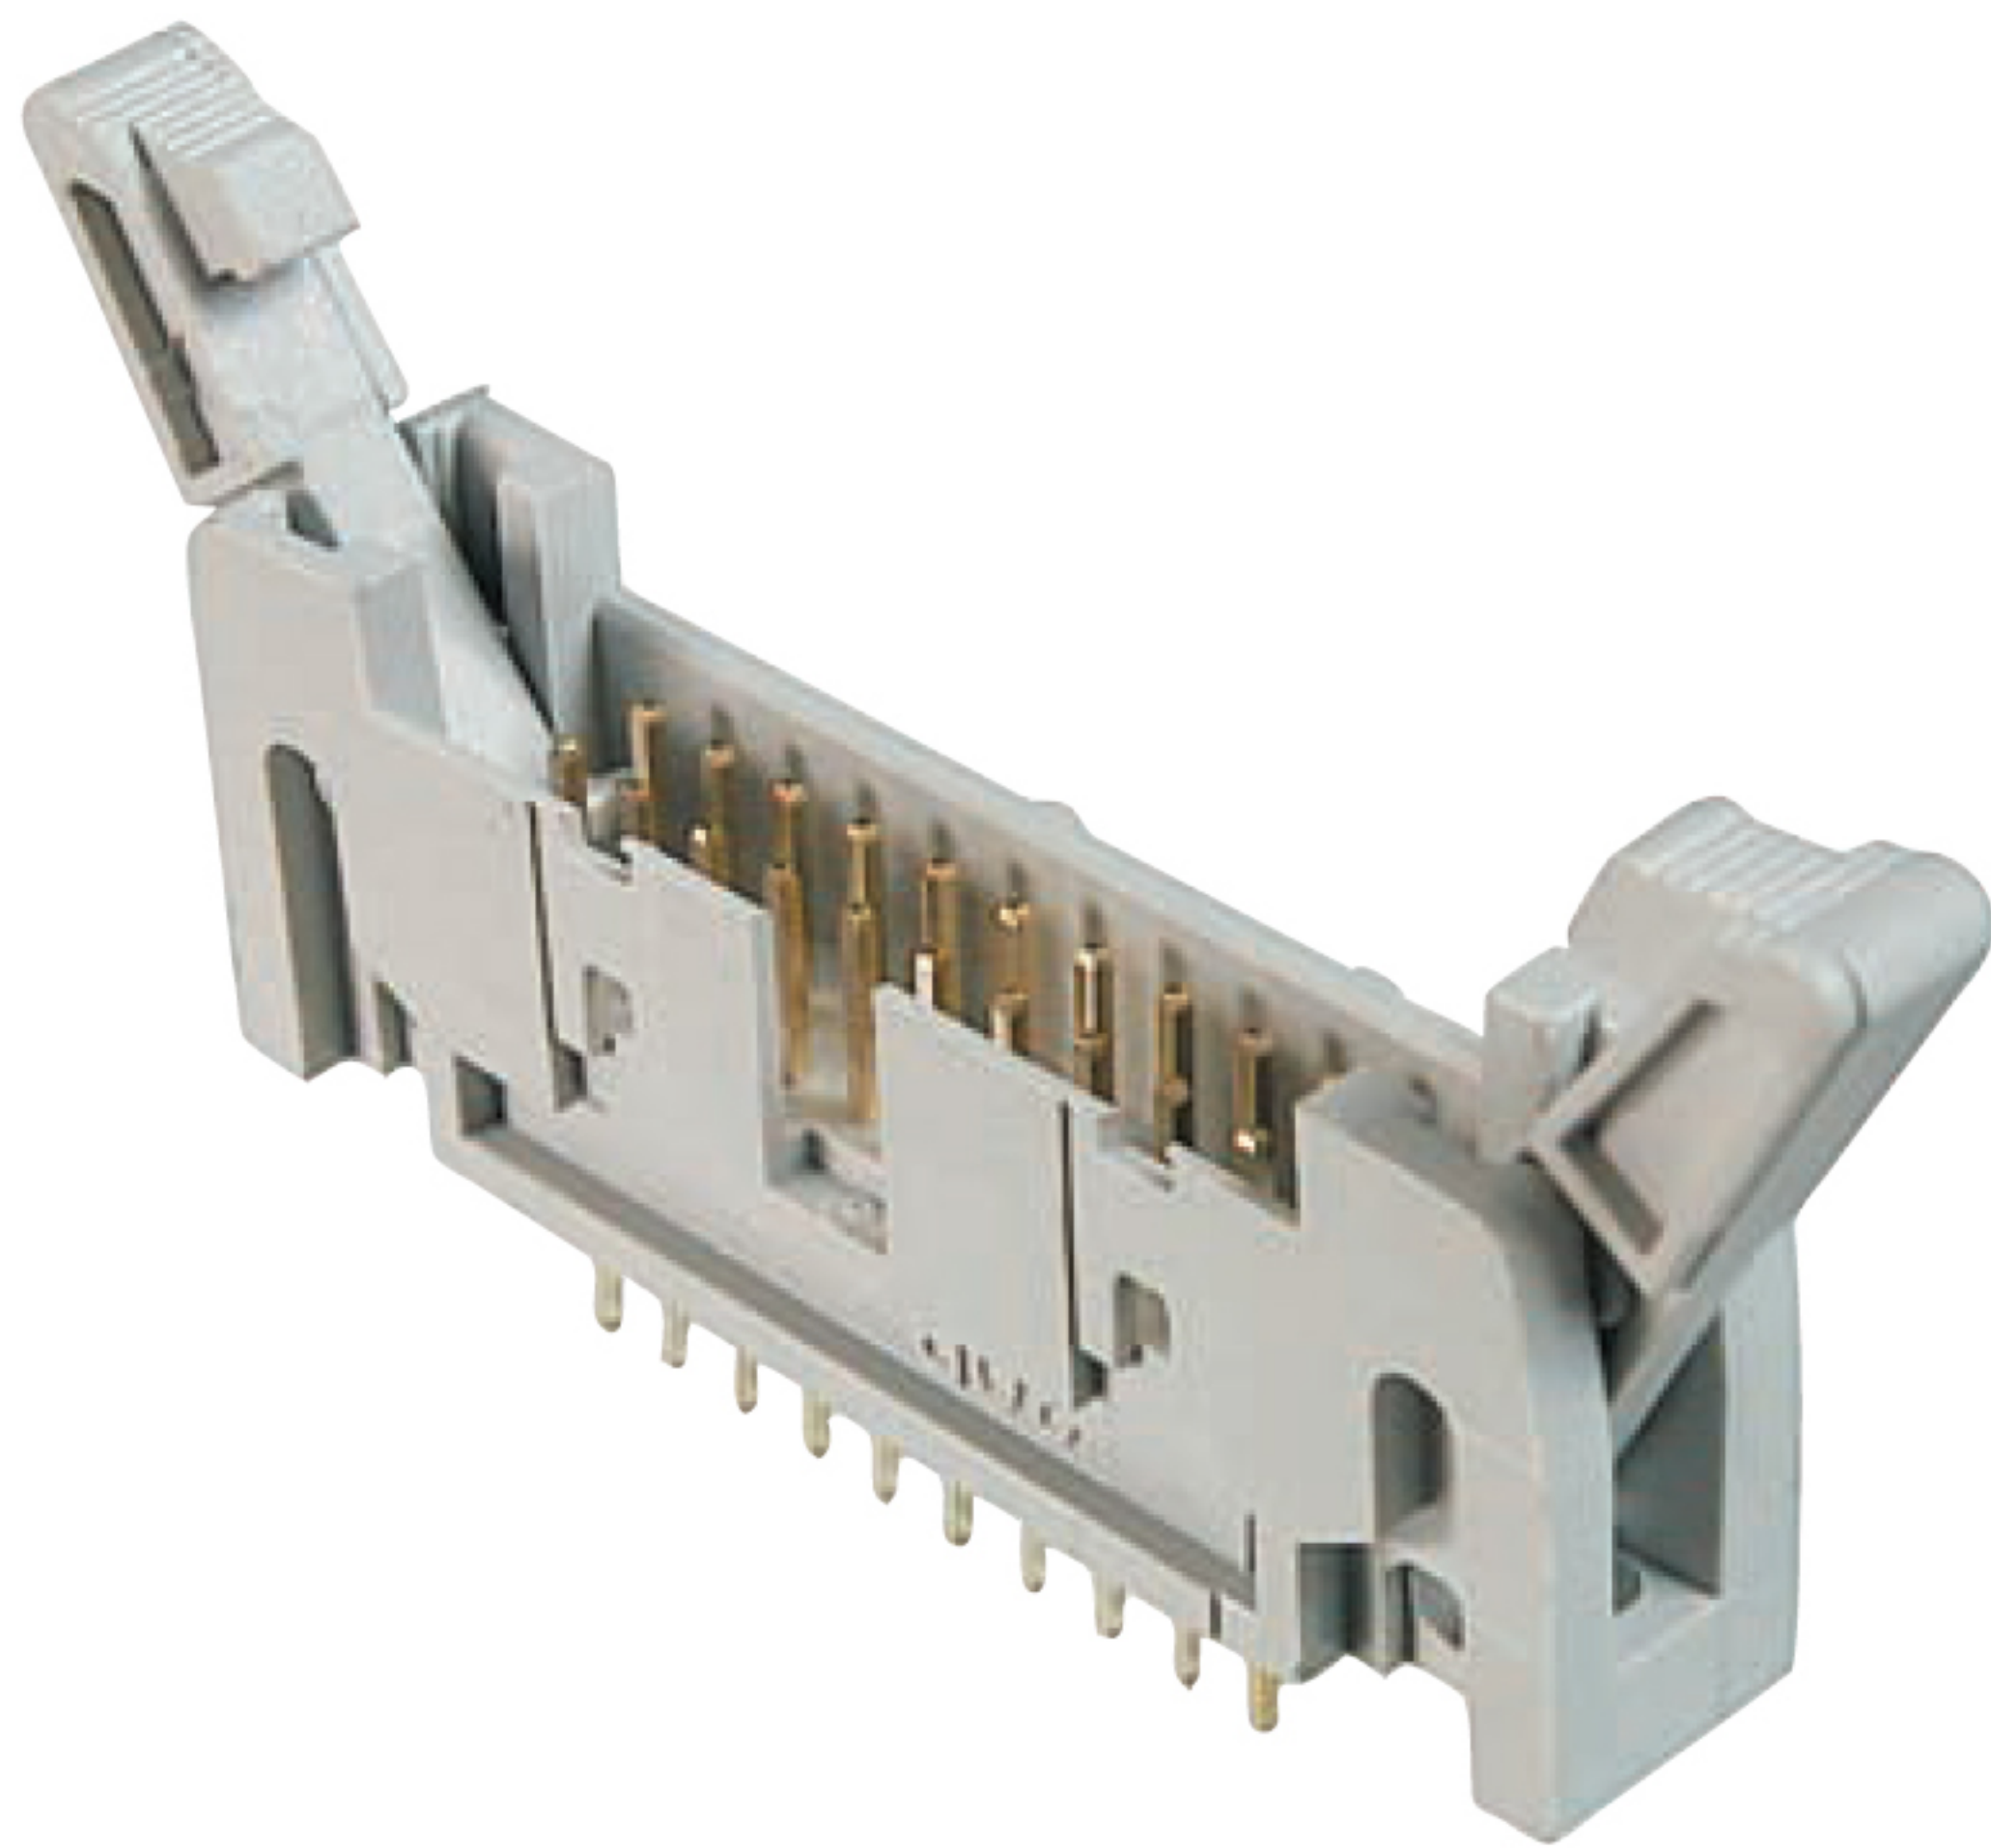

Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Messing

Kontaktoberfläche
Ni, Au / Sn

Kontaktwiderstand
20mΩ max

Isolationswiderstand
1000MΩ min

Strombelastbarkeit
3A

Betriebstemperatur
-40°C - +105°C

Betriebsspannung
250V AC

Prüfspannung
1000V AC

Verpackung
Blisterverpackung

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au / Sn

Contact resistance
20mΩ max

Insulation resistance
1000MΩ min

Current rating
3A




Operating temperature
-40°C to +105°C

Operating voltage
250V AC

Test voltage
1000V AC

Packing
Tray packing

Dimensions			
No. of Contacts	A	B	C
10	31,90	10,16	21,90
14	36,98	15,24	26,98
16	39,52	17,78	29,52
20	44,60	22,86	34,60
26	52,22	30,48	42,22
34	62,38	40,64	52,38
40	70,00	48,26	60,00
50	82,70	60,96	72,70
60	95,40	73,66	85,40
64	100,48	78,74	90,48

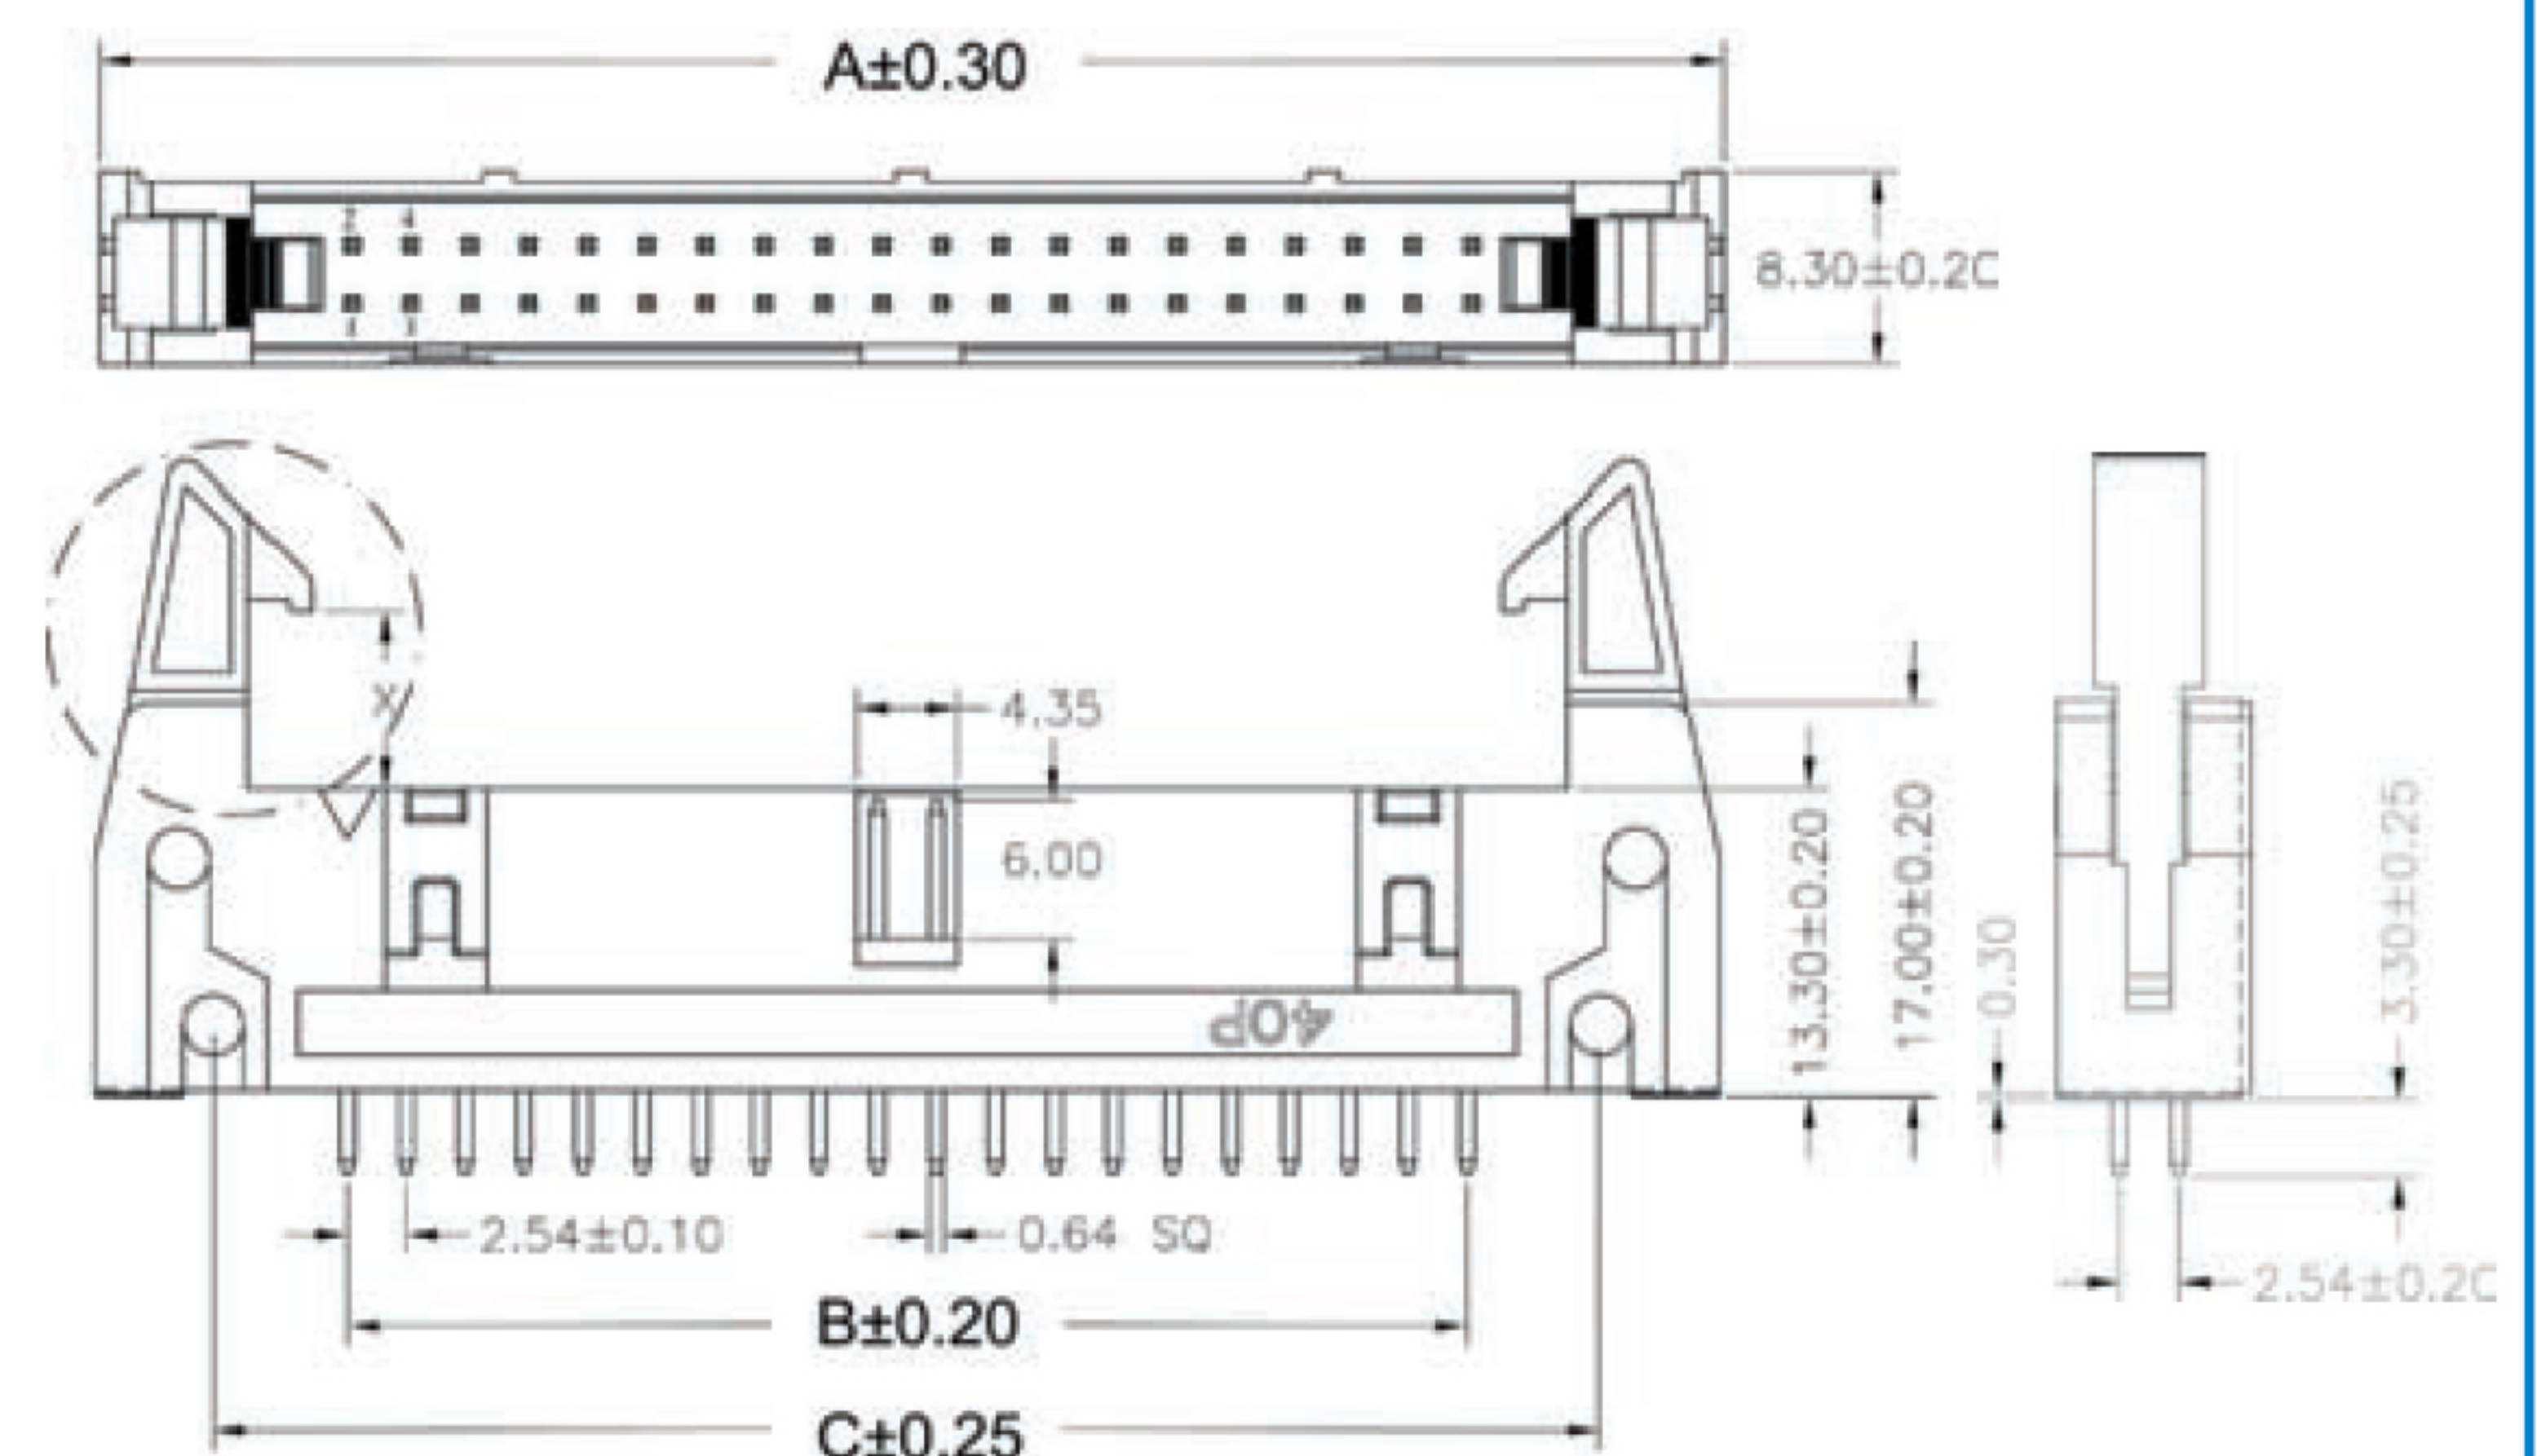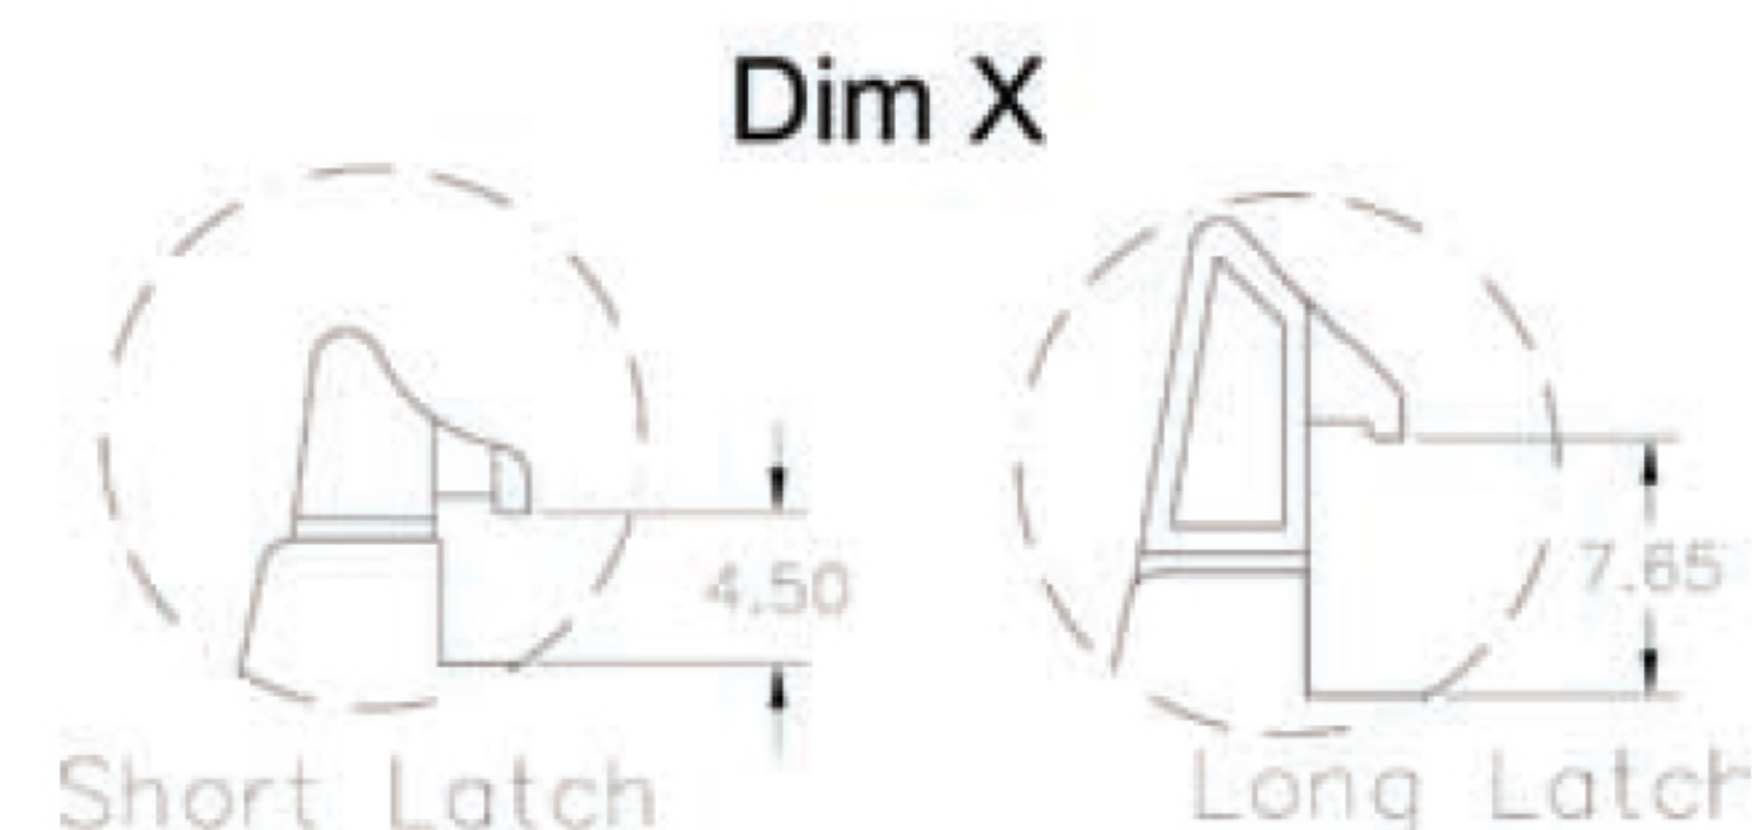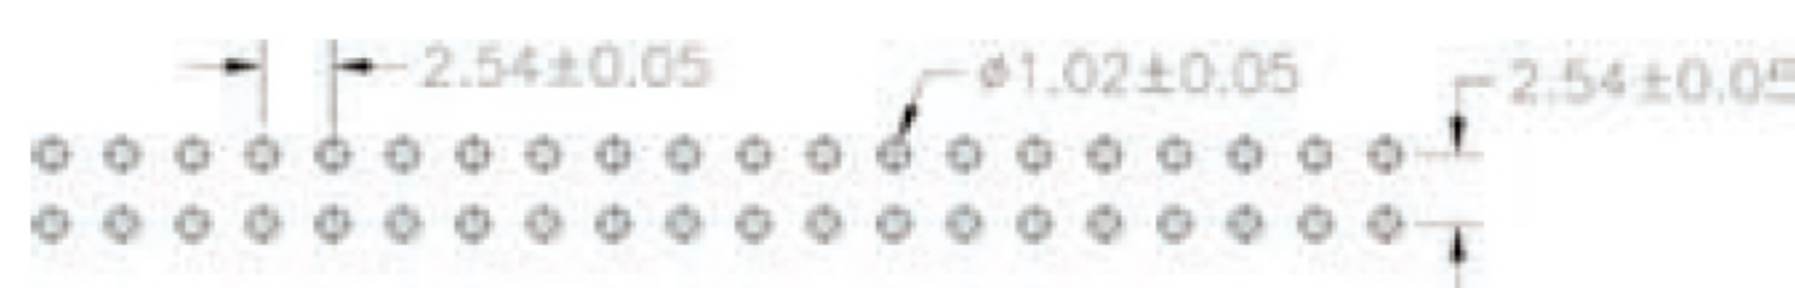

Bestellcode / Ordercode

Polzahl

10 / 14 / 16 / 20 /
26 / 34 / 40 / 50 / 60 / 64

Beschichtung

5 - vollverzinkt
2 - Au flash* (selektiv)

Verriegelungsclips

0 - ohne Verriegelungsclips*
2 - mit kurzen Verriegelungsclips
3 - mit langem Verriegelungsclips

No. of contacts

10 / 14 / 16 / 20 /
26 / 34 / 40 / 50 / 60 / 64

Plating*

5 - Tinned
2 - Au flash* (selective)

Latches

0 - without latches*
2 - with short latches
3 - with long latches

AWH xx G - 0 x x 2 - T

Verriegelungsclipse separat / Latches separate

AWHCLIP LONG (lang / long)

AWHCLIP XSHORT (kurz / short)

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option

* Standard