



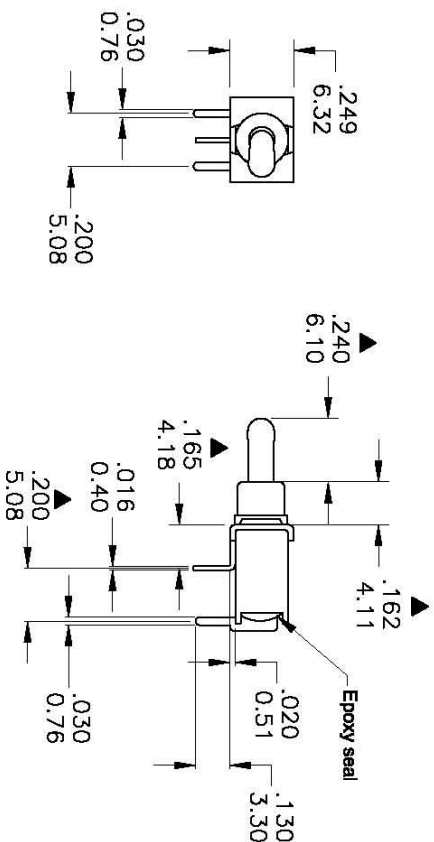

Model No.	POS.1	POS.2	POS.3
2AS4	MOM	OFF	MOM
Term. Comm.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION

P.C. MOUNTING

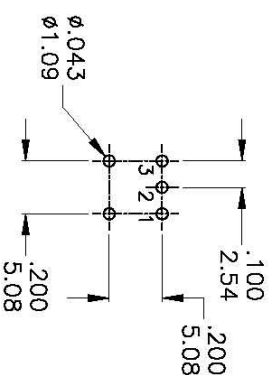

SPECIFICATIONS

MECHANICAL LIFE: 50,000 make-and-break cycles.
CONTACT RESISTANCE: 20m Ω max. Initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000M Ω min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE & BUSHING - Glass filled nylon 6/6, retardant, heat stabilized(UL94V-0)
ACTUATOR - Brass, chrome plated, Internal O-ring seal, standard for all actuators.
SWITCH SUPPORT - Brass , tin plated.
TERMINALS/CONTACT - Silver or gold plated copper.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 1Amp @250VAC
3Amps @120 VAC or 28 VDC

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2	TITLE	Sealed Sub - Miniature Toggle Switches	SIZE
1	(A)	破線圖面尺寸	AUG-03-2004	TOLERANCE (公差) : 0.00 mm $\pm$ 0.25mm 0.0 mm $\pm$ 0.40mm ANGULAR : $\pm$ 2.54 mm FILE NAME : 2ASPO034	DWG NO. 圖名	B070BTB	UNIT 單位
2	(B)				REV. 圖號		inch mm
3	(C)				CHECKED BY 審核	RICHARD	
4	(D)				DATE 日期	MAY - 06 - 2002	SHEET 張數
5	(E)				DRAWN BY 製圖	ERIN	1 of 1