

SLOAN AG

Birmannsgasse 8
CH-4009 Basel
Tel. ++41 61 264 10 60
Fax. ++41 61 261 10 75
info@sloan-basel.com



BA9S



Based 8mm LED's

Easy replacement of filament bulbs

Part No:	Base	Emitted color	Electro-optical-characteristics Ta=25C°IF=20mA						Lens Colour	Storage Temperature [C°]	Operating Temperature [C°]
			Dom. Wave- length	Luminous Intensity [mcd]		Viewing angle 2Θ1/2	Voltage Vi[V]				
				min.	max.		typ.	max.			
BA9S-GQB9B	BA9S	green	525	2000	3000	30°	12.0	13.0	water clear	-30~+100	-30~+80
BA9S-RHB9B		red	625	1500	2000	30°	12.0	13.0		-30~+100	-30~+80
BA9S-YHB9B		yellow	590	1200	1800	30°	12.0	13.0		-30~+100	-30~+80
BA9S-W7B9B		white	x=0.31 y=0.32	4500	6500	25°	12.0	13.0		-30~+90	-20~+80

BA9S-GQB9D	BA9S	green	525	2000	3000	30°	24.0	26.0	water clear	-30~+100	-30~+80
BA9S-RHB9D		red	625	1500	2000	30°	24.0	28.0		-30~+100	-30~+80
BA9S-YHB9D		yellow	590	1200	1800	30°	24.0	28.0		-30~+100	-30~+80
BA9S-W7B9D		white	x=0.31 y=0.32	4500	6500	25°	24.0	28.0		-30~+90	-20~+80

Package Dimensions

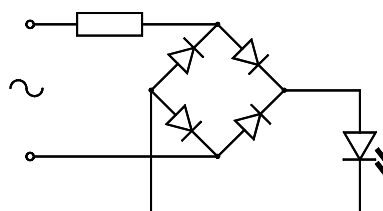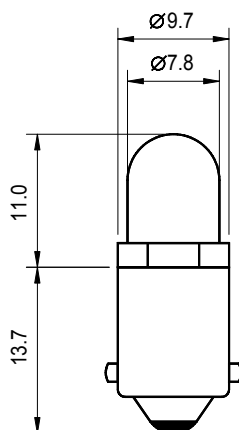

Bridge Rectifier for Bi-Polarity

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.2\text{mm}$ unless otherwise specified.
3. Specifications are subject to change without notice