
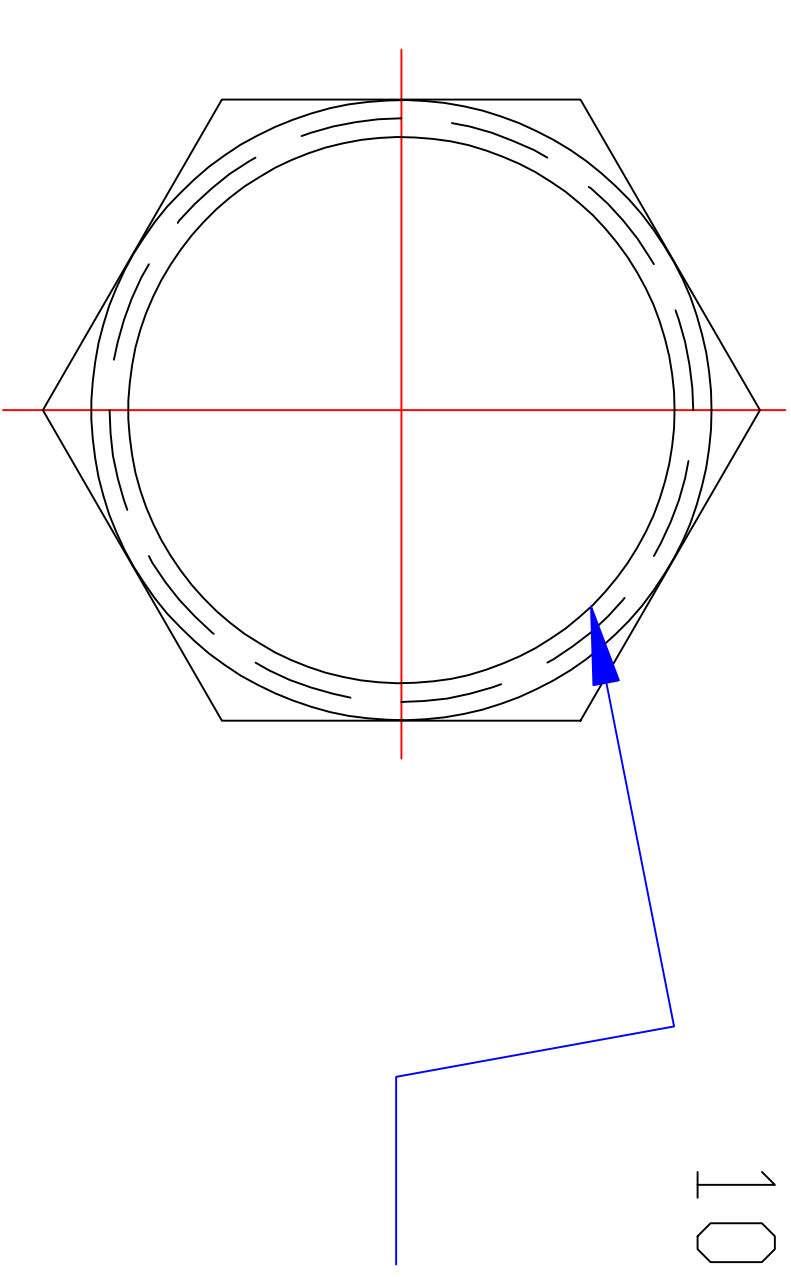
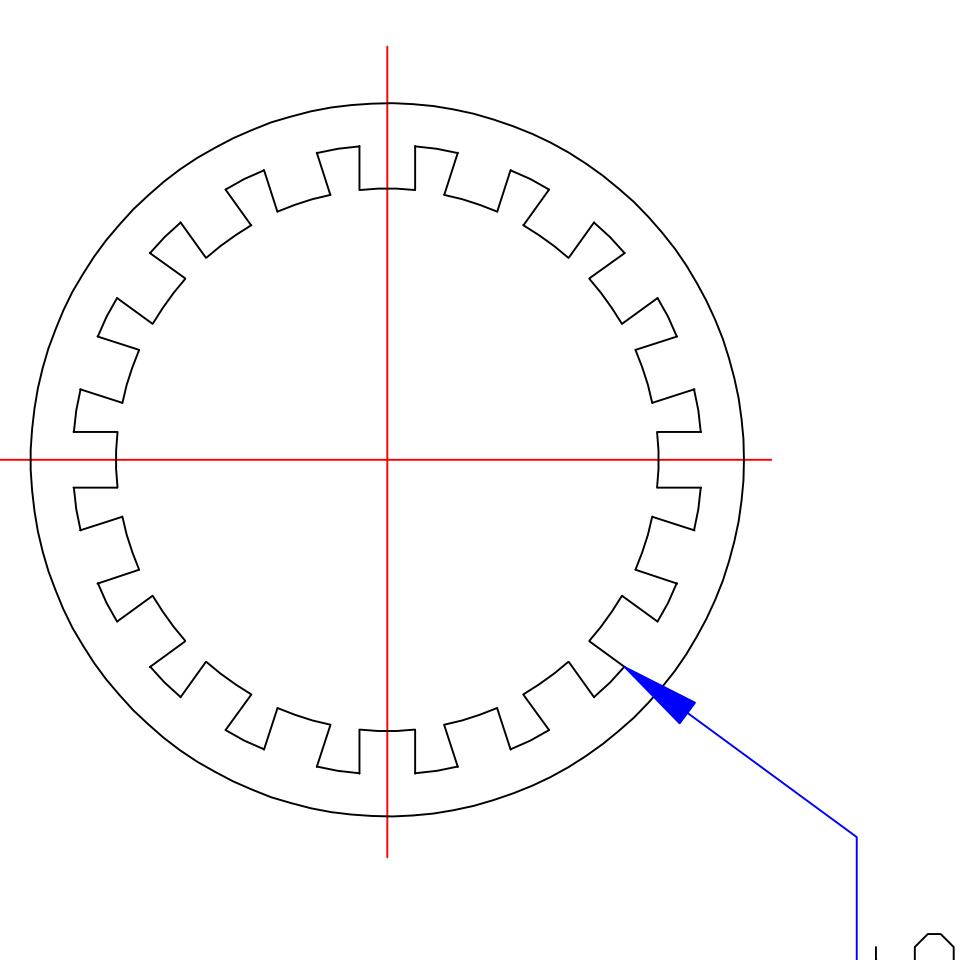
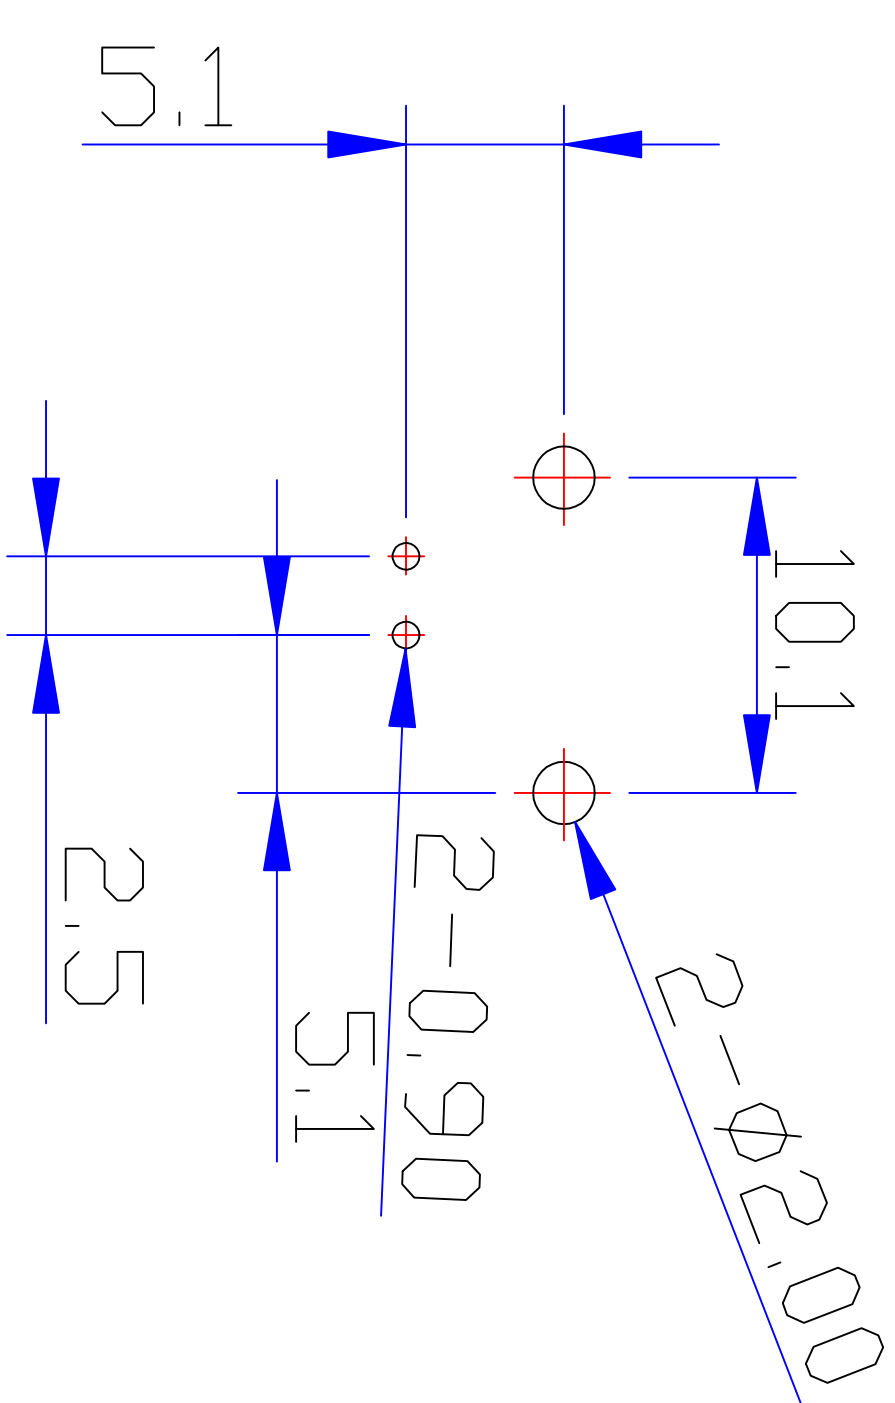
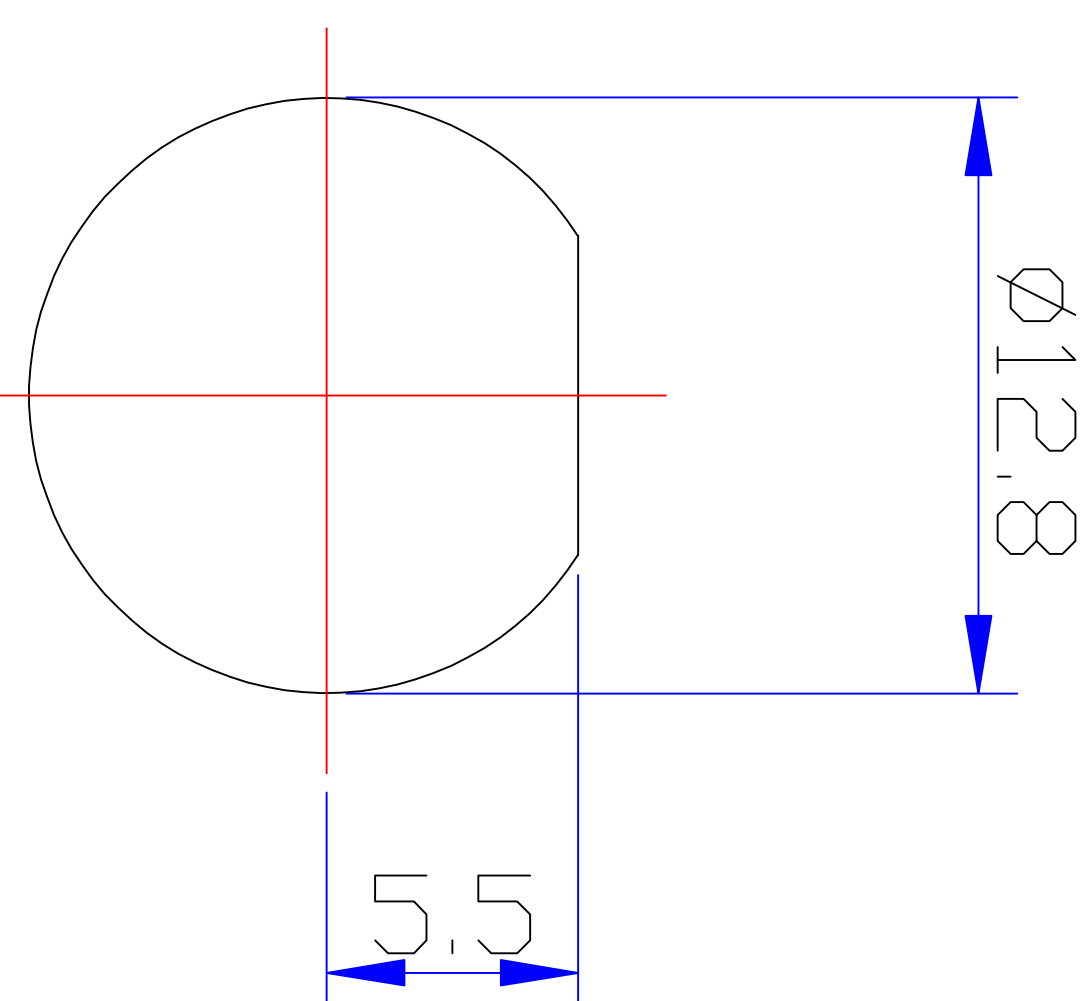
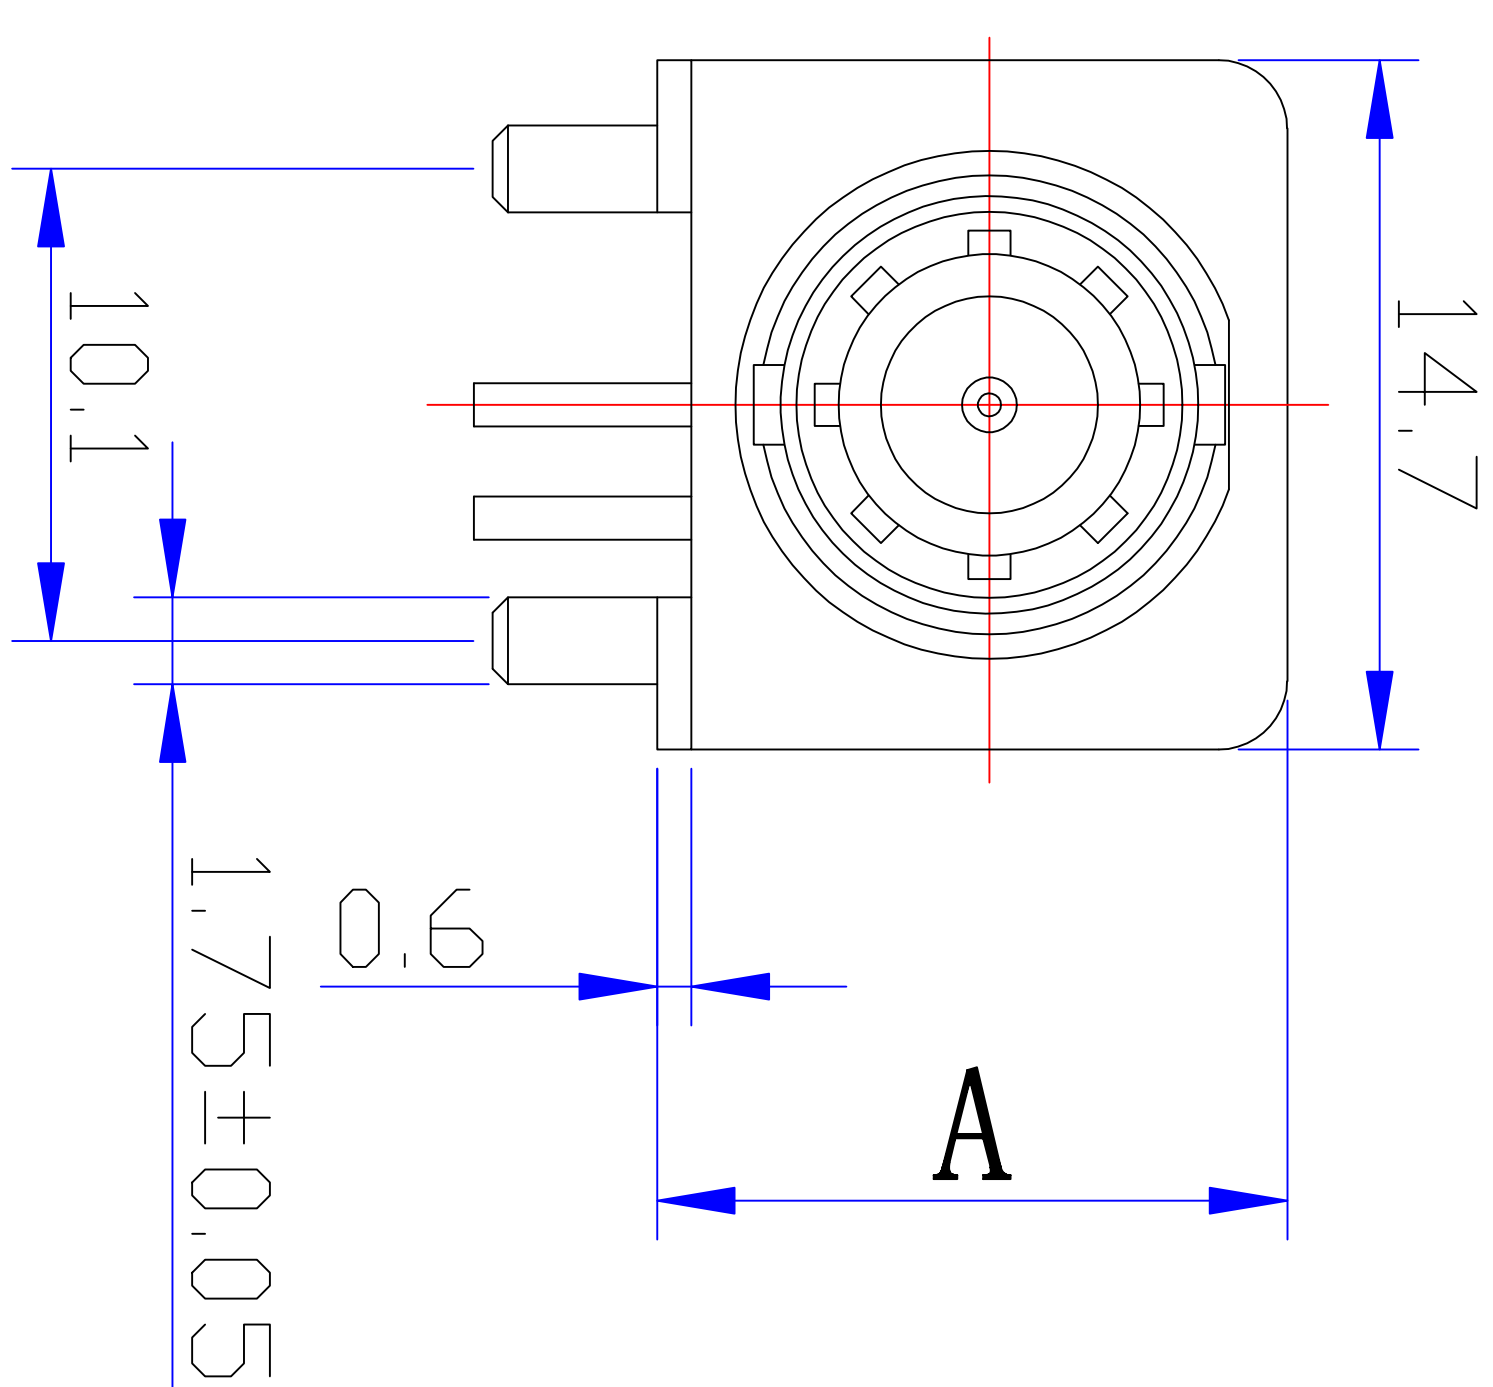
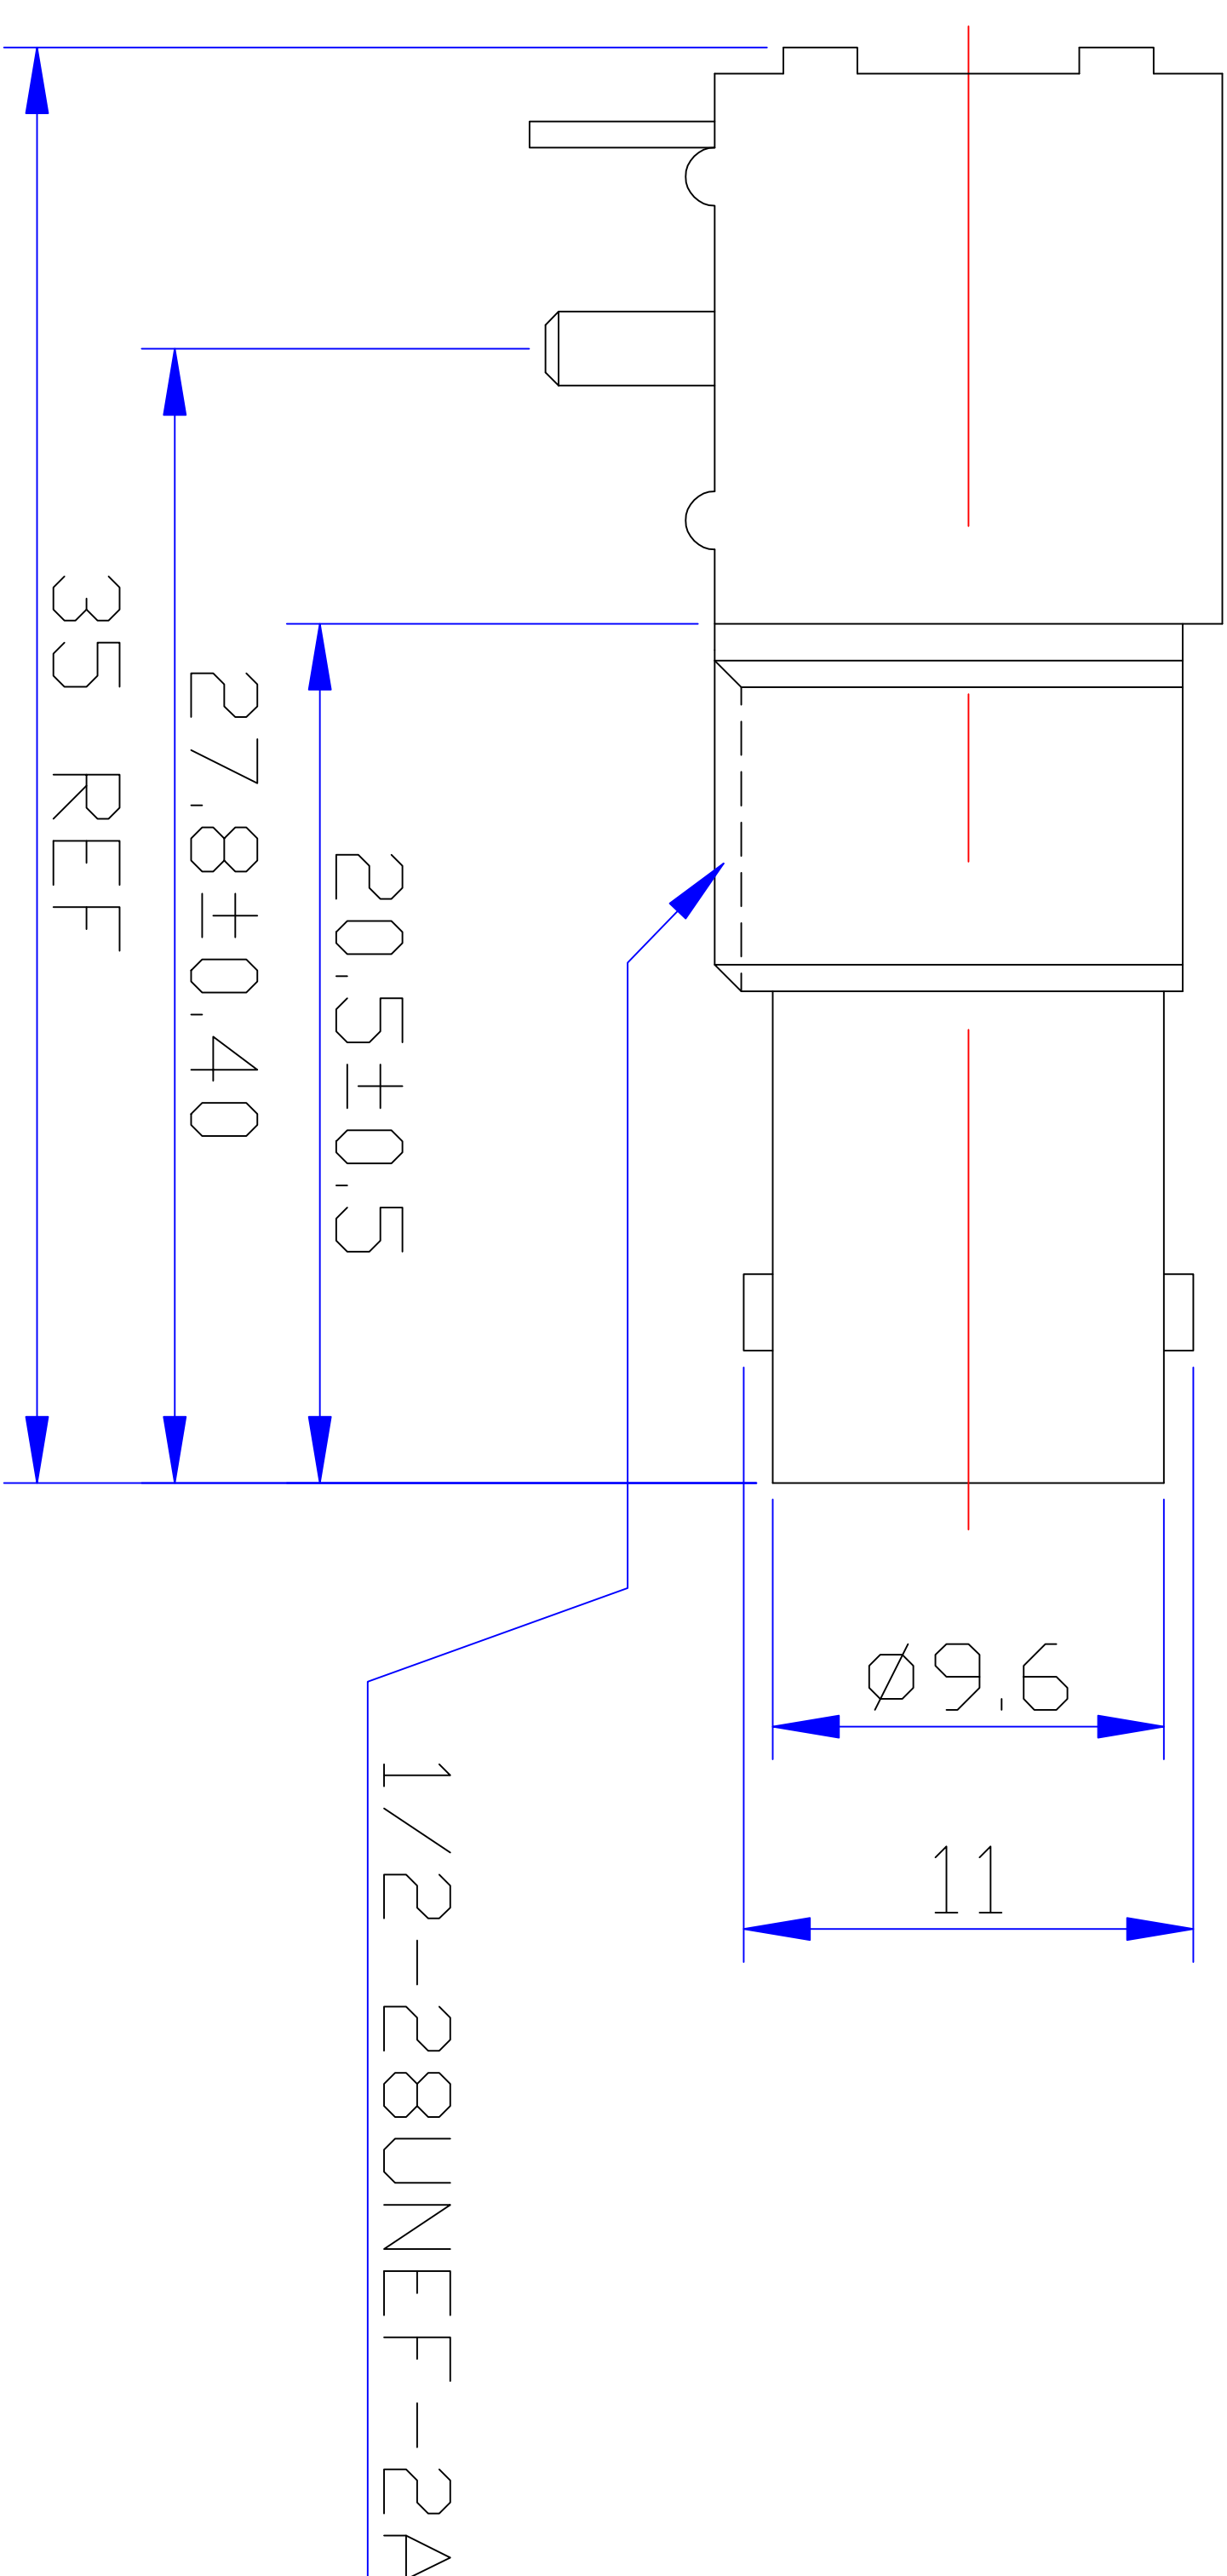


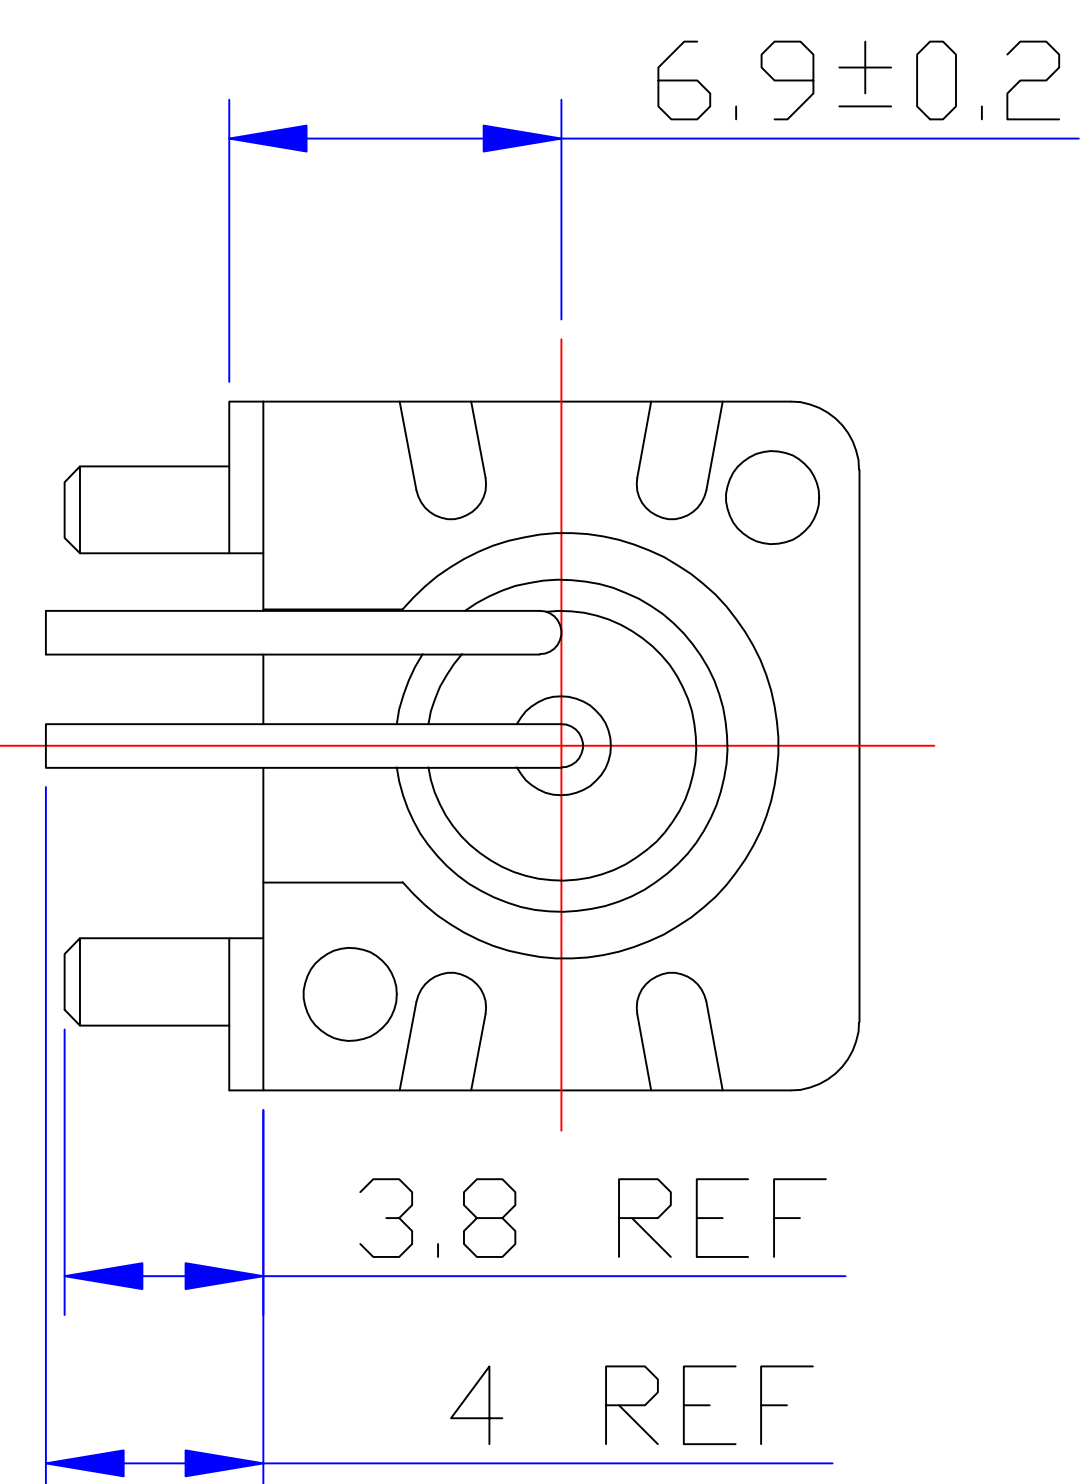

Specification:

Impedance: 50 Ohms

VSWR: 1.3MAX

Frequency range: DC~4G

Working Voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO $+155^{\circ}\text{C}$

Relative temperature: $\leq 95\%$ ($40^\circ\text{C} \pm 2^\circ\text{C}$)

Drawings products are in line with ROHS standards.

A	DWG NO.	Impedance	Colour
11.1	BNC-7044-W-001	50/75 Ohm	White
13.1	BNC-7044-W-002	50/75 Ohm	White
15.8	BNC-7044-W-003	50/75 Ohm	White

深圳市泰华电子有限公司 Shenzhen Taihua Electronic Co., Ltd																						
Name: BNC 白胶视频连接器																						
1		Body	Zinc	NI:80-120u"	Tolerance				X.		±0.15	SIZE A		Product NO. BNC-7044-W-001/002/003		REV B						
2		Center contact	Brass	AU:1u"					X.X		±0.10											
3		Lead	Iron	AU:1u"					X.XX		±0.05											
4		Fixed footrest	Iron	NI:80-120u"					Angular		±5°											
5		Insulator	POM	White																		
6		Fixed mount	PBT	White					View		UNIT		MM		SCALE		1:1					
7		Washer	Brass	NI:80-120u"																		
8		Hex nut	Brass	NI:80-120u"																		
9																						
10																						
NO		Component Number	Material	Finish	APPROVALS				13/04.2012		2012/04/13		DateTime		2012/04/13		CAD FILE		D/company drawings/BD		SHEET: 1 OF 1	
A			B		C				D		E		F		G							
					DRAWN				2012/04/13		Zel in. Zhang		CHECKED		Jadu Kime							