



Data sheet: BV EI 422 1225

Frame size/Core height	Output (ta 70B)	h 1 (mm)	h 2 (mm)	weight kg
EI 422 / 14,8 mm	6 VA	26,4	32,3	0,200


- non short-circuit-proof at temperature class ta 70 °C/B
- excellent temperature fluctuation resistance properties
- Test certifications to ENEC 10-, VDE- and UL-regulations
- maximum safety and long-term durability
- minimum size, maximum capacity
- self-extinguishing cast housing and sealing material
- individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
EI 422 1225	6	230	1-5	2x12 V 250 mA	6-7/9-10	20,2/20,2

Certificates



Type "K" cast housing with 2 fixing straps

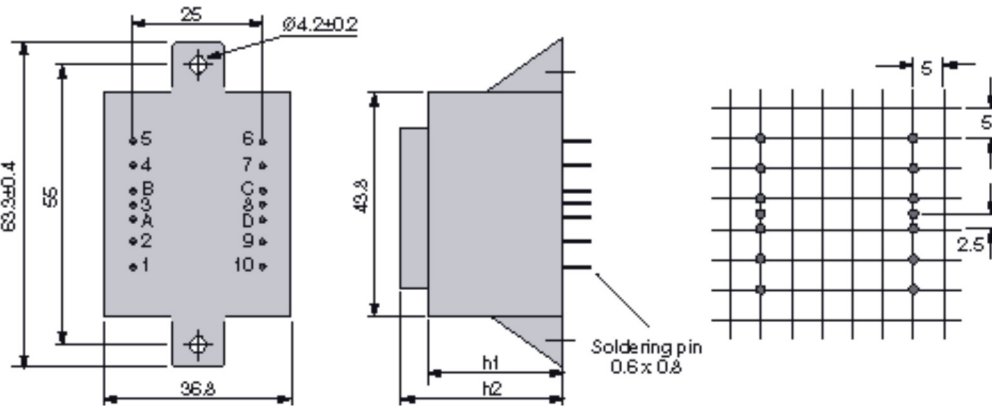

Dimensions of drawing without tolerances ± 0,3 mm. soldering pins 0,6 x 0,8 mm