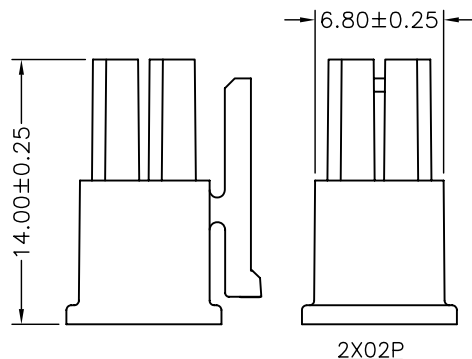



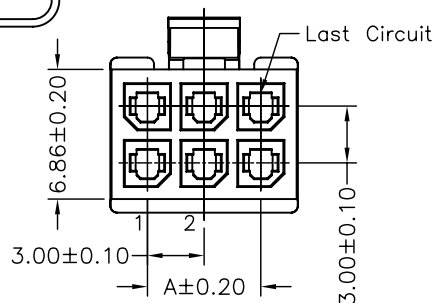


Ordering code

C3030 HF-2XNP N X X NP N 00 G
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Connector type: HF=Receptacle
- ③ No. of circuits
- ④ N=Halogen Free
- ⑤ Material: 0=Nylon 66-V0
- ⑥ Color: B=Black W=White
- ⑦ Plating code for contacts: NP=Non-plating
- ⑧ Plating code for solder tabs: N=Non-plating
- ⑨ Option code: 00=Standard
- ⑩ Packing code: G=Bag

SPECIFICATIONS

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66
Color: Black or White

Circuit No.	Dimensions	
	A	B
2X01P	---	3.80
2X02P	3.00	6.80
2X03P	6.00	9.80
2X04P	9.00	12.80
2X05P	12.00	15.80
2X06P	15.00	18.80
2X07P	18.00	21.80
2X08P	21.00	24.80
2X09P	24.00	27.80
2X10P	27.00	30.80
2X11P	30.00	33.80
2X12P	33.00	36.80



燦達電子工業股份有限公司
JOINT TECH ELECTRONIC IND. CO., LTD.

UNIT: mm
SCALE: 1:1
SHEET: 1 of 1
DRAWN BY: 陳敏
2009.12.16
APPROVED BY: 董正一
2009.12.16

GENERAL TOLERANCE
X.X±0.25
X.XX±0.15
X.XXX±0.05

TITLE:
3.00mm PITCH
HOUSING-RECEPTACLE,
MICRO-FIT

DRAW NO.: C3030HF-2XNPXXXXXXX
REV. A2