
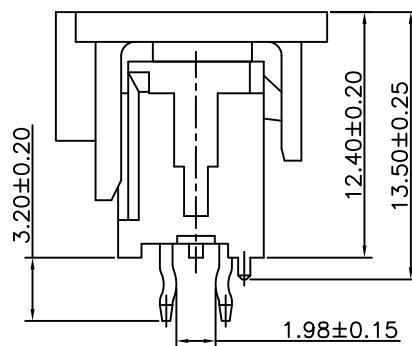
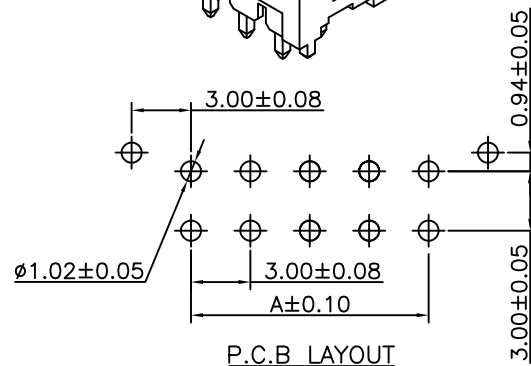

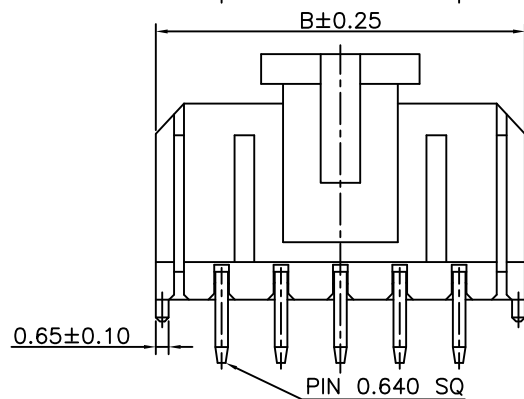


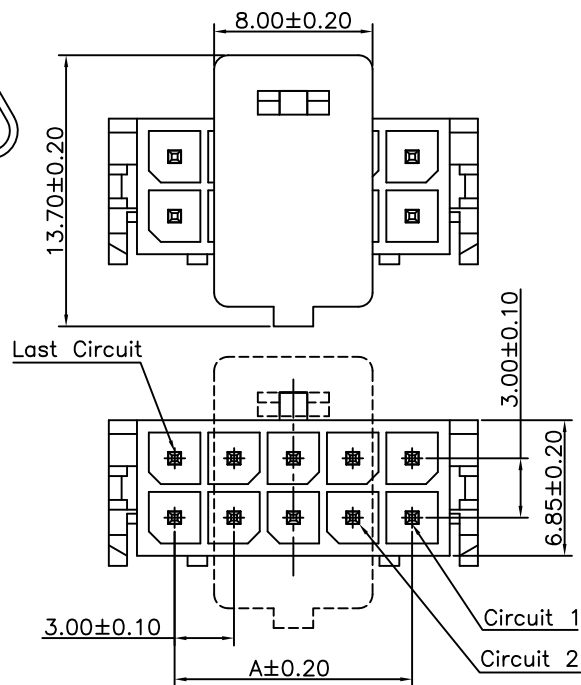

Ordering code

C3030 WV-F-2XNP N L B T1 N 00 L
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪
① Series No.
② Connector type: WV=Vertical
③ Mounting type: F=With foot
④ No. of circuits
⑤ N=Halogen Free
⑥ Material: L=LCP
⑦ Color: B=Black
⑧ Plating code for contacts: T1=Tin-plated
⑨ Plating code for solder tabs: N=Non-plating
⑩ Option code: 00=Standard
⑪ Packing code: L=Tape & Reel(With cap or Mylar)

SPECIFICATIONS

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: LCP,UL94V-0
Color: Black

Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2X01P	---	6.65	2X07P	18.00	24.65
2X02P	3.00	9.65	2X08P	21.00	27.65
2X03P	6.00	12.65	2X09P	24.00	30.65
2X04P	9.00	15.65	2X10P	27.00	33.65
2X05P	12.00	18.65	2X11P	30.00	36.65
2X06P	15.00	21.65	2X12P	33.00	39.65



燦達電子工業股份有限公司
JOINT TECH ELECTRONIC IND. CO., LTD.

UNIT	SCALE	SHEET
mm	1 : 1	1 of 1
DRAWN BY 王亮	APPROVED BY 翁志昇	
2013.09.17	2013.09.17	
GENERAL TOLERANCE		
X. X±0.25	ANGLE±	
X. XX±0.15		
X. XXX±0.05		

TITLE:

3.00mm PITCH 180° WAFER,
MICRO-FIT

DRAW NO.: C3030WV-F-2XNPXXXXXXX

REV.
A0