

SPECIFICATIONS

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 10m Ω Max



Insulation Resistance: 1000M Ω Min

Withstanding Voltage: 1500V AC/minute



Pin Material: Brass/Tin-plated

Material: PBT15%GF,UL94V-0

Color: Natural(Black)

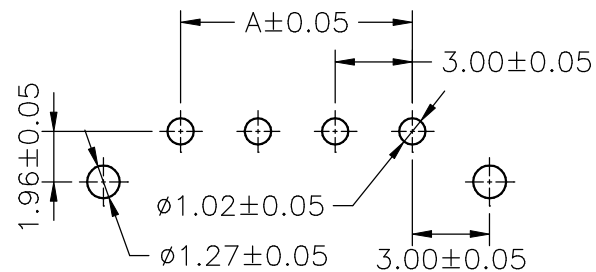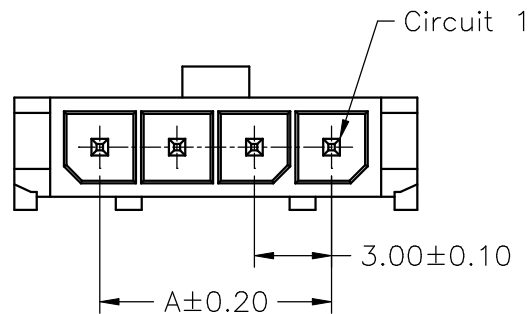

P.C.B. LAYOUT

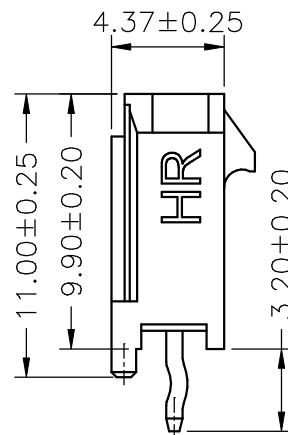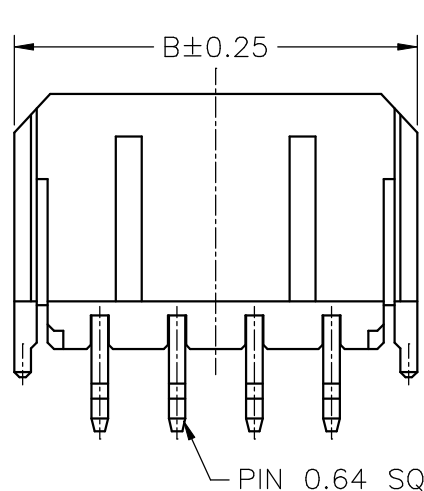

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C3030WV-F-2P	3.00	9.65
C3030WV-F-3P	6.00	12.65
C3030WV-F-4P	9.00	15.65
C3030WV-F-5P	12.00	18.65
C3030WV-F-6P	15.00	21.65
C3030WV-F-7P	18.00	24.65
C3030WV-F-8P	21.00	27.65
C3030WV-F-9P	24.00	30.65
C3030WV-F-10P	27.00	33.65
C3030WV-F-11P	30.00	36.65
C3030WV-F-12P	33.00	39.65

				JOINT TECH ELECTRONIC IND. CO., LTD.			
				JOY DAY INDUSTRIAL CO., LTD.			
				UNIT	SCALE	SHEET	TITLE: 3.00mm PITCH 180° WAFER, SINGLE ROW, MICRO-FIT
				mm		1 of 1	
			DRAWN BY	APPROVED BY			
			董正一	董正一			
			2003.03.27	2003.03.27			
			GENERAL TOLERANCE				
			X. X±0.25	ANGLE±			
			X. XX±0.15	D			
			X. XXX±0.05				
B0	NEW RELEASE	2005.12.14				DRAW NO. :	REV. B0
REV.	DESCRIPTION	DATE				C3030WV-F-XP	