
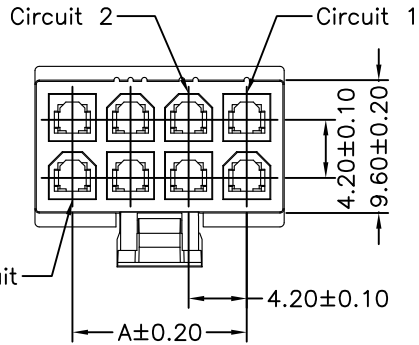





P/N LEGEND









①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
C4255	HF	-2XNP	N	X	X	NP	N	00	G
① Series No. ② Connector type: HF=Receptacle ③ No. of circuits ④ N=Halogen Free ⑤ Material: 0=Nylon 66-V0,2=Nylon 66-V2 ⑥ Color: W=White,N=Natural ⑦ Plating code: NP=Non-plating ⑧ Plating code: N=Non-plating ⑨ Option code: 00=standar ⑩ Packing code: G=Bag									

SPECIFICATIONS

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0
Color: White

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2X01P	---	5.70
2X02P	4.20	9.60
2X03P	8.40	13.80
2X04P	12.60	18.00
2X05P	16.80	22.20
2X06P	21.00	26.40
2X07P	25.20	30.60
2X08P	29.40	34.80
2X09P	33.60	39.00
2X10P	37.80	43.20
2X11P	42.00	47.40
2X12P	46.20	51.60



2X01P

2X02P



燦達電子工業股份有限公司
JOINT TECH ELECTRONIC IND. CO., LTD.

UNIT SCALE SHEET
mm 1 : 1 1 of 1

DRAWN BY
劉包根
2013.08.23

APPROVED BY
張子波
2013.08.23

GENERAL TOLERANCE

X. X±0.25
X. XX±0.15
X. XXX±0.05

ANGLE±
D

TITLE:

4.20mm PITCH
HOUSING-Receptacle,
MINI-FIT

DRAW NO.:
C4255HF-2XNPXXXXXXX

REV.
A2

A2	EN1308230297	2013.8.23	劉包根
REV.	DESCRIPTION	DATE	NAME