

## High Speed CMOS Logic Hex Buffer/Line Driver, Three-State Non-Inverting and Inverting

### Features

- Buffered Inputs
- High Current Bus Driver Outputs
- Typical Propagation Delay  $t_{PLH}$ ,  $t_{PHL} = 8\text{ns}$  at  $V_{CC} = 5\text{V}$ ,  $C_L = 15\text{pF}$ ,  $T_A = 25^\circ\text{C}$
- Fanout (Over Temperature Range)
  - Standard Outputs . . . . . 10 LSTTL Loads
  - Bus Driver Outputs . . . . . 15 LSTTL Loads
- Wide Operating Temperature Range . . .  $-55^\circ\text{C}$  to  $125^\circ\text{C}$
- Balanced Propagation Delay and Transition Times
- Significant Power Reduction Compared to LSTTL Logic ICs
- HC Types
  - 2V to 6V Operation
  - High Noise Immunity:  $N_{IL} = 30\%$ ,  $N_{IH} = 30\%$  of  $V_{CC}$  at  $V_{CC} = 5\text{V}$
- HCT Types
  - 4.5V to 5.5V Operation
  - Direct LSTTL Input Logic Compatibility,  $V_{IL} = 0.8\text{V}$  (Max),  $V_{IH} = 2\text{V}$  (Min)
  - CMOS Input Compatibility,  $I_I \leq 1\mu\text{A}$  at  $V_{OL}$ ,  $V_{OH}$

### Description

The 'HC365, 'HCT365, and 'HC366 silicon gate CMOS three-state buffers are general purpose high-speed non-inverting and inverting buffers. They have high drive current outputs which enable high speed operation even when driving large bus capacitances. These circuits possess the low power dissipation of CMOS circuitry, yet have speeds comparable to

low power Schottky TTL circuits. Both circuits are capable of driving up to 15 low power Schottky inputs.

The 'HC365 and 'HCT365 are non-inverting buffers, whereas the 'HC366 is an inverting buffer. These devices have two three-state control inputs ( $\overline{OE1}$  and  $\overline{OE2}$ ) which are NORed together to control all six gates.

The 'HCT365 logic families are speed, function and pin compatible with the standard LS logic family.


### Ordering Information

| PART NUMBER   | TEMP. RANGE (°C) | PACKAGE      |
|---------------|------------------|--------------|
| CD54HC365F3A  | -55 to 125       | 16 Ld CERDIP |
| CD54HC366F3A  | -55 to 125       | 16 Ld CERDIP |
| CD54HCT365F3A | -55 to 125       | 16 Ld CERDIP |
| CD74HC365E    | -55 to 125       | 16 Ld PDIP   |
| CD74HC365M    | -55 to 125       | 16 Ld SOIC   |
| CD74HC365MT   | -55 to 125       | 16 Ld SOIC   |
| CD74HC365M96  | -55 to 125       | 16 Ld SOIC   |
| CD74HC366E    | -55 to 125       | 16 Ld PDIP   |
| CD74HC366M    | -55 to 125       | 16 Ld SOIC   |
| CD74HC366M96  | -55 to 125       | 16 Ld SOIC   |
| CD74HCT365E   | -55 to 125       | 16 Ld PDIP   |
| CD74HCT365M   | -55 to 125       | 16 Ld SOIC   |
| CD74HCT365MT  | -55 to 125       | 16 Ld SOIC   |
| CD74HCT365M96 | -55 to 125       | 16 Ld SOIC   |

NOTE: When ordering, use the entire part number. The suffix 96 denotes tape and reel. The suffix T denotes a small-quantity reel of 250.


### Pinout

CD54HC365, CD54HCT365, CD54HC366  
(CERDIP)  
CD74HC365, CD74HCT365, CD74HC366  
(PDIP, SOIC)  
TOP VIEW

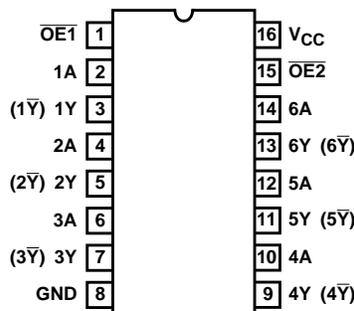


**Functional Diagrams**

HC365, HCT365

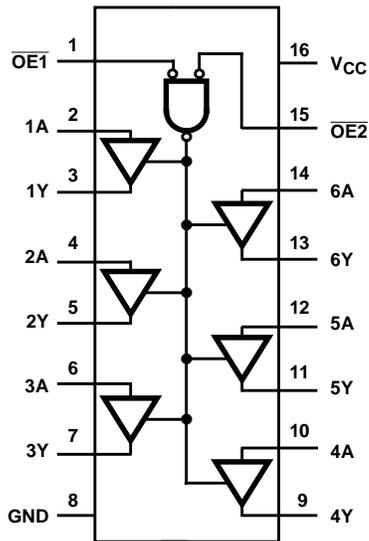

HC366

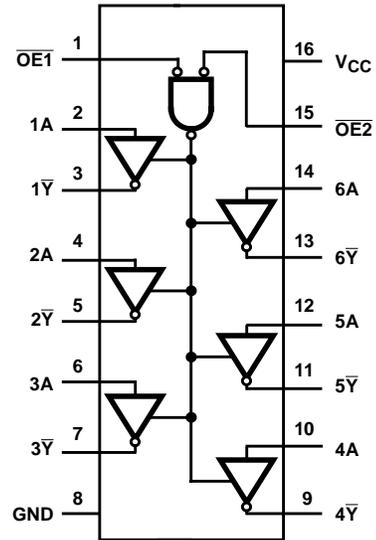


TRUTH TABLE

| INPUTS |     |   | OUTPUTS (Y) |       |
|--------|-----|---|-------------|-------|
| OE1    | OE2 | A | HC/HCT365   | HC366 |
| L      | L   | L | L           | H     |
| L      | L   | H | H           | L     |
| X      | H   | X | Z           | Z     |
| H      | X   | X | Z           | Z     |

NOTE:  
 H = High Voltage Level  
 L = Low Voltage Level  
 X = Don't Care  
 Z = High Impedance (OFF) State

Logic Diagram

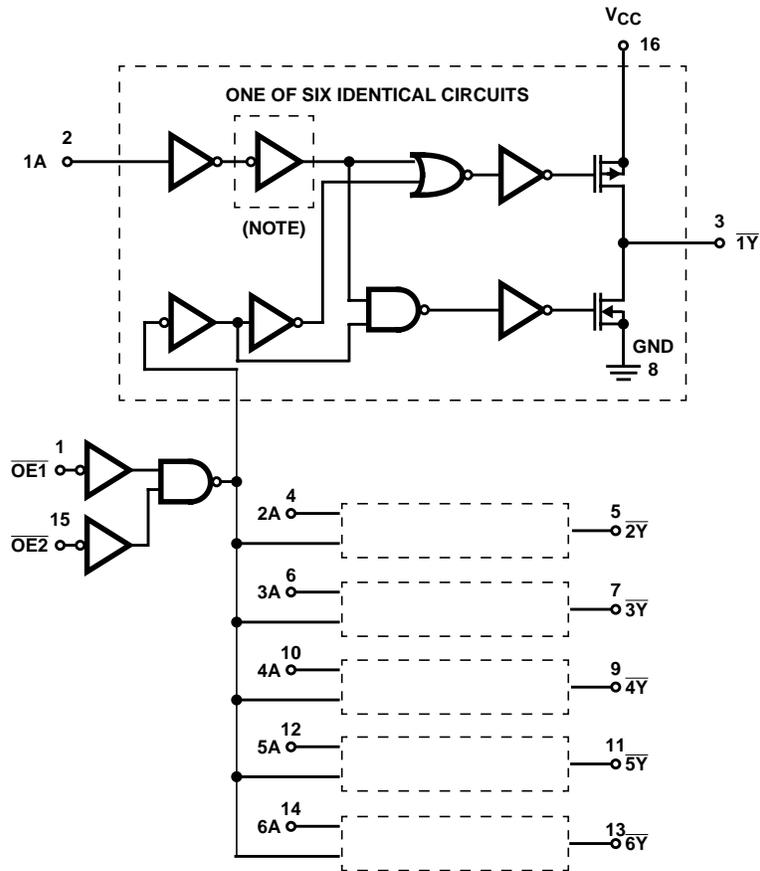

NOTE: Inverter not included in HC/HCT365.

FIGURE 1. LOGIC DIAGRAM FOR THE HC/HCT365 AND HC366 (OUTPUTS FOR HC/HCT365 ARE COMPLEMENTS OF THOSE SHOWN, i.e., 1Y, 2Y, ETC.)

## CD54/74HC365, CD54/74HCT365, CD54/74HC366

### Absolute Maximum Ratings

|  |             |
|--|-------------|
| DC Supply Voltage, $V_{CC}$ .....                      | -0.5V to 7V |
| DC Input Diode Current, $I_{IK}$                       |             |
| For $V_I < -0.5V$ or $V_I > V_{CC} + 0.5V$ .....       | $\pm 20mA$  |
| DC Output Diode Current, $I_{OK}$                      |             |
| For $V_O < -0.5V$ or $V_O > V_{CC} + 0.5V$ .....       | $\pm 20mA$  |
| DC Drain Current, per Output, $I_O$                    |             |
| For $-0.5V < V_O < V_{CC} + 0.5V$ .....                | $\pm 35mA$  |
| DC Output Source or Sink Current per Output Pin, $I_O$ |             |
| For $V_O > -0.5V$ or $V_O < V_{CC} + 0.5V$ .....       | $\pm 25mA$  |
| DC $V_{CC}$ or Ground Current, $I_{CC}$ .....          | $\pm 50mA$  |

### Thermal Information

|  |  |
|--|--|
| Thermal Resistance (Typical, Note 1)           | $\theta_{JA}$ ( $^{\circ}C/W$ )            |
| E (PDIP) Package .....                         | 67   |
| M (SOIC) Package .....                         | 73   |
| Maximum Junction Temperature .....             | 150 $^{\circ}C$                            |
| Maximum Storage Temperature Range .....        | -65 $^{\circ}C$ to 150 $^{\circ}C$         |
| Maximum Lead Temperature (Soldering 10s) ..... | 300 $^{\circ}C$<br>(SOIC - Lead Tips Only) |

### Operating Conditions

|  |                                    |
|--|------------------------------------|
| Temperature Range, $T_A$ .....               | -55 $^{\circ}C$ to 125 $^{\circ}C$ |
| Supply Voltage Range, $V_{CC}$               |                                    |
| HC Types .....                               | .2V to 6V                          |
| HCT Types .....                              | 4.5V to 5.5V                       |
| DC Input or Output Voltage, $V_I, V_O$ ..... | 0V to $V_{CC}$                     |
| Input Rise and Fall Time                     |                                    |
| 2V .....                                     | 1000ns (Max)                       |
| 4.5V .....                                   | 500ns (Max)                        |
| 6V .....                                     | 400ns (Max)                        |

*CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.*

#### NOTE:

1. The package thermal impedance is calculated in accordance with JESD 51-7.

### DC Electrical Specifications

| PARAMETER                               | SYMBOL   | TEST CONDITIONS         |            | $V_{CC}$ (V) | 25 $^{\circ}C$ |      |           | -40 $^{\circ}C$ TO 85 $^{\circ}C$ |         | -55 $^{\circ}C$ TO 125 $^{\circ}C$ |         | UNITS   |   |
|---|----------|-------------------------|------------|--------------|----------------|------|-----------|-----------------------------------|---------|------------------------------------|---------|---------|---|
|   |          | $V_I$ (V)               | $I_O$ (mA) |              | MIN            | TYP  | MAX       | MIN                               | MAX     | MIN                                | MAX     |         |   |
| <b>HC TYPES</b>                         |          |                         |            |              |                |      |           |                                   |         |                                    |         |         |   |
| High Level Input Voltage                | $V_{IH}$ | -                       | -          | 2            | 1.5            | -    | -         | 1.5                               | -       | 1.5                                | -       | V       |   |
|   |          |                         |            | 4.5          | 3.15           | -    | -         | 3.15                              | -       | 3.15                               | -       | V       |   |
|   |          |                         |            | 6            | 4.2            | -    | -         | 4.2                               | -       | 4.2                                | -       | V       |   |
| Low Level Input Voltage                 | $V_{IL}$ | -                       | -          | 2            | -              | -    | 0.5       | -                                 | 0.5     | -                                  | 0.5     | V       |   |
|   |          |                         |            | 4.5          | -              | -    | 1.35      | -                                 | 1.35    | -                                  | 1.35    | V       |   |
|   |          |                         |            | 6            | -              | -    | 1.8       | -                                 | 1.8     | -                                  | 1.8     | V       |   |
| High Level Output Voltage<br>CMOS Loads | $V_{OH}$ | $V_{IH}$ or<br>$V_{IL}$ | -0.02      | -0.02        | 2              | 1.9  | -         | -                                 | 1.9     | -                                  | 1.9     | -       | V |
|   |          |                         | -0.02      | -0.02        | 4.5            | 4.4  | -         | -                                 | 4.4     | -                                  | 4.4     | -       | V |
|   |          |                         | -0.02      | -0.02        | 6              | 5.9  | -         | -                                 | 5.9     | -                                  | 5.9     | -       | V |
|   |          |                         | -6         | -6           | 4.5            | 3.98 | -         | -                                 | 3.84    | -                                  | 3.7     | -       | V |
|   |          |                         | -7.8       | -7.8         | 6              | 5.48 | -         | -                                 | 5.34    | -                                  | 5.2     | -       | V |
| High Level Output Voltage<br>TTL Loads  | $V_{OH}$ | $V_{IH}$ or<br>$V_{IL}$ | -0.02      | -0.02        | 2              | -    | -         | 0.1                               | -       | 0.1                                | -       | 0.1     | V |
|   |          |                         | 0.02       | 0.02         | 4.5            | -    | -         | 0.1                               | -       | 0.1                                | -       | 0.1     | V |
|   |          |                         | 0.02       | 0.02         | 6              | -    | -         | 0.1                               | -       | 0.1                                | -       | 0.1     | V |
|   |          |                         | 6          | 6            | 4.5            | -    | -         | 0.26                              | -       | 0.33                               | -       | 0.4     | V |
|   |          |                         | 7.8        | 7.8          | 6              | -    | -         | 0.26                              | -       | 0.33                               | -       | 0.4     | V |
| Low Level Output Voltage<br>CMOS Loads  | $V_{OL}$ | $V_{IH}$ or<br>$V_{IL}$ | 0.02       | 0.02         | 2              | -    | -         | 0.1                               | -       | 0.1                                | -       | 0.1     | V |
| 0.02                                    |          |                         | 0.02       | 4.5          | -              | -    | 0.1       | -                                 | 0.1     | -                                  | 0.1     | V       |   |
| Low Level Output Voltage<br>TTL Loads   | $V_{OL}$ | $V_{IH}$ or<br>$V_{IL}$ | 6          | 6            | 4.5            | -    | -         | 0.26                              | -       | 0.33                               | -       | 0.4     | V |
|   |          |                         | 7.8        | 7.8          | 6              | -    | -         | 0.26                              | -       | 0.33                               | -       | 0.4     | V |
| Input Leakage Current                   | $I_I$    | $V_{CC}$ or<br>GND      | -          | 6            | -              | -    | $\pm 0.1$ | -                                 | $\pm 1$ | -                                  | $\pm 1$ | $\mu A$ |   |
| Quiescent Device Current                | $I_{CC}$ | $V_{CC}$ or<br>GND      | 0          | 6            | -              | -    | 8         | -                                 | 80      | -                                  | 160     | $\mu A$ |   |

**CD54/74HC365, CD54/74HCT365, CD54/74HC366**

**DC Electrical Specifications (Continued)**

| PARAMETER   | SYMBOL           | TEST CONDITIONS                    |   | V <sub>CC</sub> (V) | 25°C |     |      | -40°C TO 85°C |      | -55°C TO 125°C |     | UNITS |
|---|------------------|------------------------------------|---|---------------------|------|-----|------|---------------|------|----------------|-----|-------|
|   |                  | V <sub>I</sub> (V)                 | I <sub>O</sub> (mA)                     |                     | MIN  | TYP | MAX  | MIN           | MAX  | MIN            | MAX |       |
| Three-State Leakage Current   | I <sub>OZ</sub>  | V <sub>IL</sub> or V <sub>IH</sub> | V <sub>O</sub> = V <sub>CC</sub> or GND | 6                   | -    | -   | ±0.5 | -             | ±5.0 | -              | ±10 | μA    |
| <b>HCT TYPES</b>  |                  |                                    |   |                     |      |     |      |               |      |                |     |       |
| High Level Input Voltage  | V <sub>IH</sub>  | -                                  | -                                       | 4.5 to 5.5          | 2    | -   | -    | 2             | -    | 2              | -   | V     |
| Low Level Input Voltage   | V <sub>IL</sub>  | -                                  | -                                       | 4.5 to 5.5          | -    | -   | 0.8  | -             | 0.8  | -              | 0.8 | V     |
| High Level Output Voltage<br>CMOS Loads                                 | V <sub>OH</sub>  | V <sub>IH</sub> or V <sub>IL</sub> | -0.02                                   | 4.5                 | 4.4  | -   | -    | 4.4           | -    | 4.4            | -   | V     |
| High Level Output Voltage<br>TTL Loads                                  |                  |                                    | -4                                      | 4.5                 | 3.98 | -   | -    | 3.84          | -    | 3.7            | -   | V     |
| Low Level Output Voltage<br>CMOS Loads                                  | V <sub>OL</sub>  | V <sub>IH</sub> or V <sub>IL</sub> | 0.02                                    | 4.5                 | -    | -   | 0.1  | -             | 0.1  | -              | 0.1 | V     |
| Low Level Output Voltage<br>TTL Loads                                   |                  |                                    | 4                                       | 4.5                 | -    | -   | 0.26 | -             | 0.33 | -              | 0.4 | V     |
| Input Leakage Current   | I <sub>I</sub>   | V <sub>CC</sub> to GND             | 0                                       | 5.5                 | -    | -   | ±0.1 | -             | ±1   | -              | ±1  | μA    |
| Quiescent Device Current  | I <sub>CC</sub>  | V <sub>CC</sub> or GND             | 0                                       | 5.5                 | -    | -   | 8    | -             | 80   | -              | 160 | μA    |
| Additional Quiescent Device Current Per Input Pin: 1 Unit Load (Note 2) | ΔI <sub>CC</sub> | V <sub>CC</sub> -2.1               | -                                       | 4.5 to 5.5          | -    | 100 | 360  | -             | 450  | -              | 490 | μA    |
| Three-State Leakage Current   | I <sub>OZ</sub>  | V <sub>IL</sub> or V <sub>IH</sub> | V <sub>O</sub> = V <sub>CC</sub> or GND | 5.5                 | -    | -   | ±0.5 | -             | ±5.0 | -              | ±10 | μA    |

NOTE:

2. For dual-supply systems theoretical worst case (V<sub>I</sub> = 2.4V, V<sub>CC</sub> = 5.5V) specification is 1.8mA.

**HCT Input Loading Table**

| INPUT            | UNIT LOADS |
|------------------|------------|
| $\overline{OE}1$ | 0.6        |
| All Others       | 0.55       |

NOTE: Unit Load is ΔI<sub>CC</sub> limit specified in DC Electrical Specifications table, e.g., 360μA max at 25°C.

**Switching Specifications - HC/HCT365** Input t<sub>r</sub>, t<sub>f</sub> = 6ns

| PARAMETER                                       | SYMBOL                              | TEST CONDITIONS       | V <sub>CC</sub> (V) | 25°C |     | -40°C TO 85°C | -55°C TO 125°C | UNITS |
|---|-------------------------------------|-----------------------|---------------------|------|-----|---------------|----------------|-------|
|   |                                     |                       |                     | TYP  | MAX | MAX           | MAX            |       |
| <b>HC TYPES</b>                                 |                                     |                       |                     |      |     |               |                |       |
| Propagation Delay, Data to Outputs<br>HC/HCT365 | t <sub>PLH</sub> , t <sub>PHL</sub> | C <sub>L</sub> = 50pF | 2                   | -    | 105 | 130           | 160            | ns    |
|   |                                     |                       | 4.5                 | -    | 21  | 26            | 32             | ns    |
|   |                                     |                       | 6                   | -    | 18  | 22            | 27             | ns    |
|   |                                     | C <sub>L</sub> = 15pF | 5                   | 8    | -   | -             | -              | ns    |

**CD54/74HC365, CD54/74HCT365, CD54/74HC366**

**Switching Specifications - HC/HCT365** Input  $t_r, t_f = 6\text{ns}$  (Continued)

| PARAMETER   | SYMBOL             | TEST CONDITIONS     | $V_{CC}$ (V) | 25°C |     | -40°C TO 85°C | -55°C TO 125°C | UNITS |
|---|--------------------|---------------------|--------------|------|-----|---------------|----------------|-------|
|   |                    |                     |              | TYP  | MAX | MAX           | MAX            |       |
| Propagation Delay, Data to Outputs HC366                | $t_{PLH}, t_{PHL}$ | $C_L = 50\text{pF}$ | 2            | -    | 110 | 140           | 165            | ns    |
|   |                    |                     | 4.5          | -    | 22  | 28            | 33             | ns    |
|   |                    |                     | 6            | -    | 19  | 24            | 28             | ns    |
|   |                    | $C_L = 15\text{pF}$ | 5            | 9    | -   | -             | -              | ns    |
| Propagation Delay, Output Enable and Disable to Outputs | $t_{PLH}, t_{PHL}$ | $C_L = 50\text{pF}$ | 2            | -    | 150 | 190           | 225            | ns    |
|   |                    |                     | 4.5          | -    | 30  | 38            | 45             | ns    |
|   |                    |                     | 6            | -    | 26  | 33            | 38             | ns    |
|   |                    | $C_L = 15\text{pF}$ | 5            | 12   | -   | -             | -              | ns    |
| Output Transition Time                                  | $t_{TLH}, t_{THL}$ | $C_L = 50\text{pF}$ | 2            | -    | 60  | 75            | 90             | ns    |
|   |                    |                     | 4.5          | -    | 12  | 15            | 18             | ns    |
|   |                    |                     | 6            | -    | 10  | 13            | 15             | ns    |
| Input Capacitance                                       | $C_I$              | -                   | -            | -    | 10  | 10            | 10             | pF    |
| Three-State Output Capacitance                          | $C_O$              | -                   | -            | -    | 20  | 20            | 20             | pF    |
| Power Dissipation Capacitance (Notes 3, 4)              | $C_{PD}$           | -                   | 5            | 40   | -   | -             | -              | pF    |
| <b>HCT TYPES</b>  |                    |                     |              |      |     |               |                |       |
| Propagation Delay, Data to Outputs HC/HCT365            | $t_{PLH}, t_{PHL}$ | $C_L = 50\text{pF}$ | 4.5          | -    | 25  | 31            | 38             | ns    |
|   |                    | $C_L = 15\text{pF}$ | 5            | 9    | -   | -             | -              | ns    |
| Propagation Delay, Data to Outputs HC366                | $t_{PLH}, t_{PHL}$ | $C_L = 50\text{pF}$ | 4.5          | -    | 27  | 34            | 41             | ns    |
|   |                    | $C_L = 15\text{pF}$ | 5            | 11   | -   | -             | -              | ns    |
| Propagation Delay, Output Enable and Disable to Outputs | $t_{PLH}, t_{PHL}$ | $C_L = 50\text{pF}$ | 4.5          | -    | 35  | 44            | 53             | ns    |
|   |                    | $C_L = 15\text{pF}$ | 5            | 14   | -   | -             | -              | ns    |
| Output Transition Time                                  | $t_{TLH}, t_{THL}$ | $C_L = 50\text{pF}$ | 4.5          | -    | 12  | 15            | 18             | ns    |
| Input Capacitance                                       | $C_{IN}$           | -                   | -            | -    | 10  | 10            | 10             | pF    |
| Three-State Capacitance                                 | $C_O$              | -                   | -            | -    | 20  | 20            | 20             | pF    |
| Power Dissipation Capacitance (Notes 3, 4)              | $C_{PD}$           | -                   | 5            | 42   | -   | -             | -              | pF    |

NOTES:

- $C_{PD}$  is used to determine the dynamic power consumption, per buffer.
- $P_D = V_{CC}^2 f_i (C_{PD} + C_L)$  where  $f_i$  = Input Frequency,  $C_L$  = Output Load Capacitance,  $V_{CC}$  = Supply Voltage.

Test Circuits and Waveforms

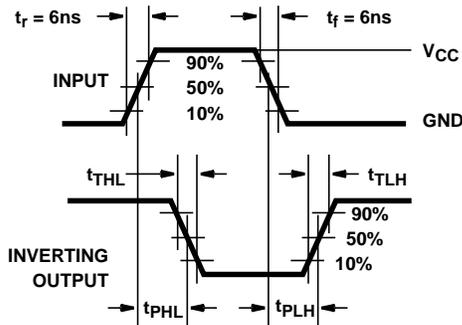


FIGURE 2. HC TRANSITION TIMES AND PROPAGATION DELAY TIMES, COMBINATION LOGIC

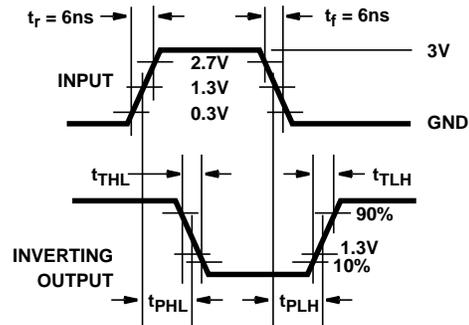


FIGURE 3. HCT TRANSITION TIMES AND PROPAGATION DELAY TIMES, COMBINATION LOGIC

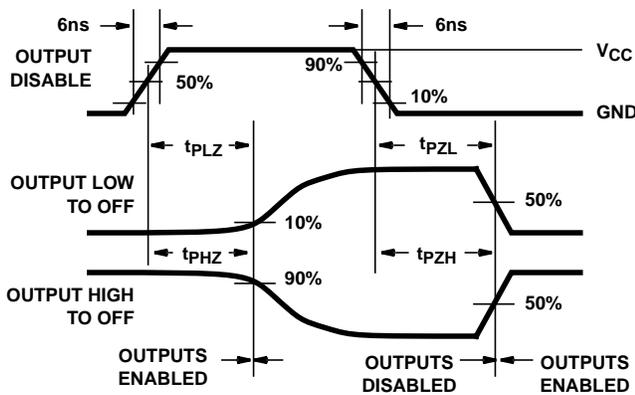


FIGURE 4. HC THREE-STATE PROPAGATION DELAY WAVEFORM


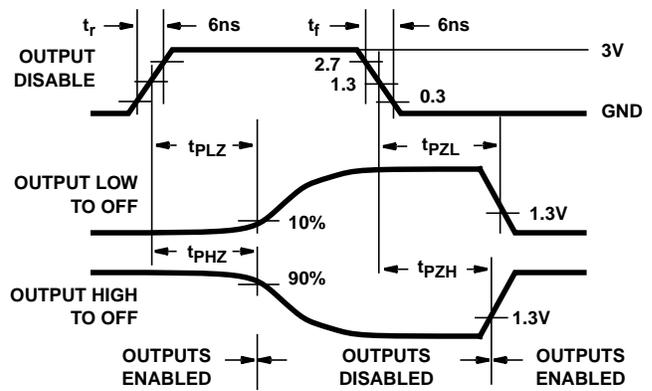


FIGURE 5. HCT THREE-STATE PROPAGATION DELAY WAVEFORM

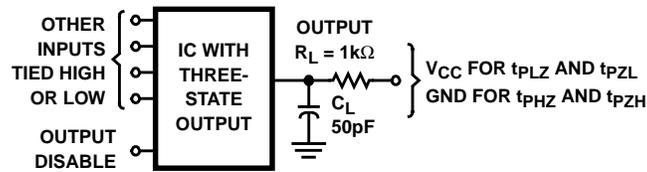

NOTE: Open drain waveforms  $t_{pLZ}$  and  $t_{pZL}$  are the same as those for three-state shown on the left. The test circuit is Output  $R_L = 1k\Omega$   $V_{CC}$ ,  $C_L = 50pF$ .

FIGURE 6. HC AND HCT THREE-STATE PROPAGATION DELAY TEST CIRCUIT

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup>               |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|--|
| CD54HC365F3A     | ACTIVE                | CDIP         | J               | 16   | 1           | None                    | Call TI          | Level-NC-NC-NC                             |
| CD54HC366F3A     | ACTIVE                | CDIP         | J               | 16   | 1           | None                    | Call TI          | Level-NC-NC-NC                             |
| CD54HCT365F3A    | ACTIVE                | CDIP         | J               | 16   | 1           | None                    | Call TI          | Level-NC-NC-NC                             |
| CD74HC365E       | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                             |
| CD74HC365M       | ACTIVE                | SOIC         | D               | 16   | 40          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |
| CD74HC365M96     | ACTIVE                | SOIC         | D               | 16   | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |
| CD74HC365MT      | ACTIVE                | SOIC         | D               | 16   | 250         | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |
| CD74HC366E       | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                             |
| CD74HC366M       | ACTIVE                | SOIC         | D               | 16   | 40          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |
| CD74HC366M96     | ACTIVE                | SOIC         | D               | 16   | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |
| CD74HCT365E      | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                             |
| CD74HCT365M      | ACTIVE                | SOIC         | D               | 16   | 40          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |
| CD74HCT365M96    | ACTIVE                | SOIC         | D               | 16   | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |
| CD74HCT365MT     | ACTIVE                | SOIC         | D               | 16   | 250         | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1 YEAR/<br>Level-1-235C-UNLIM |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - May not be currently available - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**None:** Not yet available Lead (Pb-Free).

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

J (R-GDIP-T\*\*)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE

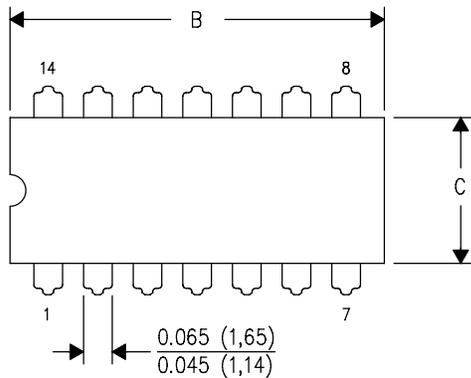

| DIM \ PINS ** | 14                     | 16                     | 18                     | 20                     |
|---------------|------------------------|------------------------|------------------------|------------------------|
| A             | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX         | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN         | —                      | —                      | —                      | —                      |
| C MAX         | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN         | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |




4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE


16 PINS SHOWN

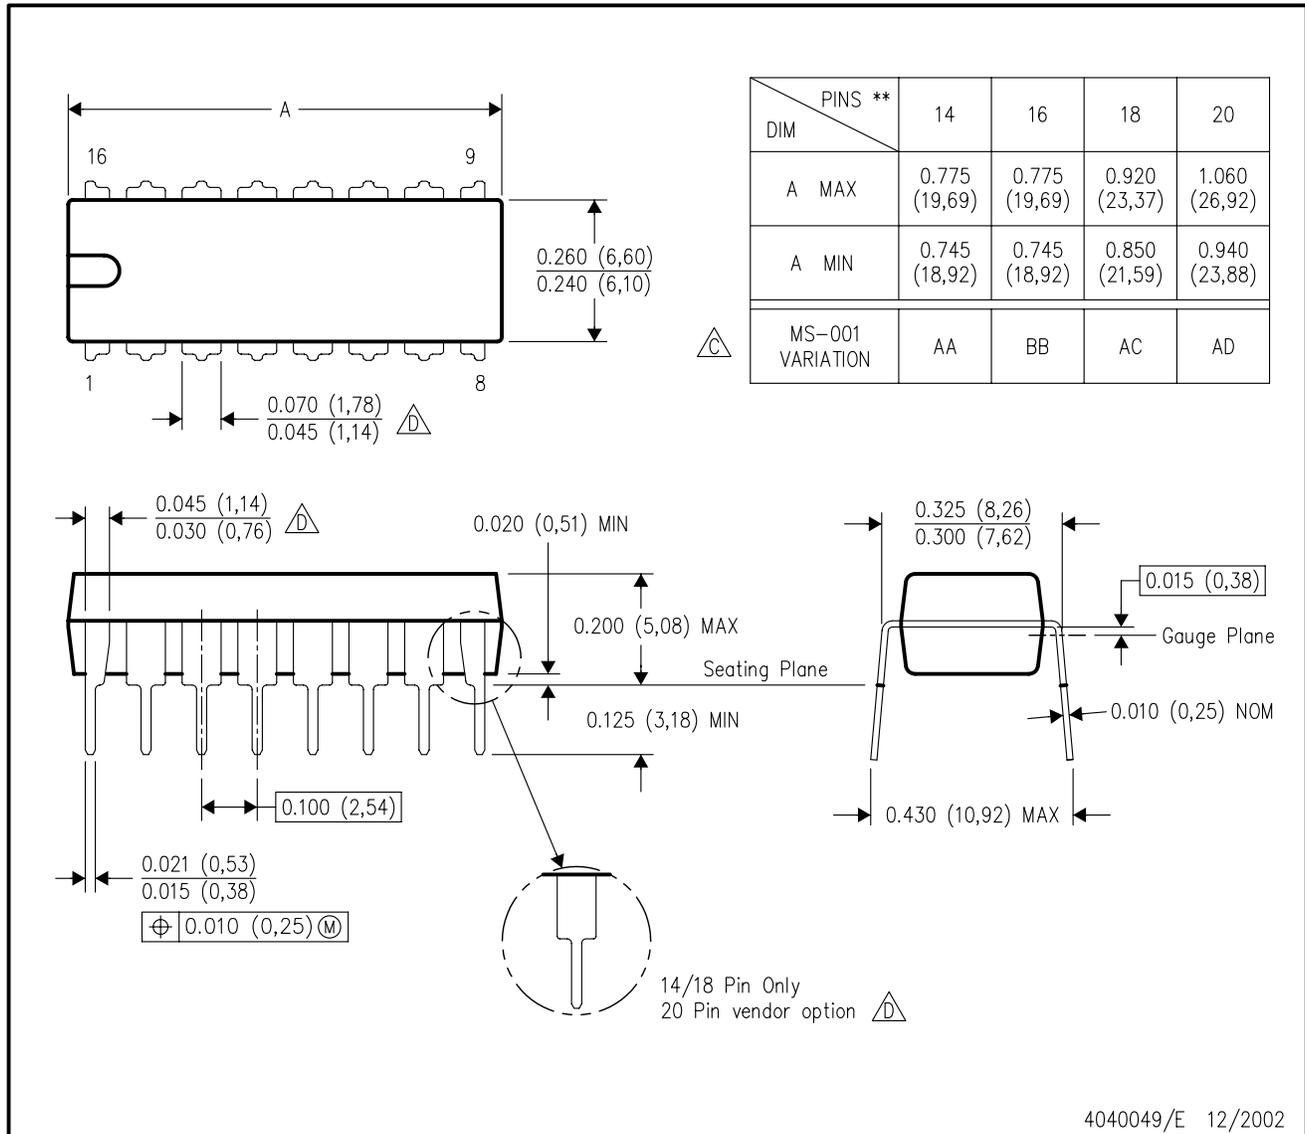

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R-PDSO-G16)

PLASTIC SMALL-OUTLINE PACKAGE

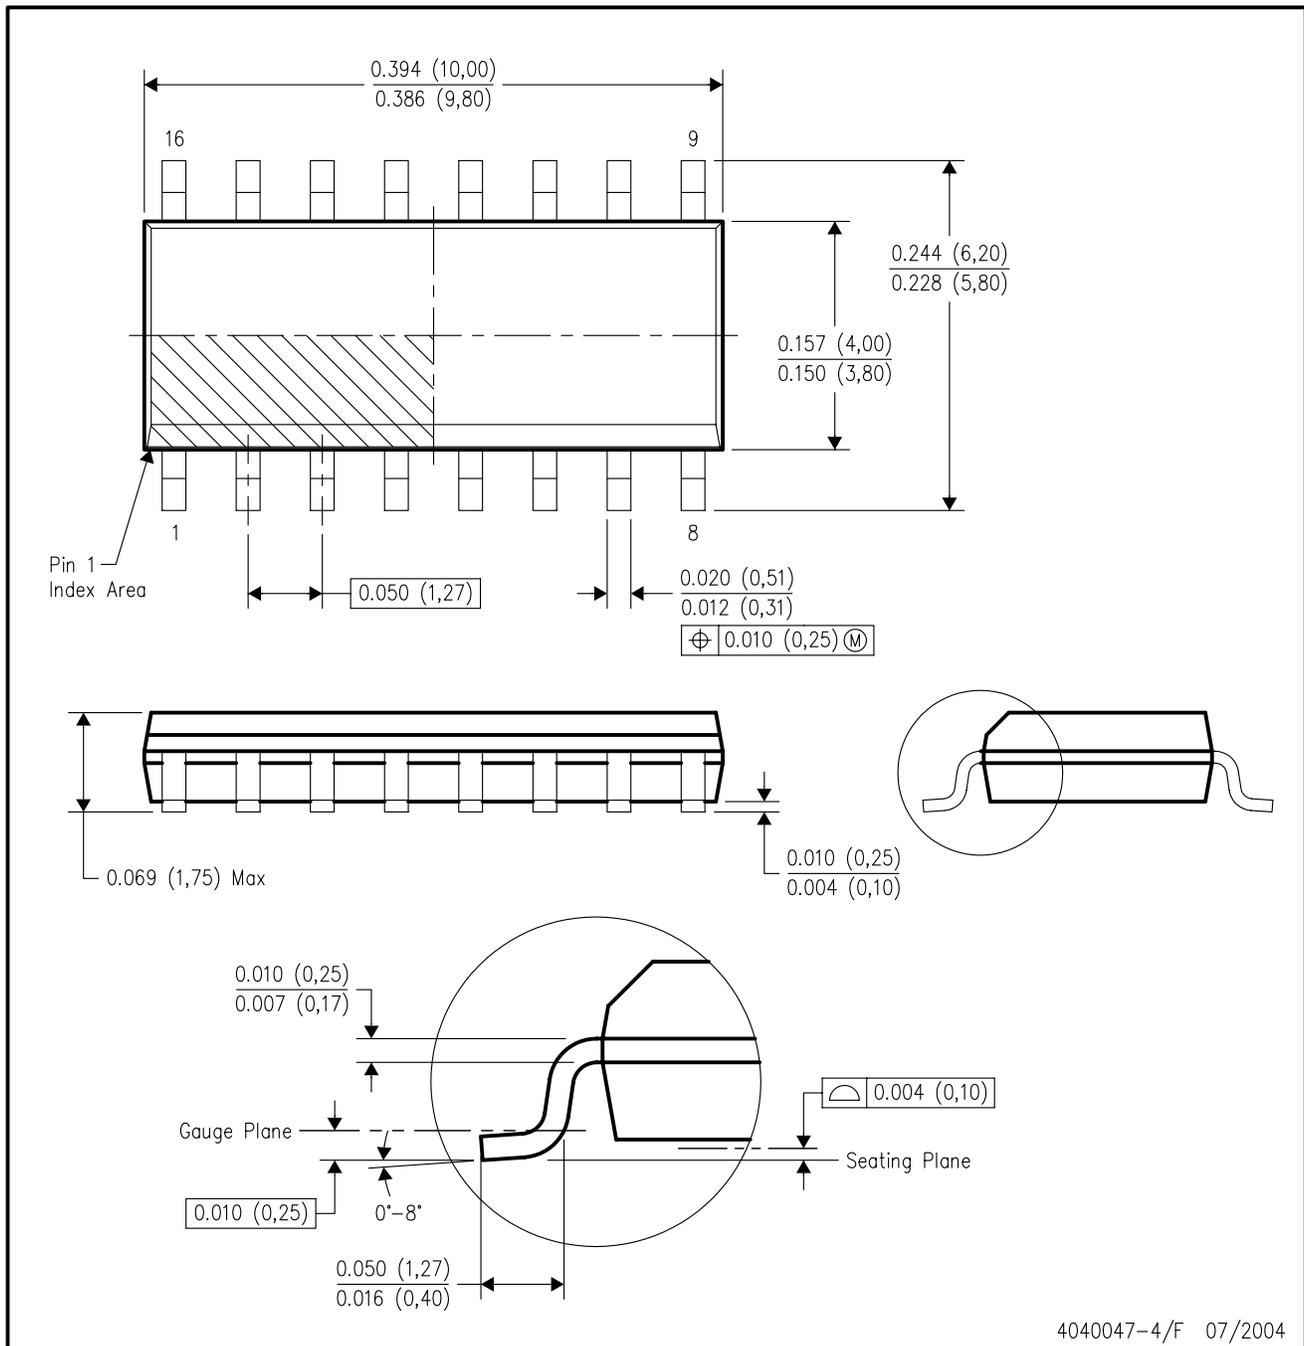

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
  - D. Falls within JEDEC MS-012 variation AC.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |  | <b>Applications</b> |  |
|------------------|--|---------------------|--|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |  | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |  | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |  | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.