


# DIN41612 Q TYPE FEMALE (2ROW 90°)

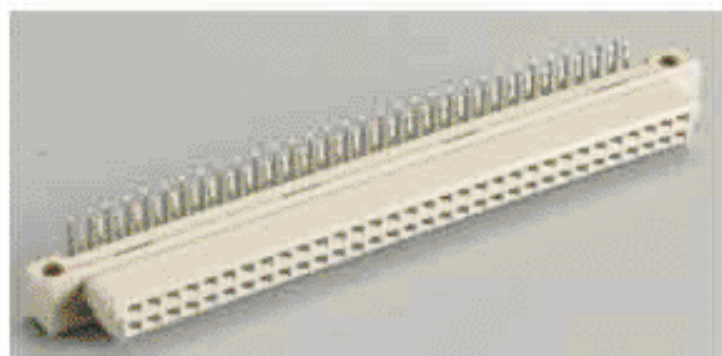

## MATERIAL

\*Housing : 30% Glass Filled PBT UL94V-0.

\*Contact : Phosphor Bronze.

## SPECIFICATION


\*Current Rating : 2 AMP.

\*Dielectric Withstanding Voltage : AC 1000V For 1 minute.

\*Insulator Resistance : 1000M  $\Omega$  min. at DC 500V.

\*Contact Resistance : 30m  $\Omega$  max. at DC 100mA.

\*Operation Temperature : - 55°C to + 105°C.

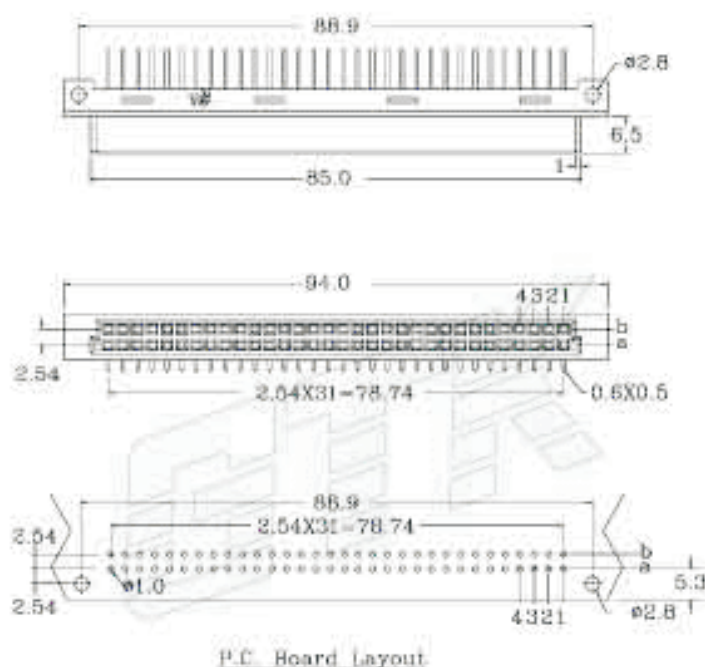

UNIT : mm

| Series       | Position | Rows with Contacts | Contact Arrange |
|--------------|----------|--------------------|-----------------|
| D6<br>2.54mm | 64       | a b                |                 |
|              | 32       | a -                |                 |
| D5<br>5.08mm | 32       | a b                |                 |
|              | 16       | a -                |                 |

Ordering Information STANDARD DIMENSION : SHOW P/N END TO CODE #6

SPECIAL DIMENSION : KEEP SHOWING CODE #7-8 (PS.標準碼為6碼,第7-8碼視需要加註於標準碼後)

|    |   |    |   |   |   |   |     |   |     |
|----|---|----|---|---|---|---|-----|---|-----|
| D6 | F | 64 | R | T | 1 | + | B/L | / | 10U |
| 1  | 2 | 3  | 4 | 5 | 6 | 7 | 8   |   |     |

## 1.SERIES NO (產品系列)

D6 = DIN41612 Q TYPE PITCH:2.54MM  
(塑膠二排,PITCH:2.54MM)

D5 = DIN41612 Q TYPE PITCH:5.08MM  
(塑膠二排,PITCH:5.08MM)

## 2.CONTACT TYPE (連接器類別):

F = FEMALE (母座)

## 3.POSITION (端子數):

D6 = 64,32

D5 = 32,16

## 4.SERIES TYPE (產品型式)

R = RIGHT ANGLE (插板式90°)

## 5.CONTACT PLATED (端子電鍍):

T = TIN PLATED ON TERMINAL &  
GOLD PLATED ON CONTACT  
(半金鍍)

G = ALL GOLD PLATED (全金)

## 6.PIN TYPE (端子型式):

1 = DIP TYPE

## 7.PARTS OPTION (附件選擇)

B/L = WITH BOARDLOCK (有魚叉)

## 8.SPECIAL TYPE (特殊規格)

10U = 10 $\mu$ " GOLD PLATED  
ON CONTACT (鍍金10 $\mu$ )  
PS:STANDARD IS GOLD FLASH  
BLANK FOR STANDARD  
(標準品不需標註)