


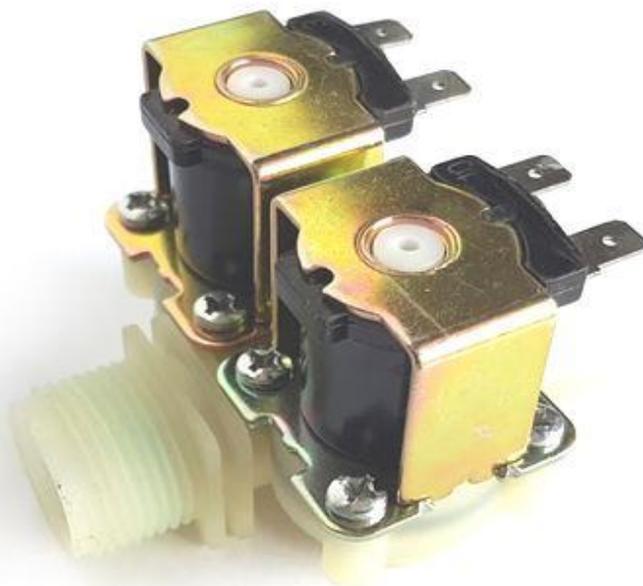

## DCF2-180PA-303

## DUAL OUTLET 12VDC FLUIDS SOLENOID VALVE

**Description:**

Product main technical indicators and precautions:

1. Low pressure solenoid valve inlet valve using the environmental conditions

1.1 Altitude not exceeding 2500 meters

1.2 Ambient temperature is 0-40 ° C

1.3 Air relative humidity below 95% (temperature 25 ° C)

2 type and rated technical parameters

2.1 Type: Directional (one-way) solenoid valve (also known as filler-type pilot valve action or solenoid valve)

2.2 Rated voltage: 12VDC

2.3 Rated: 12V-300mA

2.4 work: short-term fixed-value system (that is, intermittent work cycle system) 3min. ON, 5min, OFF

2.5 Insulation class: E-class insulation

2.6 Use fluid: (0-55 ° C) water

2.7 Water pressure: 0.02-0.8 Mpa

2.8 Water flow characteristics

Water pressure (Mpa) 0.02 0.1 0.3 0.8

(Kim Yi-factory standards) Flow (L / min)> 5> 11> 18> 32

(Domestic standard) Flow (L / min)> 3> 8> 13> 25

2.9 life expectancy: more than 100,000 times

