


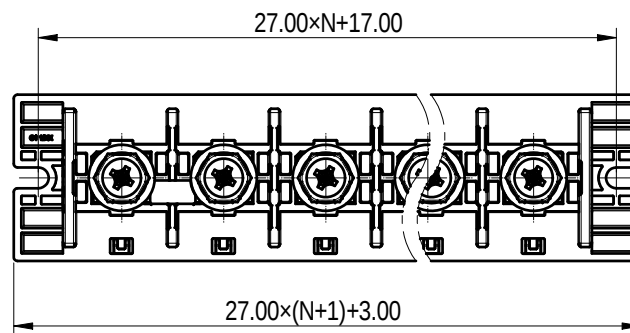
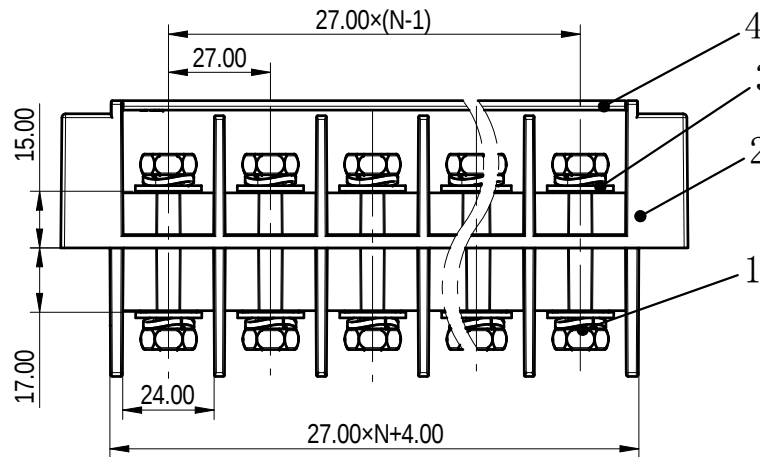
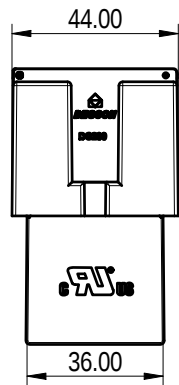


Schematic diagram without cover

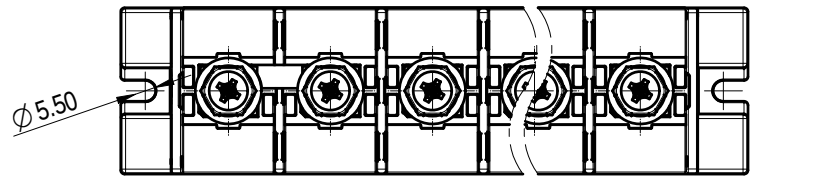

1:5



4	Cover	PC	UL94V-2
3	Cage	Copper alloy	M8/Ni plated
2	Housing	PA66+25%GF	UL94V-0
1	screw	Steel	M8/Zn plated
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		E		
额定电压/电流/Rated Voltage(V)/Current(A)		1000/200		
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定直流电压/电流/Rated Voltage(V)/Current(A)		1500/200	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M8, 6/53.12		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		6~3/0 / 10~70		
间距/Pitch(mm)/线数范围/Poles		27/N=02~05P		
使用温度范围/Operating temperature(°C)		-40~+120		
符合RoHS环保要求/Conform to RoHS		Yes		

			MATERIAL: /			SURFACE/COLOR: /			
			MAT NO./REV: /			MAT STATUS: /			
APPD:	蓝贵凡	2023.02.07	NAME DG200-A-XXP-1Y-00A&Z (H)						
CHKD:	曹利彬	2023.02.07							
DRFT:	虞倩松	2023.02.07	DRAWING NO.		TYPE	DRAWING STATUS		SCALE	SHEET
	A4		/		CUSTOMER DRAWING	已发布		1:2	1/1

00					
REV	ECN	DESCRIPTION	DRFT	DATE	