



DG 2000 APPROVAL:CE

- 弹簧式垫圈螺钉连接技术；
- 优良的抗振动性能；
- 栅栏式结构，可用OT/U型头连接。提高稳定性。
- 铜质焊脚，保证UL C级：600V/75A，
- 最大线径：4AWG；
- 高度尺寸：36mm。
- Screw connection technology with spring washer;
- Excellent anti-vibration performance;
- Barrier structure,mating with OT/U terminal, stability improved;
- Copper soldering pin ensure UL C class: 600V/75A;
- Max wire range:4AWG;
- Height dismensions:36mm.

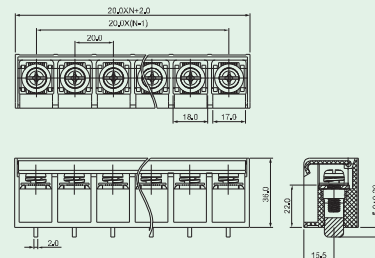

DG 2000H APPROVAL:CE

- 弹簧式垫圈螺钉连接技术；
- 优良的抗振动性能；
- 栅栏式结构，可用OT/U型头连接。提高稳定性。
- 铜质焊脚，保证UL C级：600V/75A，
- 最大线径：4AWG；
- 高度尺寸：60mm。
- Screw connection technology with spring washer;
- Excellent anti-vibration performance;
- Barrier structure,mating with OT/U terminal, stability improved;
- Copper soldering pin ensure UL C class: 600V/75A;
- Max wire range:4AWG;
- Height dismensions:60mm.

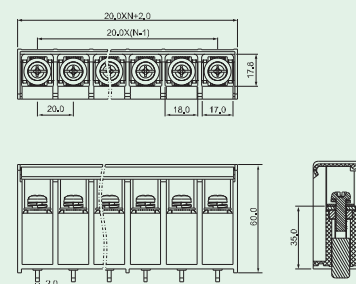

技术参数 Technical Data

型号 Model	线径 Wire range	线数 Poles	IEC技术参数 (IEC datasheet)		UL技术参数 (UL datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG2000	0.5-25mm ² /26-4AWG	02-12P	1000V	75V	600V	75V
DG2000H	0.5-25mm ² /26-4AWG	02-12P	1000V	75V	600V	75V

应用行业 Application

工业自动化、电力电气、光伏等行业。
Industrial automation , electric power , photovoltaic industry etc .

产品包装方式 Packing

Product model	Pcs./Pkt.
DG2000-02P	198
DG2000-03P	117
DG2000-04P	108
DG2000-05P	81
DG2000-06P	72
DG2000-07P	63
DG2000-08P	54
DG2000-09P	54
DG2000-10P	45
DG2000-11P	45
DG2000-12P	45

Product model	Pcs./Pkt.
DG2000H-02P	198
DG2000H-03P	117
DG2000H-04P	108
DG2000H-05P	81
DG2000H-06P	72
DG2000H-07P	63
DG2000H-08P	54
DG2000H-09P	54
DG2000H-10P	45
DG2000H-11P	45
DG2000H-12P	45

产品订货 How to order

