

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

NOTES:

UL Standard








1. Rated voltage/current : 300V / 20A
2. Torque value : M4 , 10.53lb.in
3. Wire range : 22~12AWG

NOTES:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.0mm, Poles : N=02~24P
- 3.Withstanding voltage : AC1600V/1min
- 4.Operating temperature: -40℃~+105℃
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				—	$\subset$	$\supset$	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10			
TO 10	TO 20	TO 30	TO 60	TO 100	TO 150				
6 10	24 30	60 100	150	<					
$\pm 0.15 \pm 0.20 \pm 0.30 \pm 0.50 \pm 0.70 \pm 1.00 \pm 1.30$							$\pm 2^\circ$		

6. RoHS Compliance

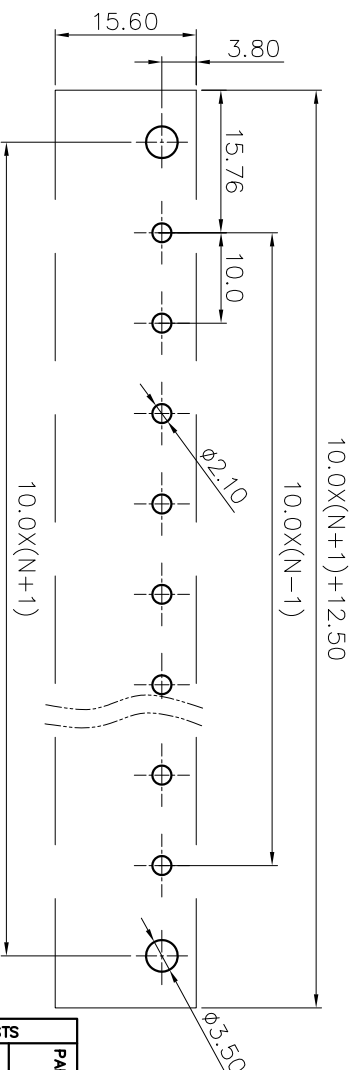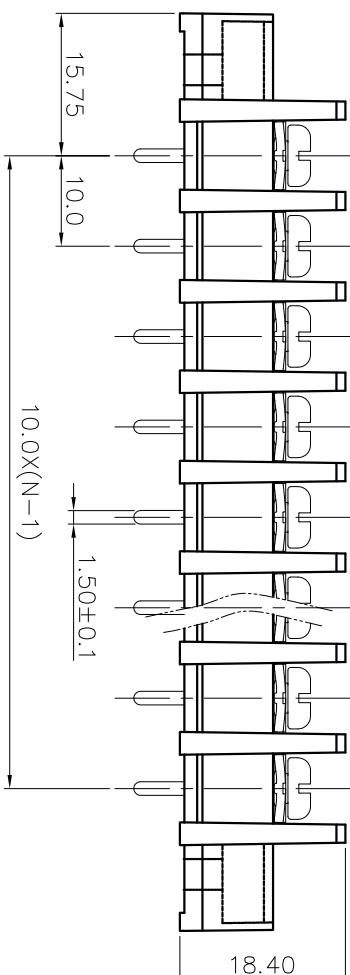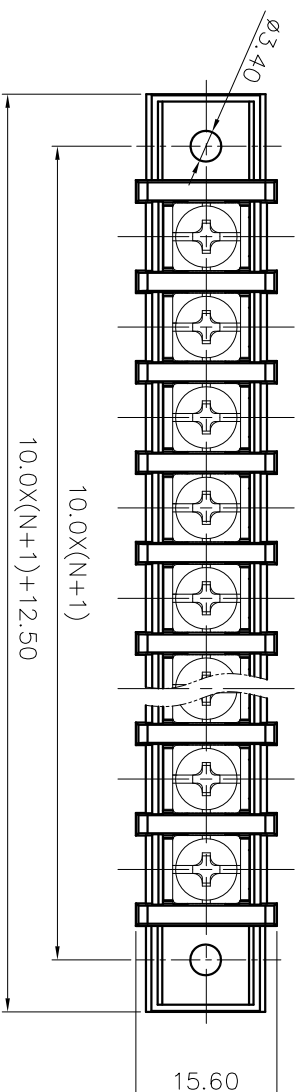

DETACHED LISTS			
PART NO.:	/		
APPD:	/		
CHKD:	/		
DRTI:	/		
			
THIRD ANGLE PROJECTION			
			
DRAWING NO.:		/	
DO NOT SCALE DRAWING		SCALE	
1:1		1:1	