

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 600V / 30A(10~14AWG)
600V / 75A(4~14AWG)

2.Torque value : M5 , 17.54Lb.in

3.Wire range : 14~4AWG

NOTES2:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 17.45mm, Poles : N=02~12P



3.Withstanding voltage : AC2200V/1Min

4.Operating temperature : -40°C~+125°C

5.Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm						0.1/10	
TO	Over	TO	Over	TO	Over	TO	Over		
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	100	100 TO 150
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

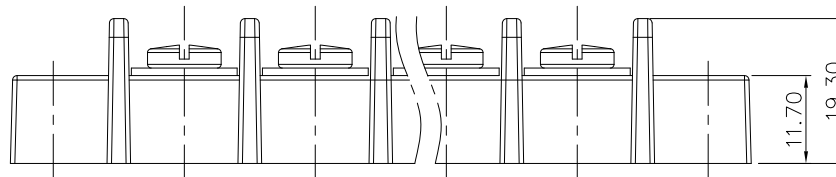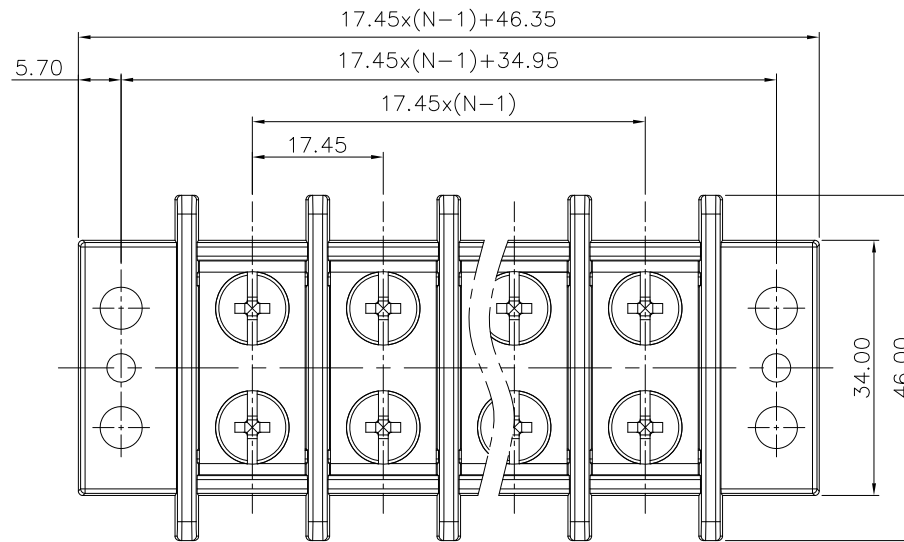

DG99-A - XXP - 1Y - 00A (H)
(RoHS)
00A-(Standard)
(Series No.)(Poles)(Single Pitch)(Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME:			
	CHKD:	/				DG99-A-XXP-1Y-00A(H)			
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
THIRD ANGLE PROJECTION		DRAWING NO.:		/		SHEET		1/1	
		MM (INCH)		DO NOT SCALE DRAWING		SCALE		1:1	