
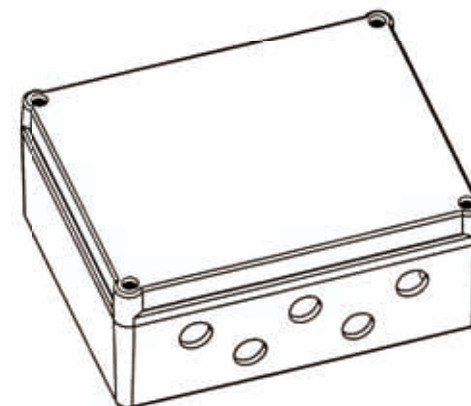
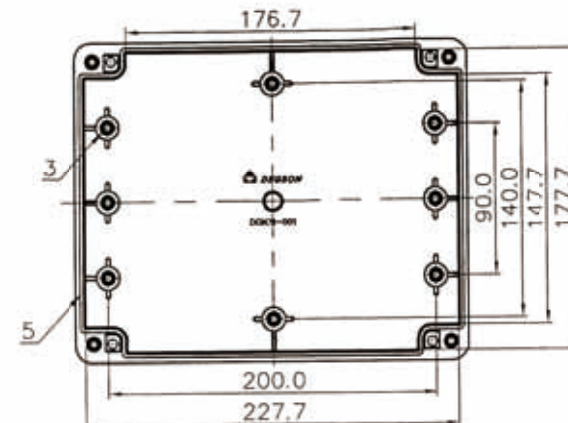
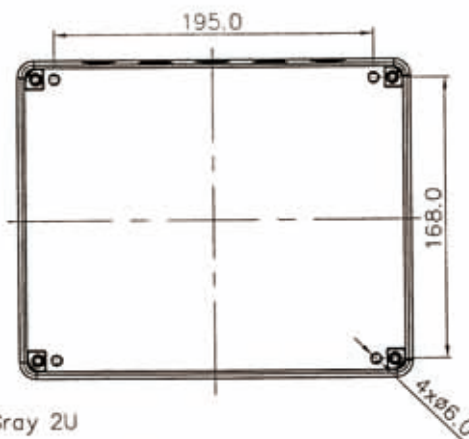
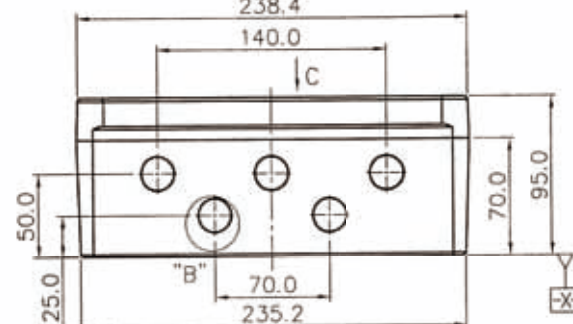
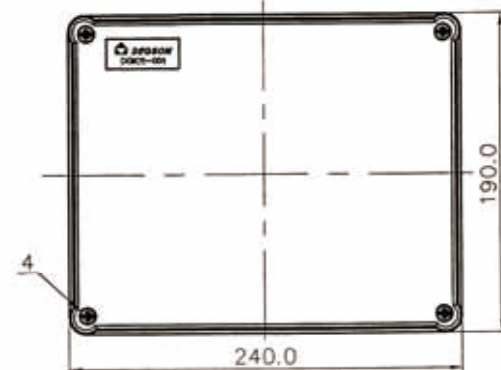



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

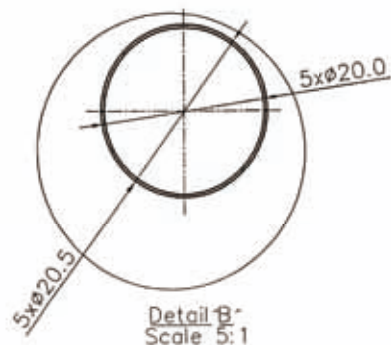

NOTE:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Operating temperature: $-40^{\circ}\text{C}\sim 110^{\circ}\text{C}$
- 3.Torque value : M5 , 1.2N·m
- 4.Standard color number: PANTONE Cool Gray 2U
- 5.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm			
Over 6 TO 10	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	0.1/10
TO 6	TO 24	TO 30	TO 60	<
± 0.15	± 0.20	± 0.30	± 0.50	± 0.70
			± 1.00	± 1.30
				$\pm 2^{\circ}$

6.RoHS Compliance

5	WATERPROOF RING	RUBBER	UL94V-2
4	SCREW	STEEL	Zn Plated
3	NUT	Copper alloy	
2	COVER	PC	UL94V-2
1	HOUSING	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DGK11-001-11-00A(H)			
	CHKD: <i>Xbm/3/17</i>	TITLE: CUSTOMER DRAWING			
	DRFT: MJN 01/02/17				
	 THIRD ANGLE PROJECTION		DRAWING NO.: DGK11-001-C01	SHEET 1/1	D0-1
		 DO NOT SCALE DRAWING	SCALE 1:1		