

SPECIFICATION

MATERIAL

Housing: PBT+30%G.F UL94V-0

Contacts: Brass

ELECTRICAL


Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC


Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

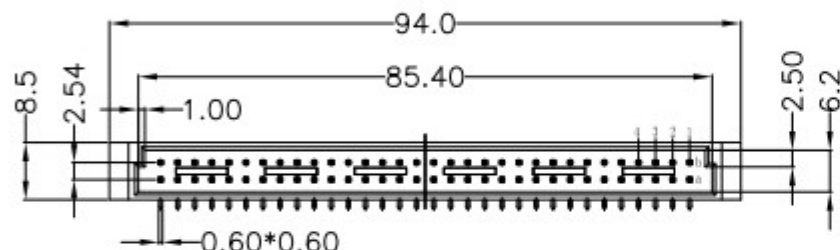

NEW PART NUMBER

DIN1	2	32	M	A	R	XX	N	C	A	1
	NO. of Pins Per Row 32P					Contact Plating	DIP	Length		Packing
						G0=Gold Flash		C=3.00		0=PE Bag
						G1=3u"Gold				A=Tray
						G2=5u"Gold				T=Tube
						G3=10u"Gold				
						G4=15u"Gold				
						G5=30u"Gold				
						S0=Gold Flash/Tin				
						SN=Tin Plated				

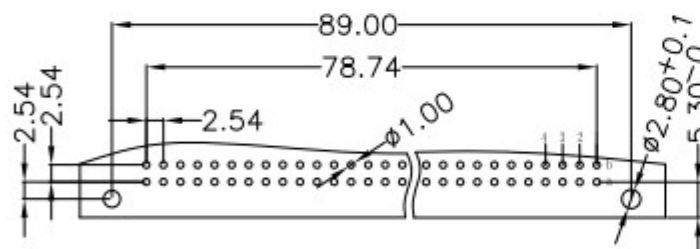

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. : ±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Helen	2011/04/18	LPI	深圳市起德电子科技有限公司 SHEN ZHEN QIDE ELECTRONIC TECHNOLOGY CO.,LTD	PART NO.	DIN1-232MARXXNCA1	UNIT	mm
				X.X	±0.40									
				X.XX	±0.25	DESIGN	Jenny	2011/04/18					SCALE	1:1
				X.XXX	±0.15	CHECK	Franck	2011/04/18					SHEET	1/1
				Angle	±3°	APPROVE	Steven	2011/04/18					PROJ.	
				DIM	TOL						Customer NO.	---		