

ROHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
E		MODIFY P/N	MAY.31'11

REV	ECN NO.	DESCRIPTION	DATE
A	GTKSD0616	RELEASE	FEB. 06. 01
B		MODIFY PART_NO	OCT. 01. 02
C		ADD. SPEC & DIM	MAR. 25' 05
D		ADD. RoHS	JAN. 25' 07




MATERIALS:

INSULATOR:P. B. T. 30%GLASS FIBER, UL94V-0
COLOR:BLACK(STANDARD) OR GR-GRAY
CONTACTS:BRASS OR PHOSPHOR BRONZE,
G=GOLD FLASH OVER NICKEL
T=TIN PLATEOVER NICKEL


ELECTRICAL:

CURRENT RATING:1AMP.
INSULATION RESISTANCE:1000M Ω MIN.
DIELECTRIC WITHSTANDING:500VAC
OPERATING TEMPERATURE:-55 $^{\circ}$ C ~ +105 $^{\circ}$ C

CONTACTS	DIM. A	DIM. B
06	12.94	5.08
08	15.48	7.62
10	18.10	10.16
12	20.51	12.70
14	23.05	15.24
16	25.64	17.78
18	28.15	20.32
20	30.78	22.86
24	35.86	27.94
26	38.40	30.48
28	40.60	33.02
30	43.50	35.56
34	48.58	40.64
40	56.20	48.26
50	69.00	60.96
60	81.75	73.66
64	86.83	78.74

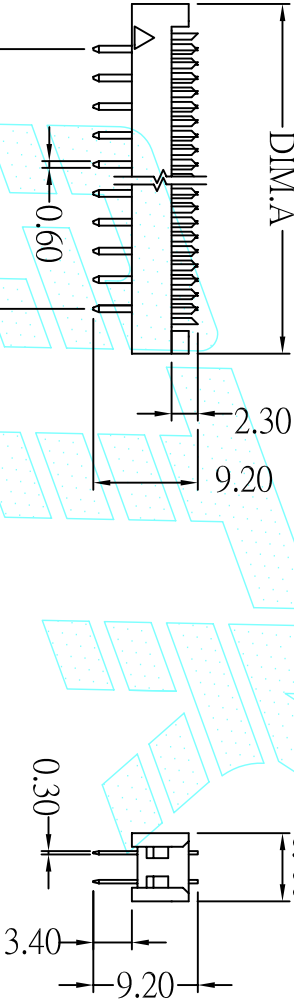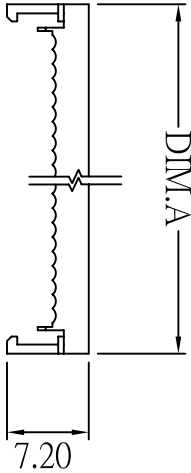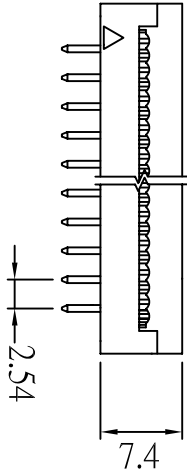

Recommended P. C. Board Hole Layout

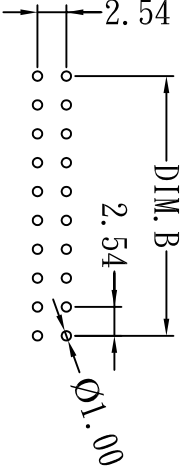

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		GOLD-TEK		ELECTRIC CO., LTD.	
LINEAR	ANGLE	UNITS		TITLE			PART NO.
X. ±	X°. ±	MM		DIP PLUG CONNECTOR ROW TO ROW: 2.54mm PITCH: 2.54mm	IPART NO		DP***N11(-GR)
X. ± 0.25	X°. ±						
.XX ± 0.15	.XX° ±						
.XXX±	.XXX° ±	SCALE					
APPD		SIZE					
CHKD		A4					
DRAW	Z.	MAY. 31' 2011					
圖面編號: GTKSD0616-E(1)							

GOLD-TEK ELECTRIC CO., LTD.

圖面編號:GTKSD0616-E(1)