
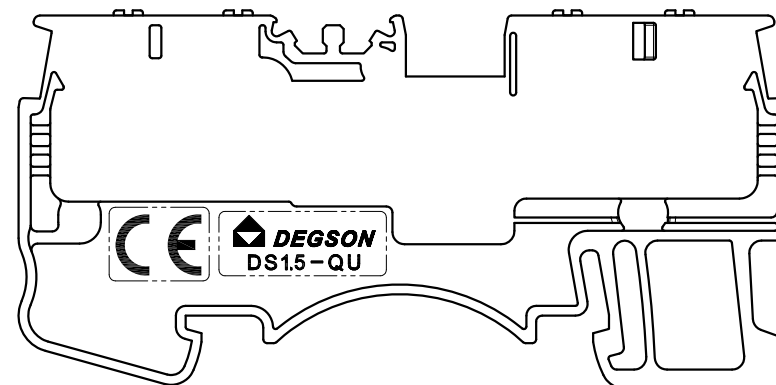
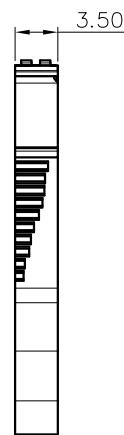
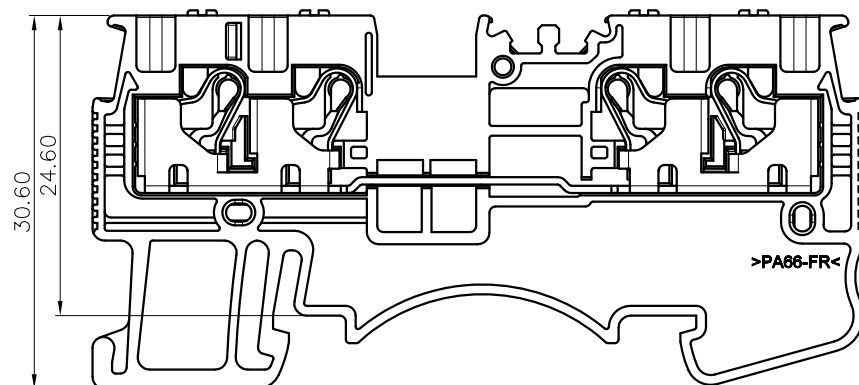


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

DS1.5-QU - 01P - 1Y - 00A (H)
(Series No.)(Poles)(Single Pitch) (Color):1.(Grey)
(RoHS)
00A-(Standard)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

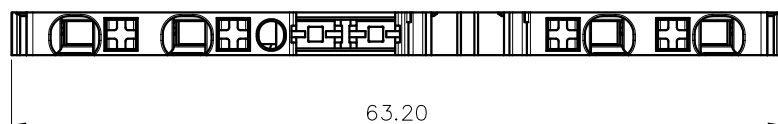

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Wire range : 26~16AWG&14AWG(SOL)

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6.0KV
Rate voltage(V)	500V
Rate current(A)	17.5A

- 2.Wire range : 0.14~1.5mm²
conductor cross section flexible, with
ferrule with plastic sleeve max.0.5mm²
(Stripping length: 8mm)

NOTES2:

- 1.Dimension shall be interpreted per
ASME Y14.5-2009
- 2.Pitch : 3.5mm, Poles : 01P
- 3.Stripping length : 8~10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150				0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

- 6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				DEGSON [®] 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DS1.5-QU-01P-1Y-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				REV DO			
		THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1		DO NOT SCALE DRAWING	
				MM (INCH)		SCALE 1:1			