
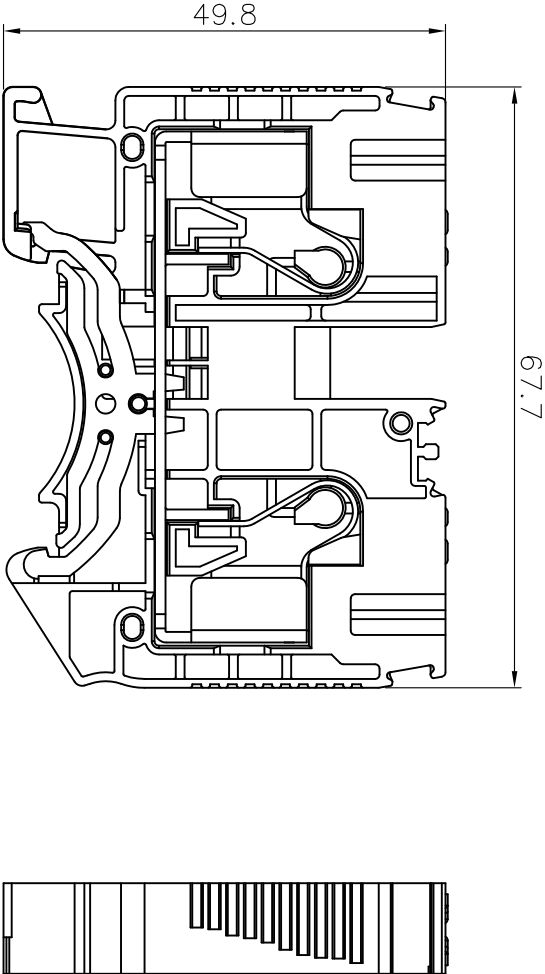



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT
		DATE	

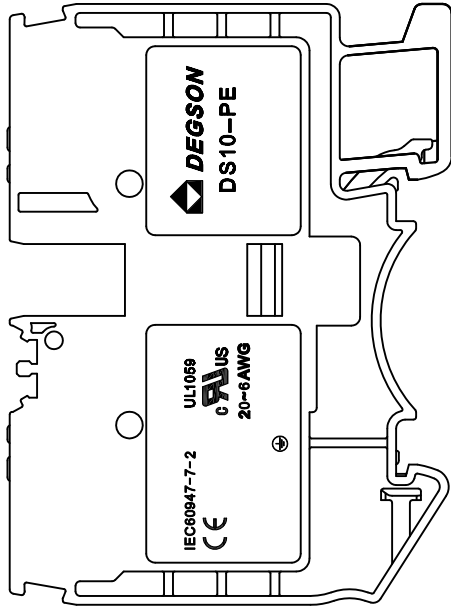

NOTES1:
UL Standard
1.Wire Range : 20~6AWG
IEC Standard

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	/
Rate Current(A)	/

2.Wire Range : 0.5~10mm²,sol:16mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.2mm
- 3.Stripping length : 16-18mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch Range in mm		Nominal Dimension		Range			
Over	10	Over	30	60	100	Over	0.1/10
TO	TO	TO	TO	TO	TO	TO	
6	10	24	30	60	100	150	≤
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30							±2°

6.RoHS Compliance

DS10-PE - 01P - 1C - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color) : Yellow-Green

PART NO.:		/
NAME:		DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	
CHKD:	/	
DRFT:	/	
TITLE: CUSTOMER DRAWING		DS10-PE-01P-1C-00A(H)
DRAWING NO.:	/	
THIRD ANGLE PROJECTION	1X1 (INCH)	DO NOT SCALE DRAWING
REV	DO	
SHEET	1/1	
SCALE	1:1	