
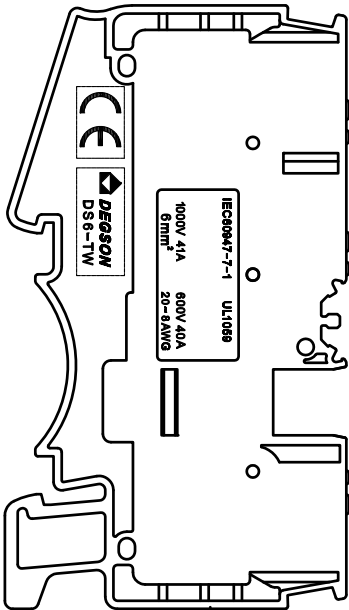


REVISION RECORD				
REV	ECN	DESCRIPTION	DRAFT	DATE

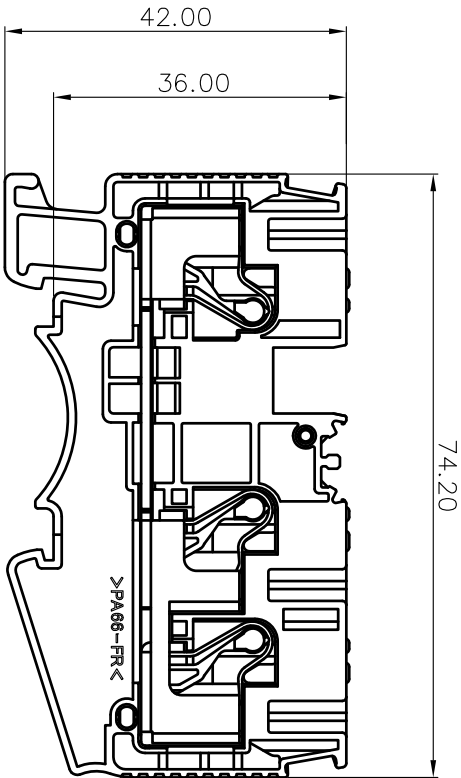

DS6-TW - 01P - 1Y - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black)
4.(Green) 5.(Orange) 6.(Red)
7.(Transparent) 8.(Yellow) 9.(White)

NOTES1:

UL Standard

1.Rated voltage/current : 600V / 40A

2.Withstanding voltage : AC2200V/1Min.

3.Wire range : 20~8AWG

IEC Standard

1.

Pollution degree	3
Over-voltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	1000V
Rate current(A)	41A

2.Wire range : 0.5~6mm²,10mm²(SOL)

NOTES2:

1.Dimension shall be interpreted per

ASME Y14.5-2009

2.Pitch : 8.2mm, Poles : 01P

3.Stripping length : 10-12mm

4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch	range in mm	Nominal dimension	range in mm	Over	Over	Over	Over	Over	Over
mm	Over	Over	Over	Over	Over	Over	Over	Over	Over
	6	10	30	60	100	150	150	150	150
	TO	TO	TO	TO	TO	TO	TO	TO	TO
	6	10	24	30	60	100	150	150	150
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

DETACHED LISTS				
PART NO.:	/	DESSON®	宁波高松电子有限公司	
NAME:		NINGBO DESSON ELECTRICAL CO., LTD		
APPD:		NAME:	DS6-TW-01P-1Y-00A(H)	
CHKD:		CUSTOMER DRAWING	REV	DO
DFT:	/	TITLE:	REV	DO
THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET	1/1
		DO NOT SCALE DRAWING	SCALE	1:1