

# GP2S28

## Long Focal Distance, Case Type Photointerrupter

### ■ Features


1. Long focal distance type  
(Detecting range: 6mm)
2. With pins for protection of wrong insertion
3. Snap-in mounting type

### ■ Applications

1. CD players
2. Facsimiles
3. Printers

### ■ Outline Dimensions

(Unit : mm)

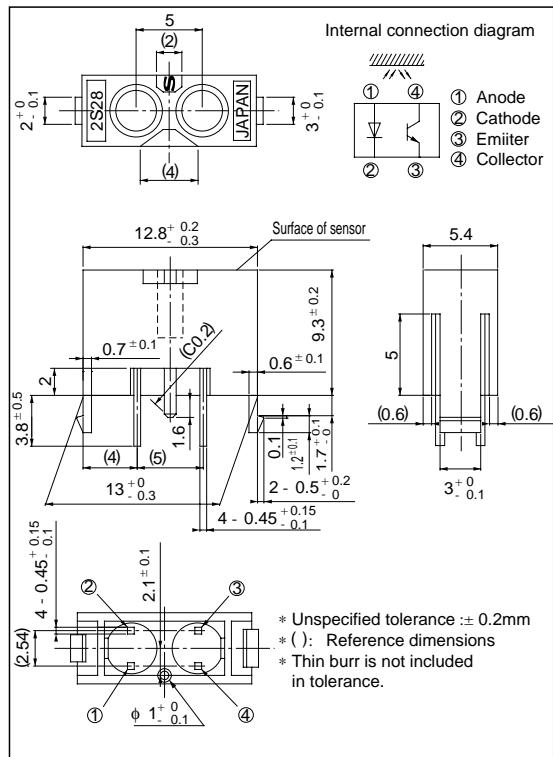

### ■ Absolute Maximum Ratings

(Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	60	mA
	* <sup>1</sup> Peak forward current	I <sub>FM</sub>	1	A
	Reverse voltage	V <sub>R</sub>	6	V
	Power dissipation	P	150	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	35	V
	Emitter-collector voltage	V <sub>ECO</sub>	6	V
	Collector current	I <sub>C</sub>	20	mA
	Collector power dissipation	P <sub>C</sub>	50	mW
Operating temperature		T <sub>opr</sub>	- 25 to + 85	°C
Storage temperature		T <sub>stg</sub>	- 40 to + 85	°C
* <sup>2</sup> Soldering temperature		T <sub>sol</sub>	260	°C

\*1 Pulse width &lt;= 100 μs, Duty ratio: 0.01

\*2 For 5 seconds


## ■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 20mA	-	1.3	1.5	V
	Peak forward voltage	V <sub>FM</sub>	I <sub>F</sub> = 0.5A	-	2.2	3.5	V
	Reverse current	I <sub>R</sub>	V <sub>R</sub> = 3V	-	-	10	μA
Output	Collector current	I <sub>CEO</sub>	V <sub>CE</sub> = 20V	-	1	100	nA
Transfer characteristics	Collector current	I <sub>C</sub>	V <sub>CE</sub> = 5V, I <sub>F</sub> = 20mA, *3	0.04	-	0.9	mA
	Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>F</sub> = 40mA, I <sub>C</sub> = 0.04mA	-	-	0.4	V
	Response time	t <sub>r</sub>	V <sub>CE</sub> = 2V, I <sub>C</sub> = 0.1mA	-	-	20	μs
	Fall time	t <sub>f</sub>	R <sub>L</sub> = 100Ω	-	-	30	μs

\*3 The condition and arrangement of reflective object is shown in the following figure.

### Test Circuit for Response Time

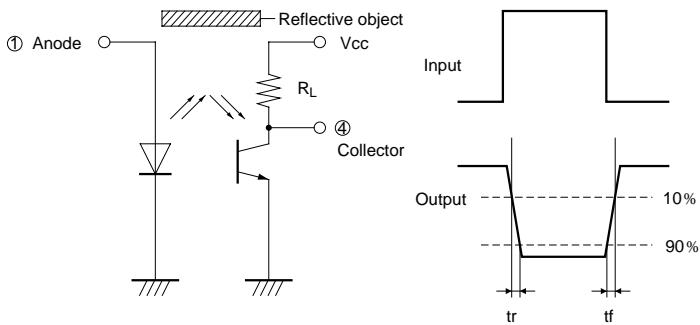

### Test Arrangement of Collector Current

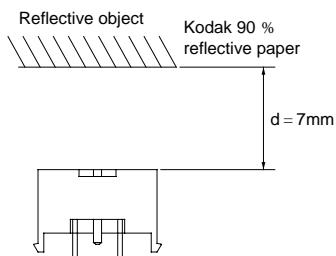


Fig. 1 Forward Current vs.  
Ambient Temperature



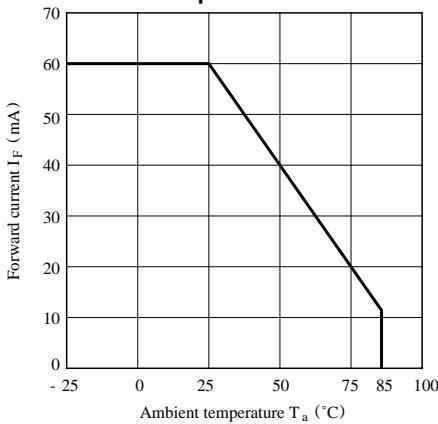



Fig. 2 Collector Power Dissipation vs.  
Ambient Temperature

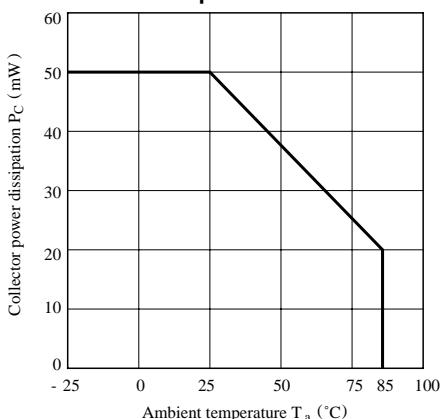


**Fig. 3 Peak Forward Current vs. Duty Ratio**

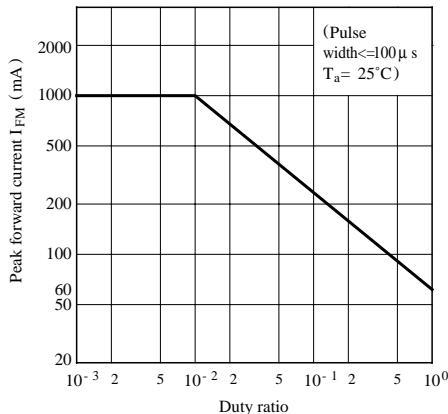


**Fig. 5 Collector-current vs. Forward Currnt**

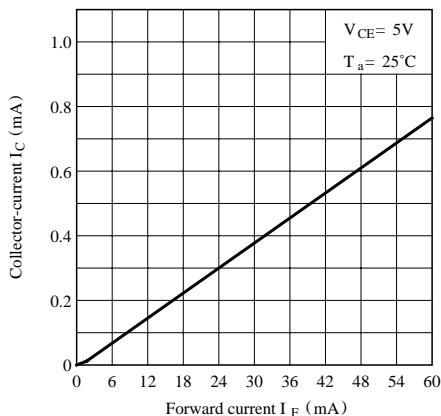


**Fig. 7 Collector Current vs. Ambient Temperature**

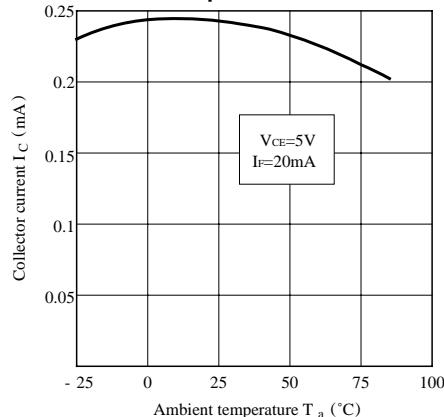


**Fig. 4 Forward Current vs. Forward Voltage**

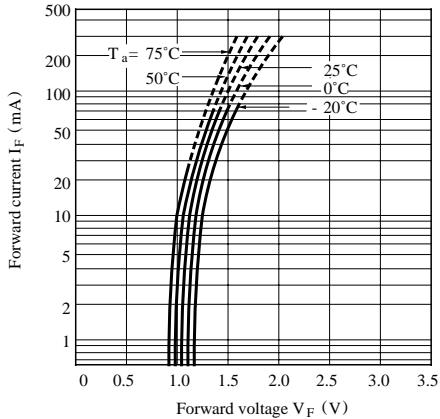



**Fig. 6 Collector Current vs. Collector-emitter Voltage**

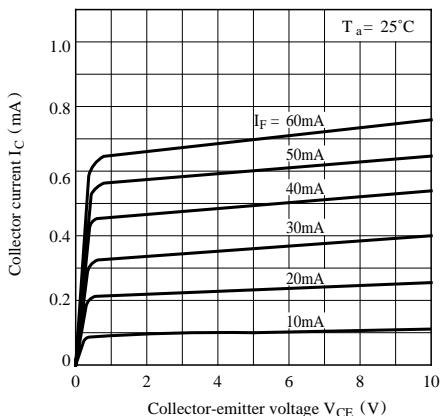

**Fig. 8 Collector Dark Current vs. Ambient Temperature**

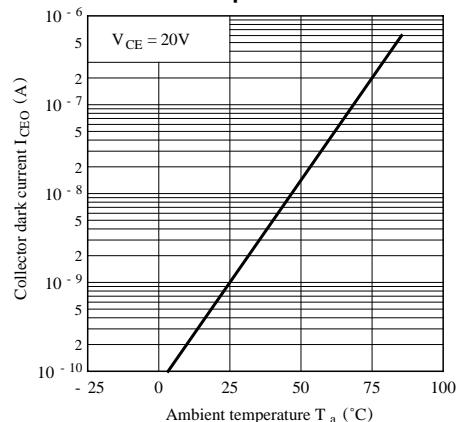

**Fig. 9 Relative Output Current vs.  
Detecting Distance**

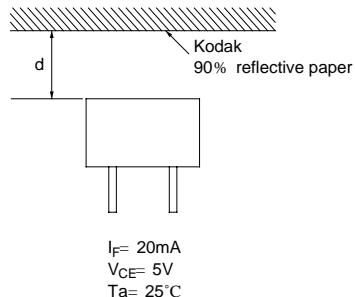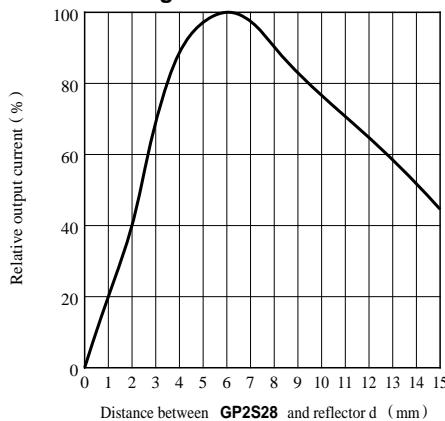

- Please refer to the chapter “Precautions for Use”.