

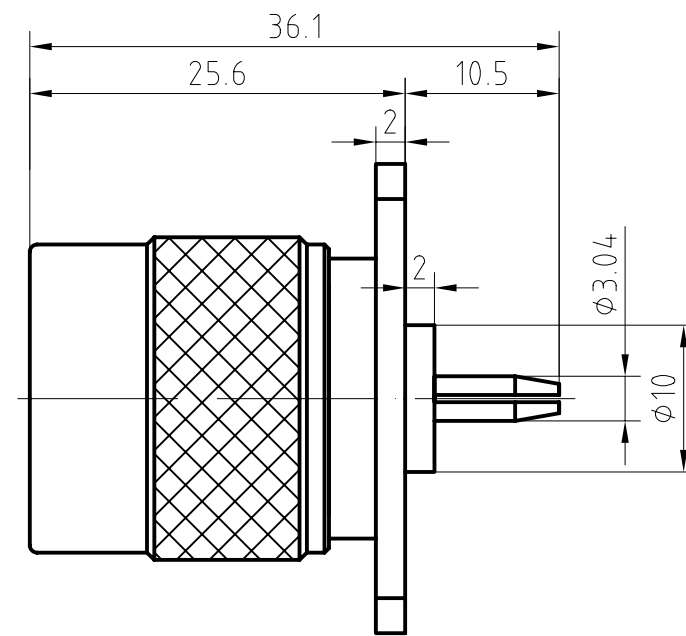


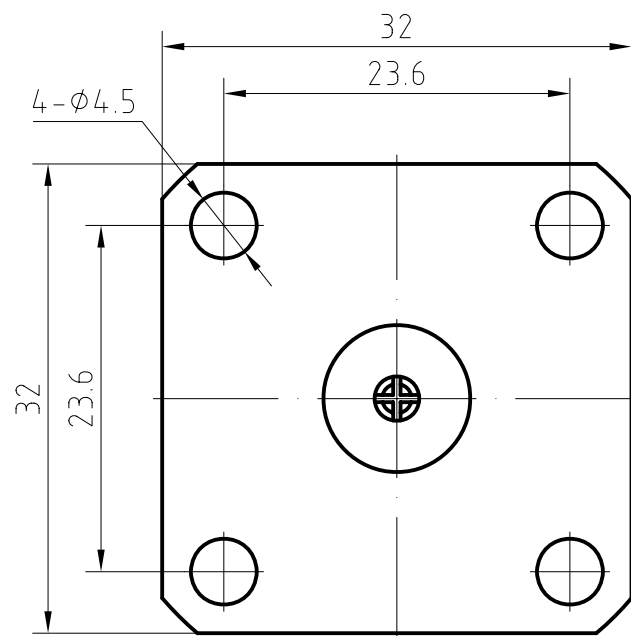

Electrical data:

Impedance:	50 ohm
Frequency range:	DC to 4 GHz
Insertion loss:	$\leq 0.25\text{dB}$
Insulation resistance:	$\geq 5000\text{M}\Omega$
Test voltage:	5000 V rms
Working voltage:	1500 V rms
Contact resistance:	
1). Centre contact:	1.0 m Ω
2). Outer conductor:	0.2 m Ω



4	1	Other parts	Brass	Nickel plated
3	1	Gasket	Silicone rubber	
2	1	Insulator	PTFE	
1	1	Center contact	Beryllium copper	Sliver plated
Item No.	Quantity	Description		Remark
Designed		Scale	1 : 1	Description HN TYPE MALE FL CONNECTOR
Checked		Edition		
Approved		Sheet	1/1	P/N HN-JFD1
Date				12.08.22