


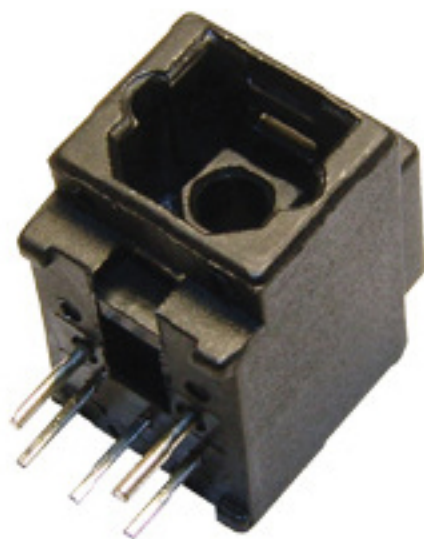

Plug type


Metal fix pin for high heat-resistance

Offer TX/RX (Transmitter / Receiver)


16/25/50 Mbps optical transmitting option

Application: Mother board, Set-top-box, Sound card

DIMENSIONS: in mm

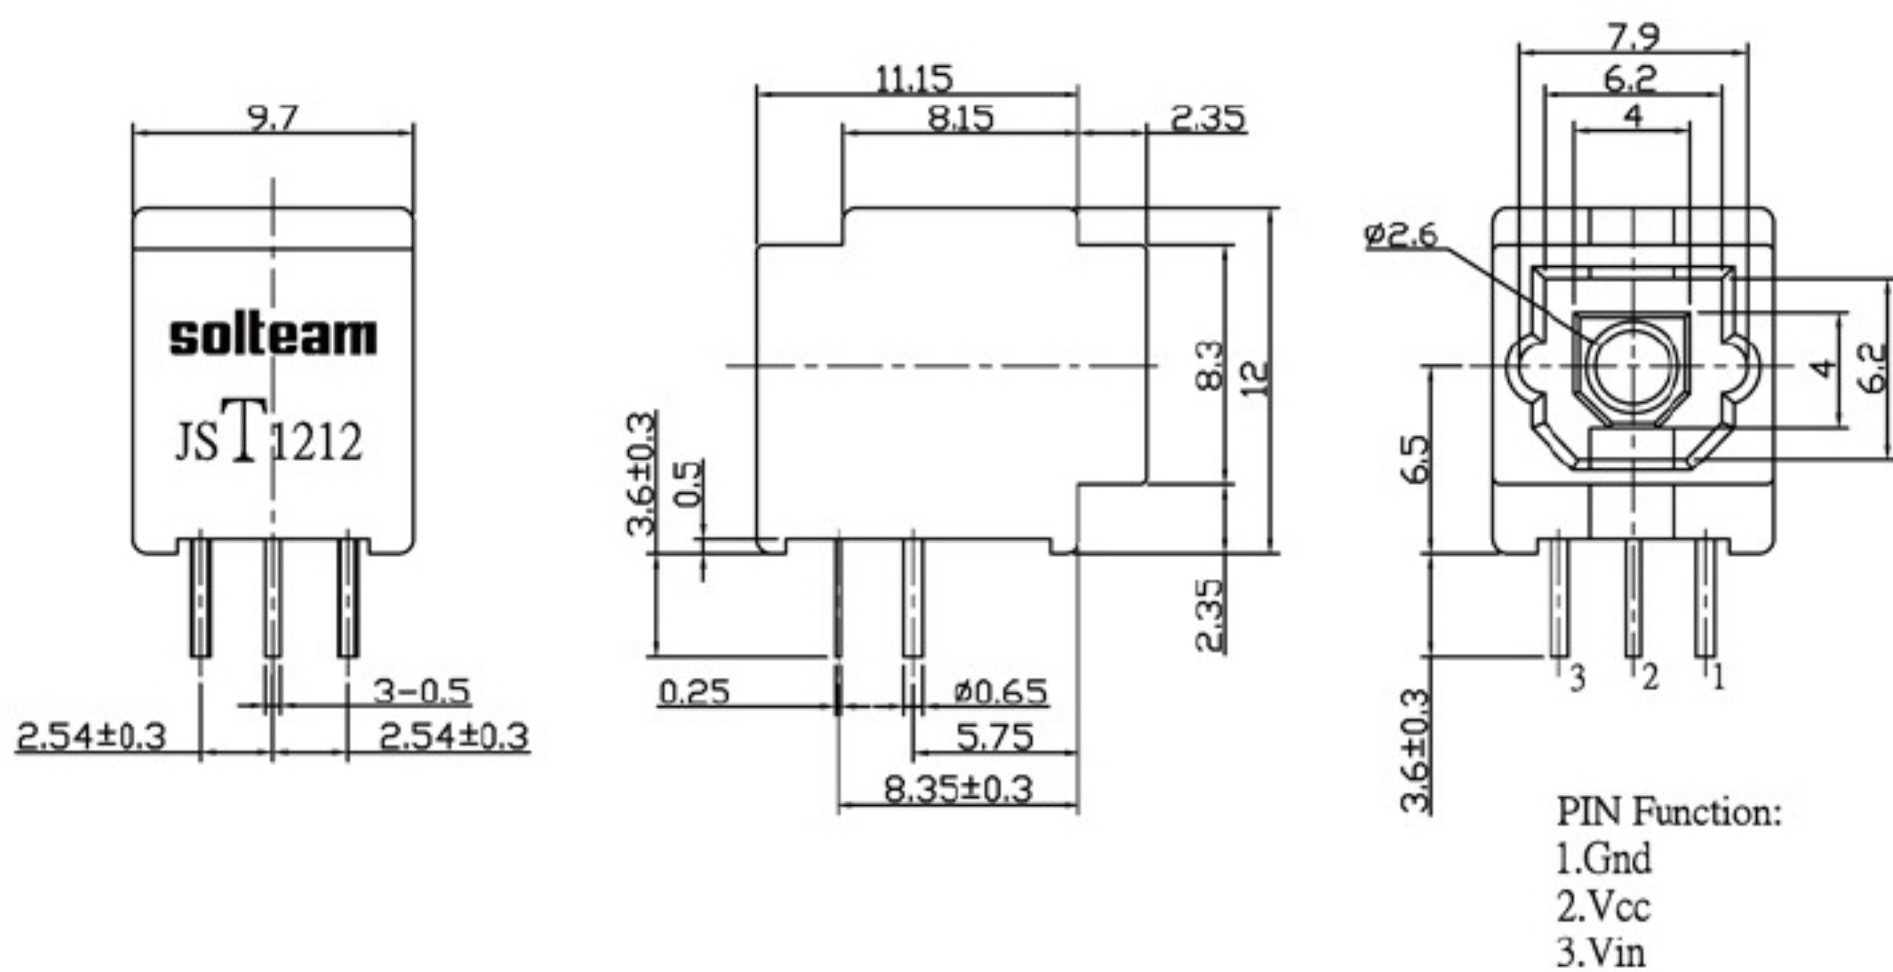

PCB LAYOUT

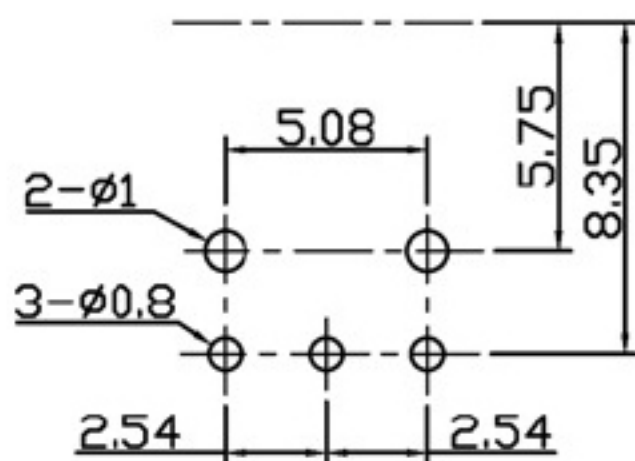

PCB LAYOUT(TOP VIEW)

1. Tolerances ±0.1 mm

2. Substrate Thickness: 1.6 mm