

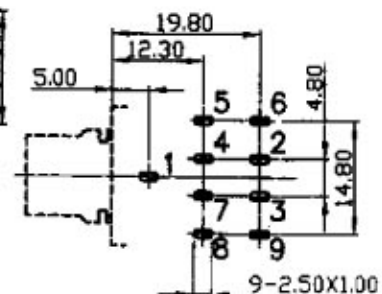
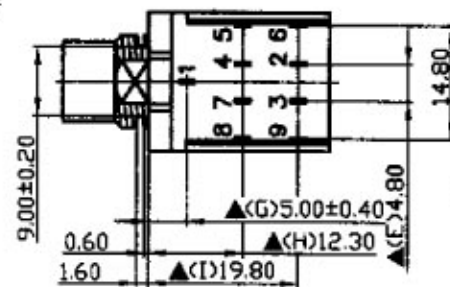

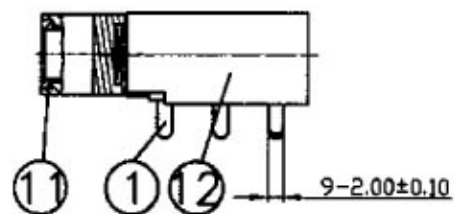
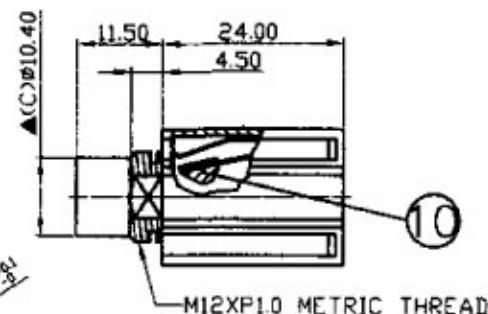
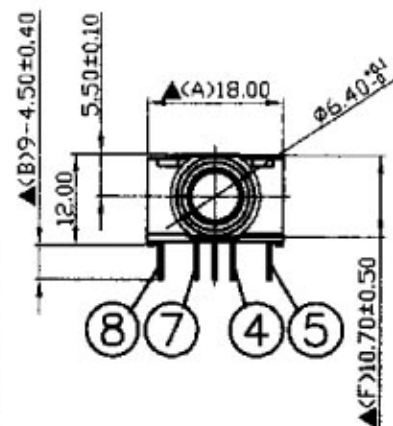





| 15. | Washer            | 0.5T Steel            | 1    | Nickel Plated |
|-----|-------------------|-----------------------|------|---------------|
| 14. | Nut               | 2.0T Steel            | 1    | Nickel Plated |
| 13. | Cover             | PC                    | 1    | Transparent   |
| 12. | Housing           | PBT                   | 1    | Black Color   |
| 11. | Metal Ring        | Brass                 | 1    | Nickel Plated |
| 10. | Insulator         | POM                   | 2    | Black Color   |
| 9.  | Make Terminal     | 0.2T Phosphor Bronze  | 1    | Silver Plated |
| 8.  | Break Terminal    | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 7.  | Transfer Terminal | 0.4T Brass            | 1    | Silver Plated |
| 6.  | Make Terminal     | 0.2T Phosphor Bronze  | 1    | Silver Plated |
| 5.  | Break Terminal    | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 4.  | Transfer Terminal | 0.4T Brass            | 1    | Silver Plated |
| 3.  | Ring Spring       | 0.25T Phosphor Bronze | 1    | Silver Plated |
| 2.  | Tip Spring        | 0.3T Phosphor Bronze  | 1    | Silver Plated |
| 1.  | Earth Terminal    | 0.3T Phosphor Bronze  | 1    | Silver Plated |
| NO. | Description       | Material              | Q'TY | Finish        |

SHALLIN ELECTRONICS CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 10.19.2011 | 李世強 |      |      |         |


PART NAME : 6.3Φ PHONE JACK

Item No. : K3605D

VERSION:4.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark ▲: The Most Important Dimension

RoHS  
Compliant