
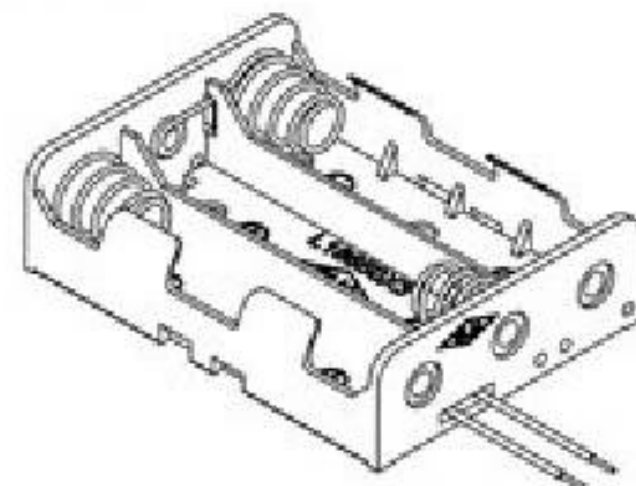


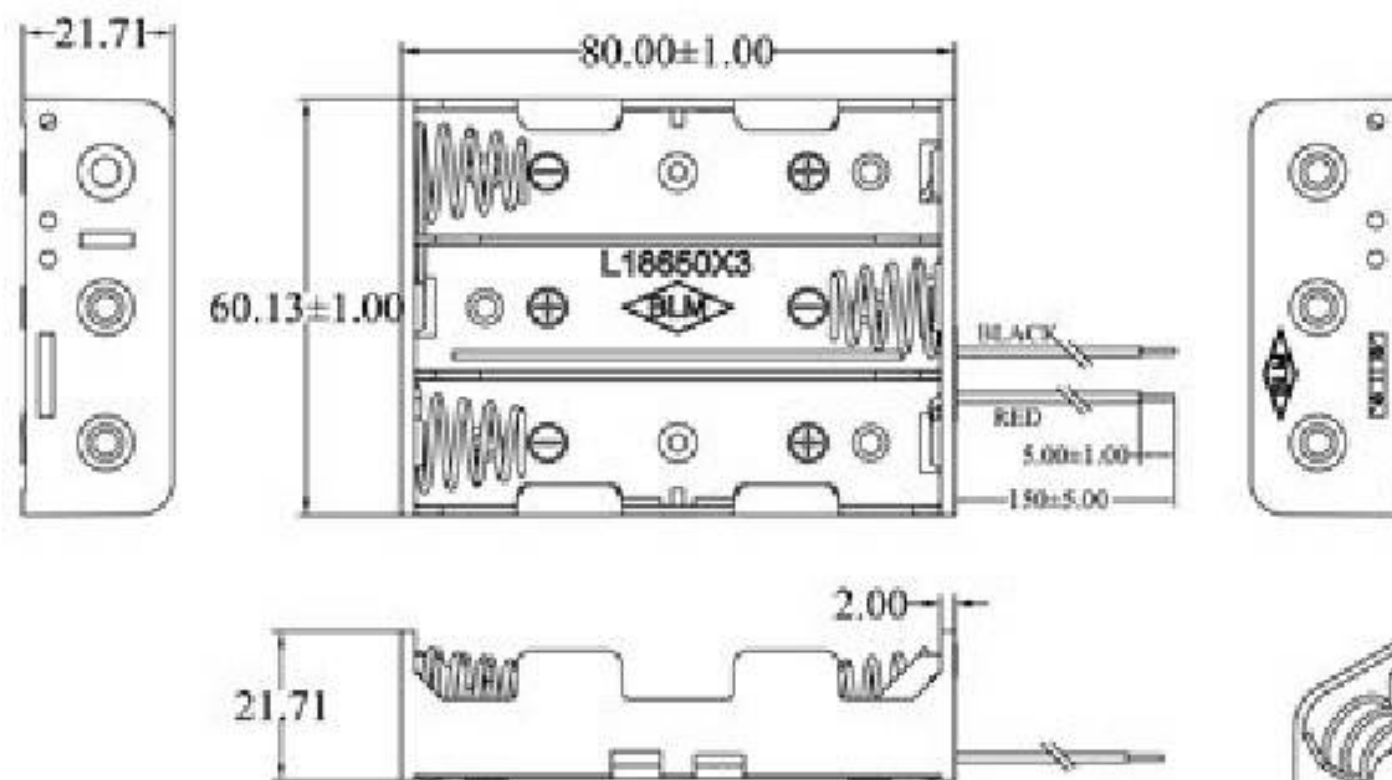

NOTE:

1. Base Material: PP Resin, Black
2. Flammability Rating: UL94-HB or Custom Made
3. Temperature Range: -10℃ to 80℃
4. Wire: UL1007 22 AWG, 300V, 80℃
150±5mm, Strip and Tin 5±1mm
5. Spring: 1.0mm 65C Spring Wire, Nickel Plated
6. Rivets: Brass, Nickel Plated
7. RoHS COMPLIANT

PART NAME			
THREE "18650" CELLS HOLDER			
PROJECTIVE 	TOLERANCES	INCH [MM]	DRN BY
	DECIMAL	±0.020 [+0.30]	HYQ
	ANGULAR	±1.00°	APPB
	UNLESS OTHERWISE SPECIFIED		XGY
DWG NO.		L18650X3S	DATE
			2016-08-08
			SCALE
			1X
			CODE
			L18650