

5W, High reliability AC/DC converter



## FEATURES

- Wide 85 - 305VAC or 100 - 430VDC Input voltage range
- Operating ambient temperature range: -40°C to +85°C
- High I/O isolation test voltage up to 4000VAC
- Low power consumption, High efficiency, High reliability
- Output short circuit, over-current, over-voltage protection
- 5000m altitude application
- Plastic case meets UL94V-0 flammability
- OVC III (meet IEC62477-1, 2000m altitude)
- Meets Emissions CLASS B and surge  $\pm 2KV/\pm 4KV$  without additional circuits

LH05-23BxxR2 series is one of Mornsun's compact size power converter. It features universal AC input and at the same time accepts DC input voltage, low power consumption, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032. The converters are widely used in industrial, office and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

## Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current(Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
EN (Pending)	LH05-23B03R2	4.12	3.3V/1250mA	72	8100
	LH05-23B05R2	5	5V/1000mA	77	6800
	LH05-23B09R2	4.95	9V/550mA	78	1200
	LH05-23B12R2	5.04	12V/420mA	79	1000
	LH05-23B15R2	4.95	15V/330mA	79	680
	LH05-23B24R2	5.52	24V/230mA	82	270

Note: \* Use suffix "A2" for chassis mounting and suffix "A4" for Din-Rail mounting.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	100	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	0.125	A
	230VAC	--	--	0.08	
Inrush Current	115VAC	--	15	--	
	230VAC	--	30	--	
Leakage Current	277VAC/50Hz	0.25mA RMS Max.			
Recommended External Input Fuse		2A/300V, slow-blow, required			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		--	$\pm 2$	--	%
Line Regulation	Full load	--	$\pm 0.5$	--	
Load Regulation	0% - 100% load	--	$\pm 1$	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	--	100	mV
Stand-by Power Consumption	230VAC	--	--	0.3	W
Temperature Coefficient		--	$\pm 0.02$	--	%/°C

Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		≥ 150%, self-recovery			
Over-voltage Protection	3.3/5V output	≤ 7.5VDC (Output voltage clamp)			
	9V output	≤ 15VDC (Output voltage clamp)			
	12/15V output	≤ 20VDC (Output voltage clamp)			
	24V output	≤ 30VDC (Output voltage clamp)			
Minimum Load		0	--	--	%
Hold-up Time	115VAC input	--	15	--	ms
	230VAC input	--	80	--	

Note: \*The "parallel cable" method is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

## General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input - PE	2500	--	--	VAC
	Input - output	4000	--	--	
	Output - PE	1250	--	--	
Impulse Withstand Voltage	Input - PE	6000	--	--	VDC
	Input - output	6000	--	--	
	Output - PE	6000	--	--	
Insulation Resistance	Input - PE	100	--	--	MΩ
	Input - output	100	--	--	
	Output - PE	100	--	--	
Operating Temperature		-40	--	+85	℃
Storage Temperature		-40	--	+85	
Storage Humidity		--	--	95	%RH
Soldering Temperature	Wave-soldering	260 ± 5℃; time: 5 - 10s			
	Manual-welding	360 ± 10℃; time: 3 - 5s			
Power Derating	-40℃ to -25℃	2	--	--	%/℃
	+55℃ to +70℃	3.33	--	--	
	+70℃ to +85℃	0.67	--	--	
	85VAC - 100VAC	1.66	--	--	%/VAC
Safety Standard		Design refer to IEC/UL/EN62368-1			
Safety Class		CLASS I			
MTBF		MIL-HDBK-217F@25℃ >1000,000 h			




## Mechanical Specifications

Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)	
Dimension	Horizontal package	48.50 x 36.00 x 20.50 mm
	A2 chassis mounting	96.10 x 54.00 x 29.00mm
	A4 Din-Rail mounting	96.10 x 54.00 x 33.60mm
Weight	Horizontal package	55g (Typ.)
	A2 chassis mounting	100g (Typ.)
	A4 Din-Rail mounting	140g (Typ.)
Cooling Method	Free air convection	



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
Immunity	ESD	IEC/EN61000-4-2	Contact ±8KV/Air ±15KV	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±4KV	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	perf. Criteria A
		IEC/EN61000-4-5	line to line ±4KV/line to PE ±6KV (See Fig. 2 for recommended circuit)	perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B	

Product Characteristic Curve

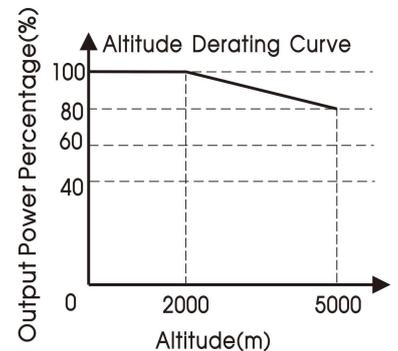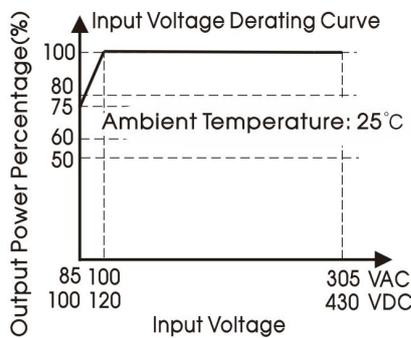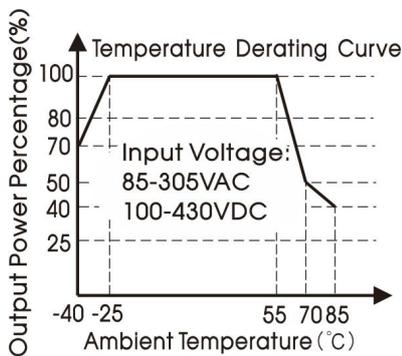

Note: ① With an AC input between 85-100VAC and a DC input between 100-120VDC, the output power must be derated as per temperature derating curves;  
② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

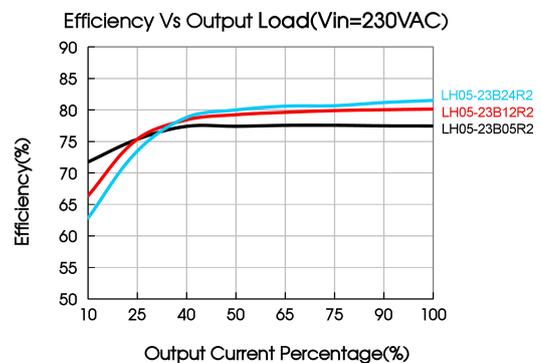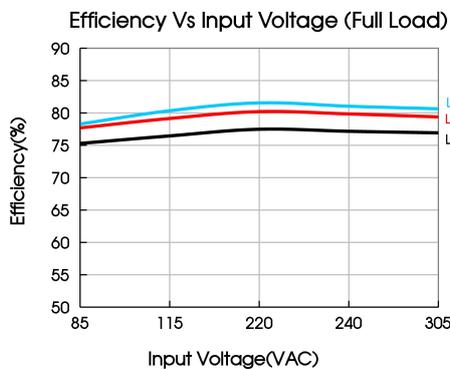

Design Reference

1. Typical application

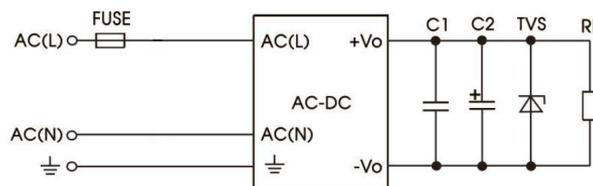


Fig. 1: Typical circuit diagram

型号	C1	C2	FUSE	TVS
LH05-23B03R2	1uF/50V	10uF/16V	2A/300V, slow-blow, required	SMBJ7.0A
LH05-23B05R2		10uF/16V		SMBJ7.0A
LH05-23B09R2		10uF/35V		SMBJ12A
LH05-23B12R2		10uF/35V		SMBJ20A
LH05-23B15R2		10uF/35V		SMBJ20A
LH05-23B24R2		10uF/35V		SMBJ30A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

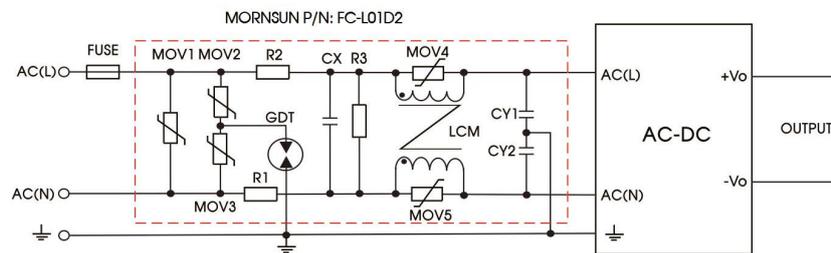



Fig. 2: EMC circuit for harsh requirements

Component	Recommended value	Component	Recommended value
MOV1	S20K350	CY1/CY2	2200pF/400VAC
MOV2/MOV3	S14K350	GDT	B 5G3600
MOV4/MOV5	S07K350	R3	1MΩ /2W (wire-wound resistor)
CX	0.15uF/310VAC	FUSE	3.15A/300V, slow-blow, required
R1/R2	2Ω /3W (wire-wound resistor)		
LCM	10mH, P/N: FL2D-Z5-103 (MORNSUN) is recommended		

Note: R3 can also be replaced by 4 pieces of 1MΩ /1206 SMD resistors in series and parallel.


3. For additional information please refer to application notes on [www.mornsun-power.com](http://www.mornsun-power.com).

Dimensions and Recommended Layout

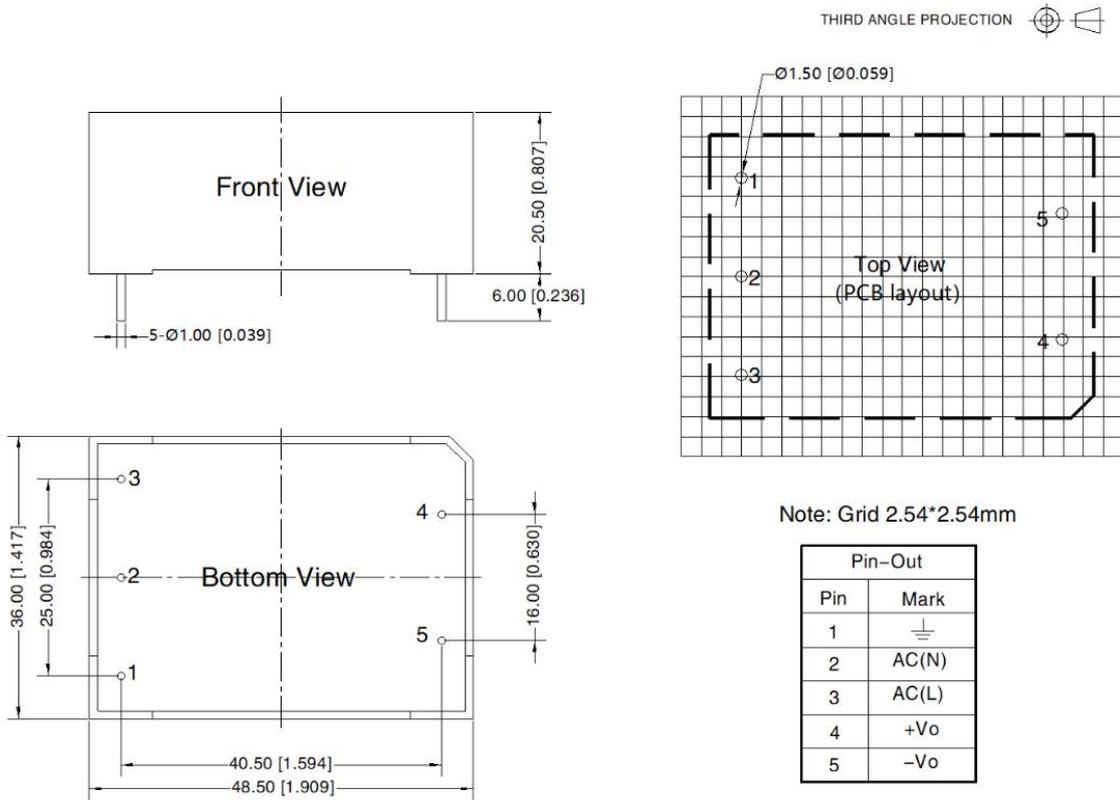


Note:  
Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.50[\pm 0.020]$

A2 Dimensions

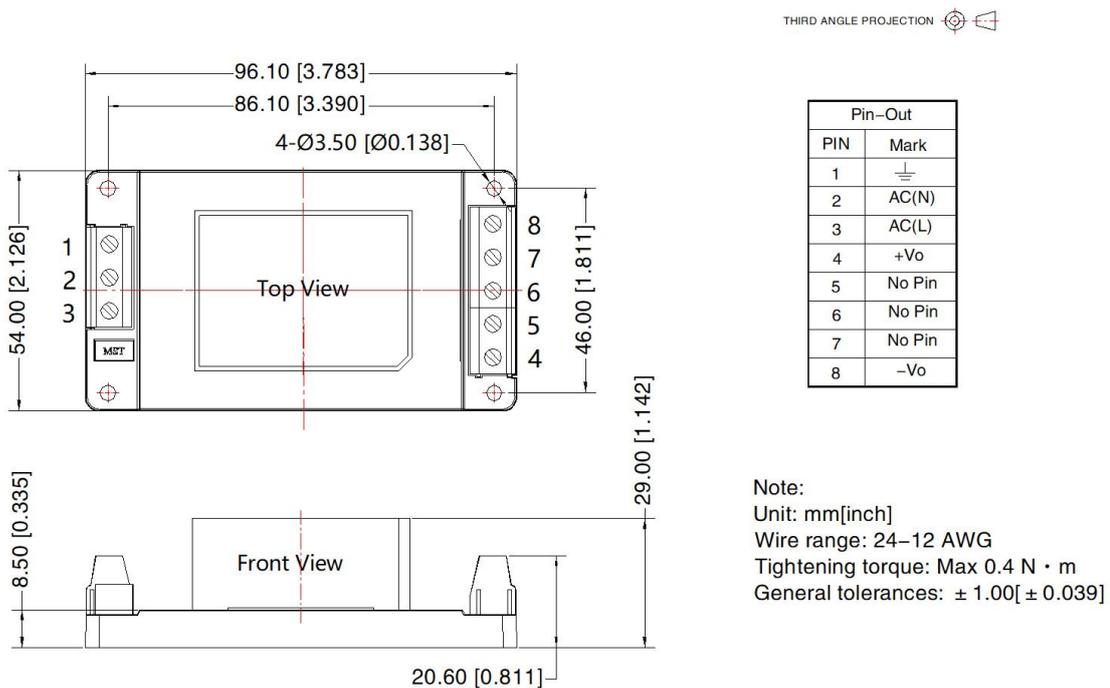

A4 Dimensions

THIRD ANGLE PROJECTION

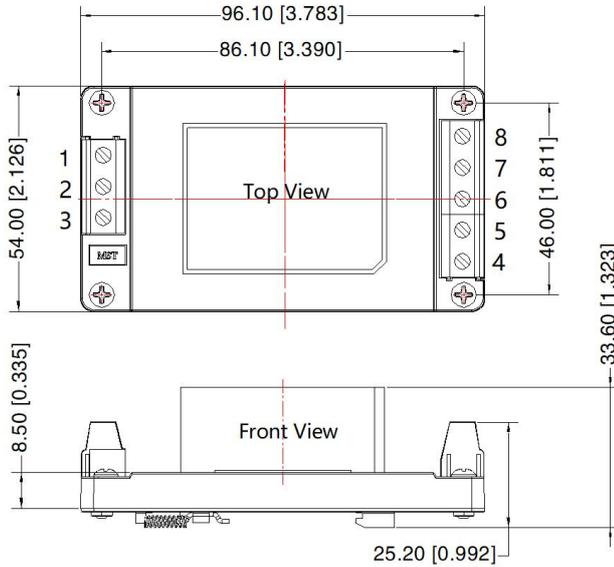

Pin-Out	
PIN	Mark
1	⏏
2	AC(N)
3	AC(L)
4	+Vo
5	No Pin
6	No Pin
7	No Pin
8	-Vo

Note:  
Unit: mm[inch]  
Mounting rail: TS35, rail needs to connect safety ground  
Wire range: 24-12 AWG  
Tightening torque: Max 0.4 N · m  
General tolerances: ± 1.00[± 0.039]

Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220265 (Horizontal package); 58220010 (A2/A4 package);
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)